



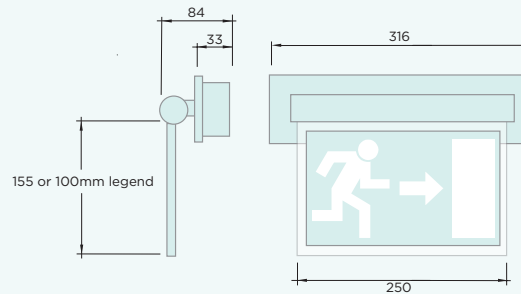

MINI CYLINDER WALL | PHILIP PAYNE

	DALI
	SELF TEST
EN60598-1	
EN60598-2-22	
EN55015	
EN61547	
EN61000-3-2	
STEEL	

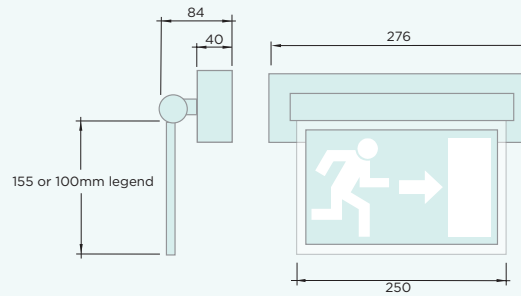

Products should be suffixed with the appropriate finish code. For example: **250MCRHDLV** for Penny Bronze finished product.



To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

Specification

Voltage	230v
IP	20
Weight	1.5kg
Gear Options	230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALI

PART NUMBERS (SURFACE)

250MCSHLA	230v AC/DC	Central Supply
250MCSHLE	230v AC	Central Supply
250MCSHDA	230v AC/DC	Central Supply DALi
250MCSHLM	3hr	Emergency
250MCSHYL	3hr	Self Test
250MCSHDL	3hr	DALi

PART NUMBERS (RECESSED)

250MCRHLA	230v AC/DC	Central Supply
250MCRHLE	230v AC	Central Supply
250MCRHDA	230v AC/DC	Central Supply DALi
250MCRHLM	3hr	Emergency
250MCRHYL	3hr	Self Test
250MCRHDL	3hr	DALi

FINISH OPTIONS

R Satin Chrome	W RAL 9010
C Polished Chrome	G RAL 9006
B Polished Brass	K RAL 9005
D BMA	V Penny Bronze