PHILIP PAYNE | UNI

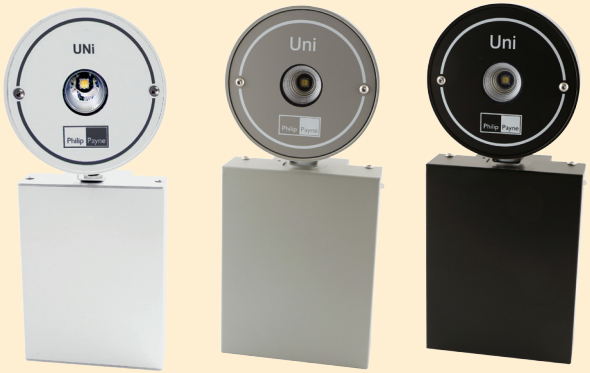





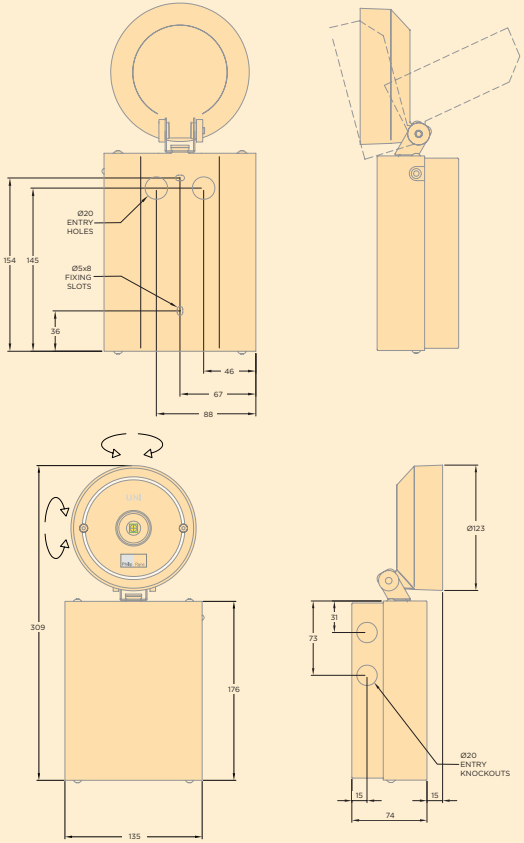

Specification

Supply Voltage	220-240V, 50-60Hz
Beam Angle	29° or 63°
Luminous Flux 29°	258 Lumens
Luminous flux 63°	258 Lumens
Emergency Lighting Factor	100%
LED Watts	2 Watts
LED Drive Current	350mA

PART NUMBERS		29° VERSION
AVUN293LN	3hr	Non-Maintained
AVUN293LA	3hr	Mains/ Central Battery
AVUN293DS	3hr	Non-Maintained DALI
PART NUMBERS		**63° VERSION**
AVUN633LN	3hr	Non-Maintained
AVUN633LA	3hr	Mains/Central Battery
AVUN633DS	3hr	Non-Maintainted DALI

FINISH OPTIONS

W	RAL 9010	K	RAL 9005
G	RAL 9006	V	Penny Bronze

Products should be suffixed with the appropriate finish code.
AVUN293LNG for grey finished product.