




| | |
|--------------------|------|
| CE | F |
| LED | NM |
| MM | DALI |
| SELF TEST | 65 |
| 13 KG | |
| EN60598-1 | |
| EN60598-2-22 | |
| EN55015 | |
| EN61547 | |
| EN61000-3-2 | |
| Aluminium or Steel | |

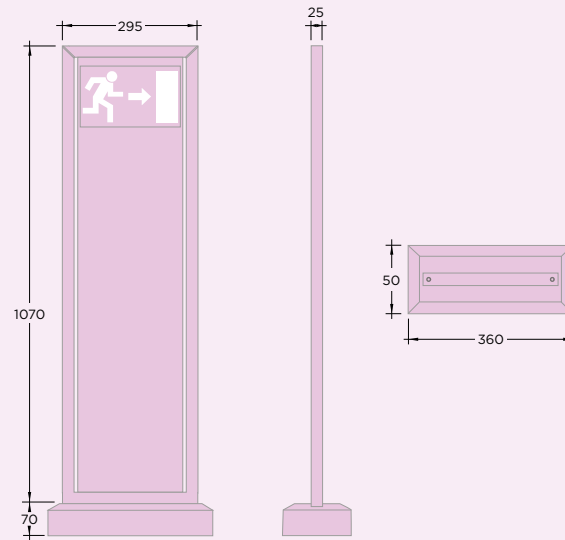

Specification

| | |
|---------------------|---|
| Voltage | 230v |
| IP | 65 |
| Weight | 13kg |
| Gear Options | 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALI |

PART NUMBERS

STAINLESS STEEL

| | |
|----------|-------------------------------|
| EXP105LM | 3hr Maintained/Non-Maintained |
| EXP105YL | Self Test |
| EXP105DL | DALI |

ALUMINIUM POWDER COATED

| | |
|----------|-------------------------------|
| EXA105LM | 3hr Maintained/Non-Maintained |
| EXA105YL | Self Test |
| EXA105DL | DALI |

FINISH OPTIONS

STAINLESS STEEL

R Satin

ALUMINIUM POWDER COATED

G RAL 9006

K RAL 9005

Products should be suffixed with appropriate code. For example: **EXA105DLK** for black finished product