


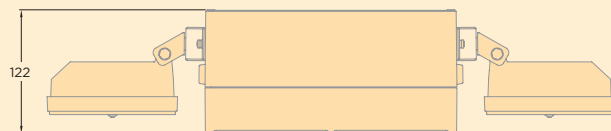
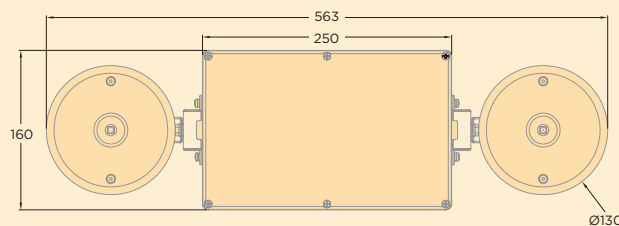


SELF TEST	DALI
EN60598-1	
EN60598-2-22	
EN55015	
EN61547	
EN61000-3-2	
Polycarbonate/ Aluminium	

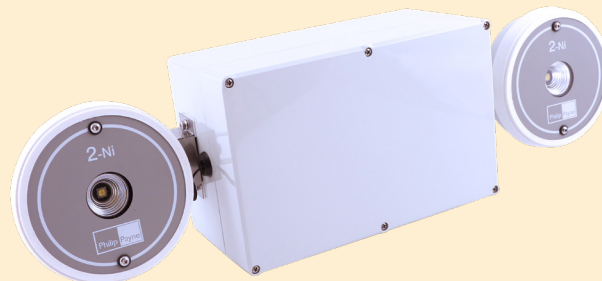

To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

Specification

Supply Voltage	220-240V , 50-60Hz
IP	65
Weight	3.7kg
Beam angle	29° or 63°
Luminous Flux 29°	2 x 325 Lumens
Luminous Flux 63°	2 x 345 Lumens
Emergency Lighting Factor	100%
LED Watts	2 x 3.5 Watts
LED Drive Current	300mA

PART NUMBERS

29° VERSION

AVTN296LNIP	3hr	Non-Maintained
AVTN296LAIP	3hr	Mains/Central Battery
AVTN296DSIP	3hr	Non-Maintained DALI

PART NUMBERS

63° VERSION

AVTN636LNIP	3hr	Non-Maintained
AVTN636LAIP	3hr	Mains/Central Battery
AVTN636DSIP	3hr	Non-Maintained DALI

FINISH OPTIONS

As shown