

300SD Exit sign


Surface Ceiling Mounted LED Emergency Exit Sign

CLASS 1


IP54



	CATALOGUE NUMBER	OPERATION	APPROX. KG	SUPPLY VOLTAGE	MAXIMUM LUMINAIRES ON A TYPE B, 10A CIRCUIT BREAKER
Specto XT	300SDCXT - - - -	Non-maintained or maintained operation via separate switched live termination	1.5 Kg	220-240V AC 50/60Hz	90 Luminaires
DALI AutoTest	300SDCDL - - - -	Non-maintained or maintained operation via separate switched live termination			



Surface Ceiling Mounted

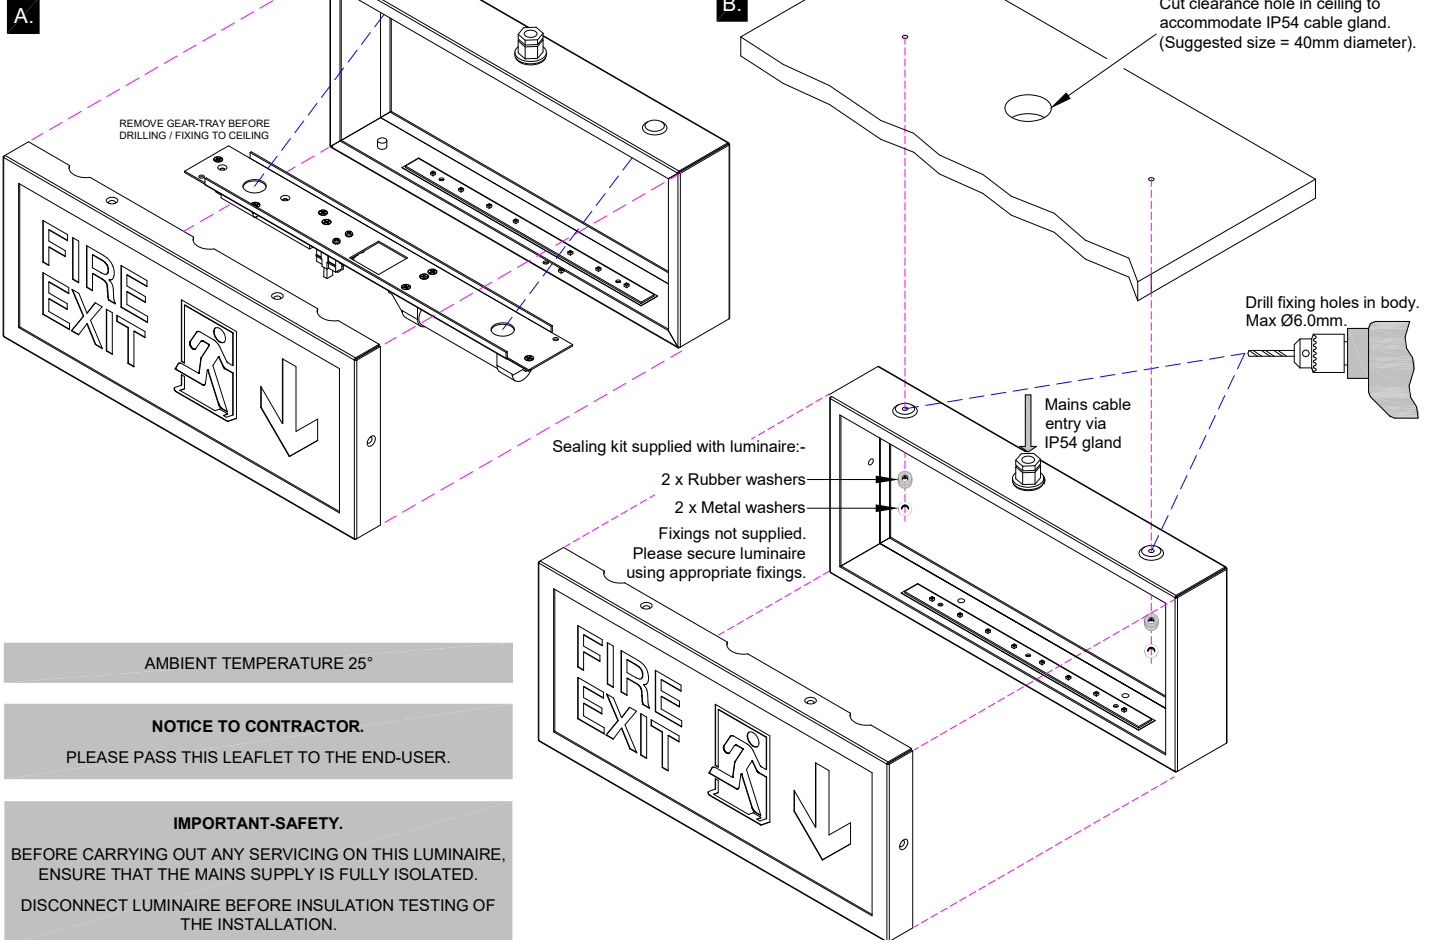

AMBIENT TEMPERATURE 25°


NOTICE TO CONTRACTOR.

PLEASE PASS THIS LEAFLET TO THE END-USER.

IMPORTANT-SAFETY.

BEFORE CARRYING OUT ANY SERVICING ON THIS LUMINAIRE, ENSURE THAT THE MAINS SUPPLY IS FULLY ISOLATED. DISCONNECT LUMINAIRE BEFORE INSULATION TESTING OF THE INSTALLATION.

Dimensions

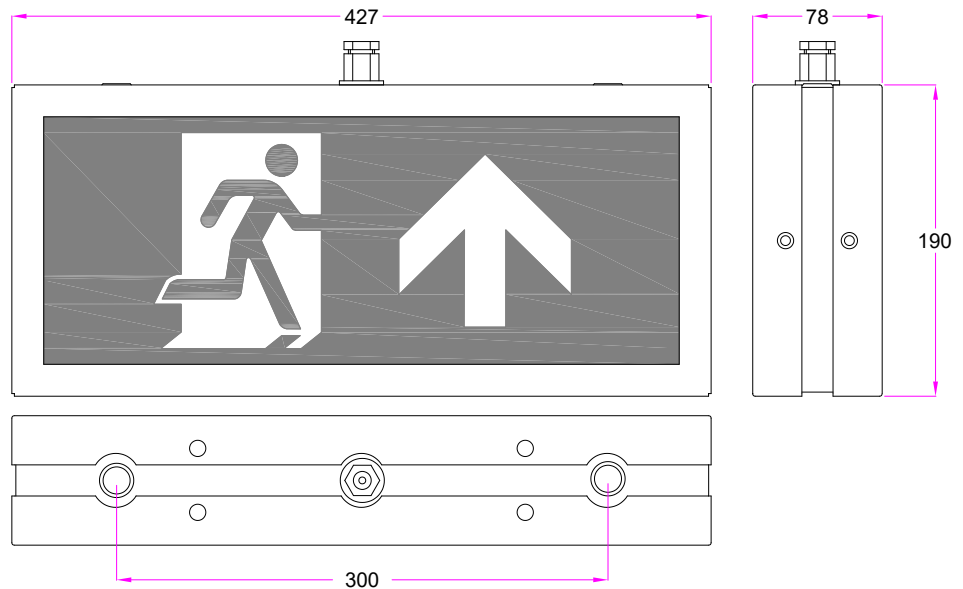

Cover & Legend Panel Removal


A. Use the cover removal tool provided.




C. Locate the tool under the edge of the frame.



B. Secure the legend panel with your hand.

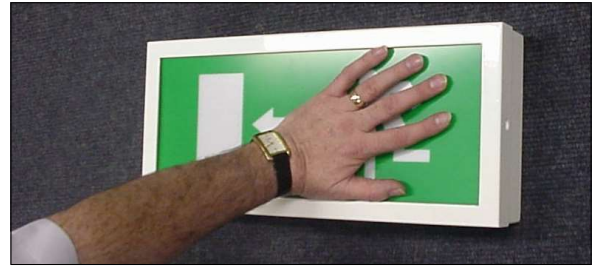

D. Gently pull back on the tool to remove the frame, leaving the legend panel in place.
Lift legend panel off to access the gear-tray.


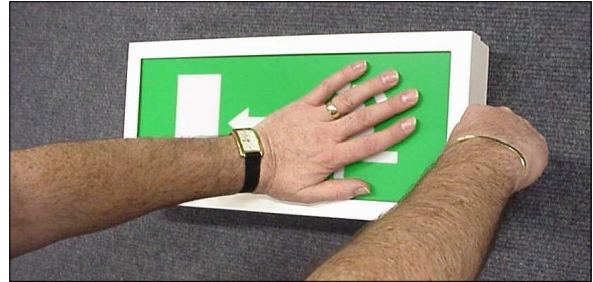


Cleaning Instructions



Connections

(USL=UNSWITCHED LIVE, SL=SWITCHED LIVE)

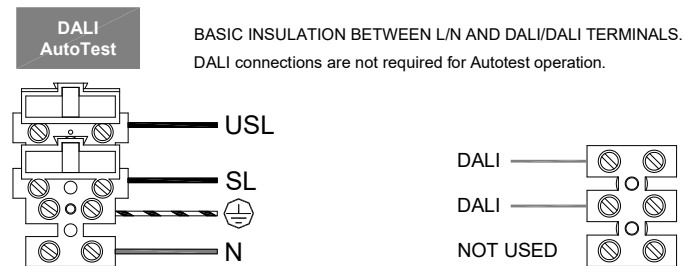

Operation and Maintenance

Continual operation at mains voltages in excess of the rated voltage will reduce LED and expected gear life.

This luminaire uses plastic components in its construction and when installed in environments containing chemicals, degradation may occur.

Please contact our Technical Department for advice.

Modifications

Philip Payne products should not be modified.

Any modification may render the product unsafe and will invalidate any Safety/Approval marks.

Philip Payne will not accept any responsibility for any modified products or for any damage caused as a result of their modification.

Monthly and Annual Tests

Monthly and Annual tests should be carried out in accordance with BS EN 50172:2004, 7.2.

Testing can be carried out by using a sub circuit isolator or by switching off the lighting circuit at the circuit breaker (not for AutoTest or DALI versions).

Battery pack shall be replaced if the specified 3 hour duration is not met.

For replacement battery pack contact Philip Payne Ltd.

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.



Philip Payne Ltd

A SUBSIDIARY OF F.W. THORPE PLC
Thornhill Road, Solihull, B91 2HB, England.

Tel: 0121 705 2384
Fax: 0121 711 2469
e-mail: mail@philippayne.co.uk
Website: http://www.philippayne.co.uk
Philip Payne Ltd registered in England No. 1361523

