


# MINI CF | PHILIP PAYNE



CE	F
MM	NM
LED	DALI
20/30m	
1.5 KG	20
	SELF TEST

EN60598-1
EN60598-2-22
EN55015
EN61547
EN61000-3-2
STEEL

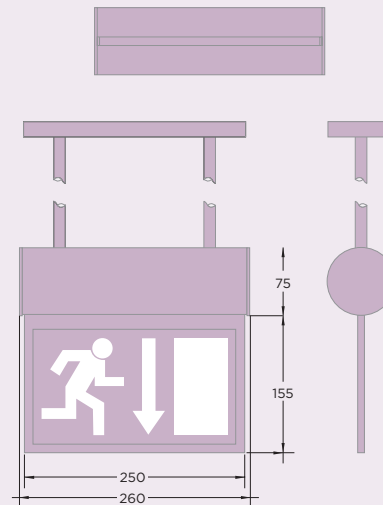

\* Standard product comes with 500mm straight arms, however customised suspensions are available to customer order



To specify a wireless product variant for use with Philip Payne SpectroXT Emergency Lighting System from this range simply replace gear suffix code with XT.

### Specification

<b>Voltage</b>	<b>230v</b>
<b>IP</b>	<b>20</b>
<b>Weight</b>	<b>1.5kg</b>
<b>Gear Options</b>	<b>230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALI</b>

### PART NUMBERS

250CFLA	230v AC/DC	Central Supply
250CFDA	230v AC/DC	Central Supply DALI
250CFLM	3hr Self Contained	Maintained/ Non-Maintained
250CFYL	3hr Self Contained	Maintained/ Non-Maintained Self Test
250CFDL	3hr Self Contained	DALI

### FINISH OPTIONS

<b>R</b> Satin Chrome	<b>W</b> RAL 9010
<b>C</b> Polished Chrome	<b>G</b> RAL 9006
<b>B</b> Polished Brass	<b>K</b> RAL 9005
<b>D</b> BMA	<b>V</b> Penny Bronze

Products should be suffixed with appropriate code. For example: **250CFDLV** for penny bronze finished product.