




CE	F
MM	NM
LED	SELF TEST
20	DALI
20/30m	1.5 KG
EN60598-1	
EN60598-2-22	
EN55015	
EN61547	
EN61000-3-2	
STEEL	

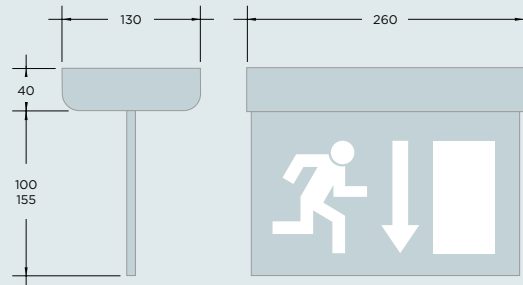

250SR CEILING | 1880

SpectoXT

To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

Specification

Voltage	230v
IP	20
Weight	1.5kg
Gear Options	230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALi

PART NUMBERS

250SRLA	230v AC/DC	Central Supply
250SRDA	230v AC/DC	Central Supply DALi
250SRLM	3hr Self Contained	Maintained/ Non-Maintained
250SRYL	3hr Self Contained	Self Test
250SRDL	3hr Self Contained	DALi

FINISH OPTIONS


R Satin Chrome	W RAL 9010
C Polished Chrome	G RAL 9006
B Polished Brass	K RAL 9005
D BMA	V Penny Bronze

Products should be suffixed with appropriate code.
For example: **250SLLMV** for penny bronze finished product.

1880 | 250SR WALL



CE	F
MM	NM
LED	SELF TEST
20	DALI
20/30m	1.5 KG
EN60598-1	
EN60598-2-22	
EN55015	
EN61547	
EN61000-3-2	
STEEL	

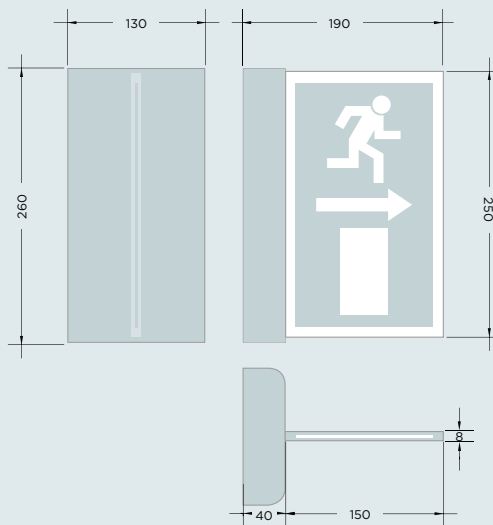

SpectoXT
 To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

Specification

Voltage	230v
IP	20
Weight	1.5kg
Gear Options	230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALI

PART NUMBERS

250SRLA	230v AC/DC	Central Supply
250SRDA	230v AC/DC	Central Supply DALI
250SRLM	3hr Self Contained	Maintained/ Non-Maintained
250SRYL	3hr Self Contained	Self Test
250SRDL	3hr Self Contained	DALI

FINISH OPTIONS

R Satin Chrome	W RAL 9010
C Polished Chrome	G RAL 9006
B Polished Brass	K RAL 9005
D BMA	V Penny Bronze

Products should be suffixed with appropriate code.
 For example: **250SRLMV** for penny bronze finished product.