




| | |
|--|------------------|
| | |
| | |
| | SELF TEST |
| | DALI |
| | |

- EN60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2
- Aluminium

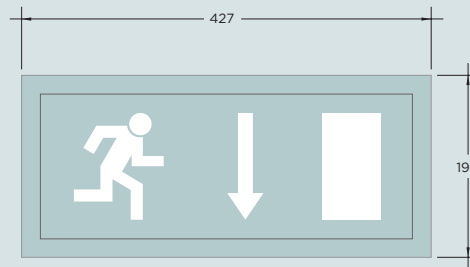

SpectoXT To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

Specification

| | |
|---------------------|---|
| Voltage | 230v |
| IP | 54 |
| Weight | 1.5kg |
| Gear Options | 230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALI |

PART NUMBERS

| | | |
|---------|--------------------|-------------------------------|
| 300SCLA | 230v AC/DC | Central Supply |
| 300SCDA | 230v AC/DC | Central Supply DALI |
| 300SCLM | 3hr Self Contained | Maintained/ Non-Maintained |
| 300SCYL | 3hr Self Contained | Self Test |
| 300SCDL | 3hr Self Contained | DALI |

FINISH OPTIONS

- W** RAL 9016
- G** RAL 9006
- K** RAL 9005
- V** Penny Bronze

Products should be suffixed with appropriate code. For example: **300SCLMW** for white finished product