

CLASSIC CYLINDER | CBH/CBV



SpectroXT

To specify a wireless product variant for use with Philip Payne SpectroXT Emergency Lighting System from this range simply replace gear suffix code with XT.

Specification

| | |
|---------------------|---|
| Voltage | 230v |
| IP | 20 |
| Weight | 1.5kg |
| Gear Options | 230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALi |

PART NUMBERS - CBH - (WALL MOUNTED)




| | | |
|------------|--------------------|---------------------------|
| 300CBH05LA | 230v AC/DC | Central Supply |
| 300CBH05DA | 230v AC/DC | Central Supply DALi |
| 300CBH05LM | 3hr Self Contained | Maintained/Non-Maintained |
| 300CBH05YL | 3hr Self Contained | Self Test |
| 300CBH05DL | 3hr Self Contained | DALi |

PART NUMBERS - CBV - (CEILING MOUNTED)

| | | |
|------------|--------------------|---------------------------|
| 300CBV**LA | 230v AC/DC | Central Supply |
| 300CBV**DA | 230v AC/DC | Central Supply DALi |
| 300CBV**LM | 3hr Self Contained | Maintained/Non-Maintained |
| 300CBV**YL | 3hr Self Contained | Self Test |
| 300CBV**DL | 3hr Self Contained | DALi |

FINISH OPTIONS

| | |
|--------------------------|-----------------------|
| R Satin Chrome | W RAL 9010 |
| C Polished Chrome | G RAL 9006 |
| B Polished Brass | K RAL 9005 |
| D BMA | V Penny Bronze |

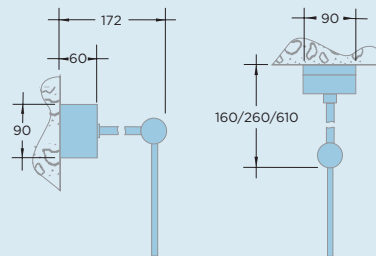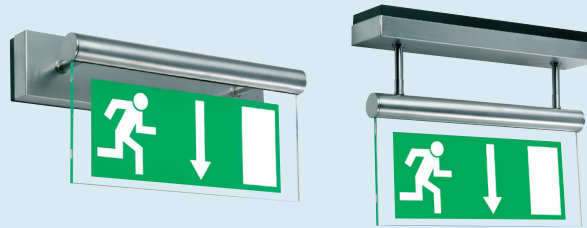

** Add in rod length requirement:
50mm/05 length - e.g. **300CBV05LM**
150mm/15 length - e.g. **300CBV15LM**
500mm/50 length - e.g. **300CBV50LM**

Products should be suffixed with appropriate code.
For example: **300CBV05LMR** for satin chrome finished product.

| | |
|--------|-----------|
| CE | F |
| MM | NM |
| LED | SELF TEST |
| DALI | DALI |
| 20/30m | 20 |
| | 1.5 KG |

- EN60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2
- STEEL