




CE	F
MM	NM
LED	DALI
SELF TEST	SELF TEST
20/30m	20
CDA	1.5 KG
EN60598-1	
EN60598-2-22	
EN55015	
EN61547	
EN61000-3-2	
PC ABS	

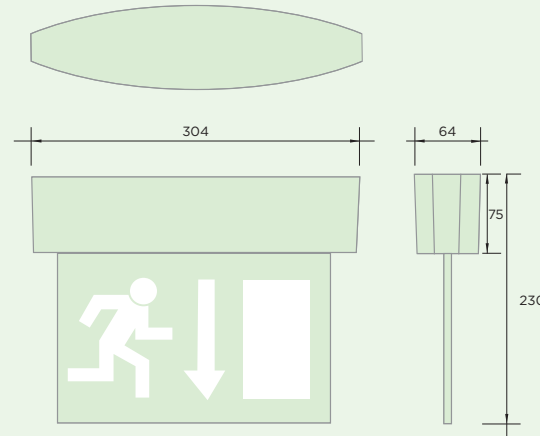

To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

Specification

Voltage	230v
IP	20
Weight	1.5kg
Gear Options	230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALi

PART NUMBERS

S7001LE	♥ 230v AC	Central Supply
S7001LM	♥ 3hr Self Contained	Maintained/ Non-Maintained
S7001YL	♥ 3hr Self Contained	Self Test
S7001DL	♥ 3hr Self Contained	DALI
S7WBK1	Wall Mounting Bracket	

FINISH OPTIONS

W	RAL 9010
G	RAL 9006
K	RAL 9005
V	Penny Bronze

Products should be suffixed with appropriate code. For example: **S7001DLK** for Black finished product.