


LANTIS | PHILIP PAYNE

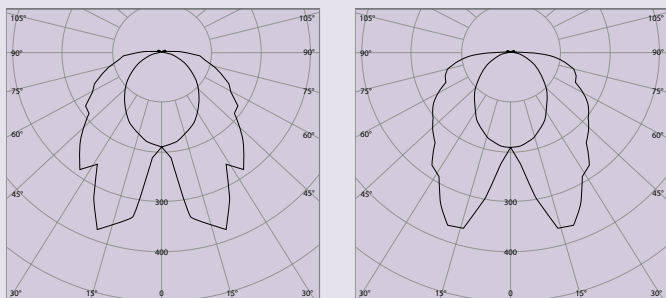

| | |
|---------------|-----------|
| CE | F |
| LED | NM |
| MM | SELF TEST |
| DALI | 65 |
| 1.5 KG | |
| EN60598-1 | |
| EN60598-2-22 | |
| EN55015 | |
| EN61547 | |
| EN61000-3-2 | |
| Polycarbonate | |

**Specification**

| | |
|-------------------|-------------|
| Supply Voltage | 230V |
| IP | 65 |
| Weight | 1.5kg |
| Luminous Flux-110 | 545 Lumens |
| Luminous Flux-300 | 950 Lumens |
| Luminous Flux-350 | 1655 Lumens |

PART NUMBERS

| | | |
|------------|--------------------|------------------------------------|
| LANT110LM | 3hr Self Contained | Maintained/ Non-Maintained |
| LANT110DL* | 3hr Self Contained | Maintained DALi/ Non-Maintained |
| LANT300LN | 3hr Self Contained | Non-Maintained |
| LANT300DS | 3hr Self Contained | Non-Maintained DALi |
| LANT350LA | 230v AC/DC | Central Supply |
| LANT350DA | 230v AC/DC | Central Supply DALi |

*Mains mode is not switchable via DALi command on self-contained luminaires. DALi is for controlled testing and monitoring only. Please contact technical for more information.

FINISH OPTIONS

As shown