

300SW




- IP20**
- 26m**
- 230v** **DALI**
- NM/MM**

1W



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

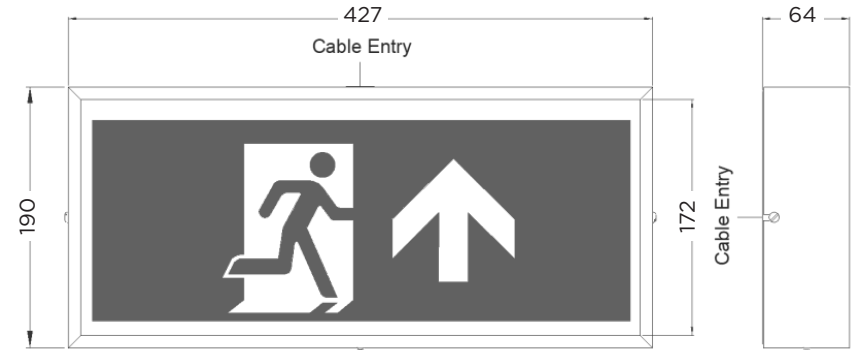

EXAMPLE PRODUCT CODE		300SW	XT	W
PRODUCT	300SW	300SW		
CONTROL	CENTRAL BATTERY	LA		
	CENTRAL BATTERY DALI	DA		
	DALI MAINTAINED	DL		
	SELF TEST MAINTAINED	YL		
	MAINTAINED	LM		
	SPECTO-XT MAINTAINED	XT		
COLOUR	RAL 9016 (WHITE)	W		
	RAL 9006 (GREY)	G		
	RAL 9005 (BLACK)	K		
	POLISHED BRASS	B		
	POLISHED CHROME	C		
	ANTIQUE BRASS	E		
	SATIN CHROME	R		
	PENNY BRONZE	V		

300SWXTW 300SW | Specto-XT Maintained | White Finish

EXAMPLE PRODUCT CODE		34ISO	354
LEGEND TYPE	ISO 7010	34ISO	
DIRECTION	SINGLE SIDED UP	353	
	SINGLE SIDED DOWN	354	
	SINGLE SIDED RIGHT	355	
	SINGLE SIDED LEFT	356	

34ISO353 ISO 7010 | Single Sided Arrow Up



FEATURES & BENEFITS

- Specto-XT wireless technology removes the need for control cabling, ideal for retro-fit installations
- Strong and robust body with high impact resistance
- Tool-less and screw-less second fix legend and cover for fast installations
- Single sided aluminium bodied luminaire with powder coating finish
- Choice of colour options