


LUL300



- IP54**
- WARRANTY**
- 26m**
- 1.5 KG**
- 230v**
- DALI**
- 1W**
- NM/MM**



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

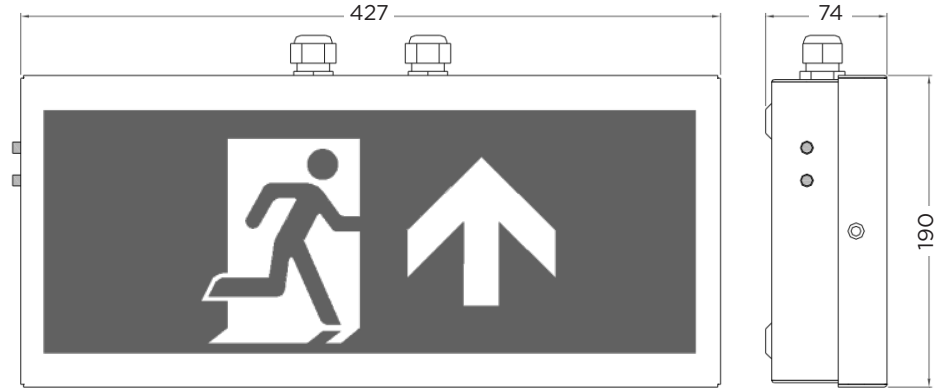

EXAMPLE PRODUCT CODE		LUL300	SWLA	W
PRODUCT	LUL300	LUL300		
CONTROL	CENTRAL BATTERY	SWLA		
	MAINTAINED	SWLM		
	UNISTRUT TWIN LED	USTL		
	SURFACE WALL TWIN LED	SWTL		
COLOUR	RAL 9016 (WHITE)	W		

LUL300SWLMW LUL300SW | Maintained | White Finish

EXAMPLE PRODUCT CODE		36LUL	357
LEGEND TYPE	BS 5499	36LUL	
DIRECTION	SINGLE SIDED UP	357	
	SINGLE SIDED DOWN	358	
	SINGLE SIDED RIGHT	359	
	SINGLE SIDED LEFT	360	

36LUL357 BS 5499 | Single Sided Arrow Up



FEATURES & BENEFITS

- Strong and robust body with high impact resistance
- Tool-less and screw-less second fix legend and cover for fast installations
- Single sided aluminium bodied luminaire with powder coating finish