



PHILIP PAYNE | MINI CYLINDER CEILING

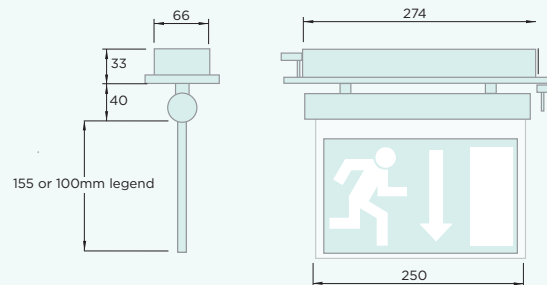

MM 	NM
LED 	DALI
	SELF TEST
 20/30m	 20
EN60598-1	
EN60598-2-22	
EN55015	
EN61547	
EN61000-3-2	
STEEL	

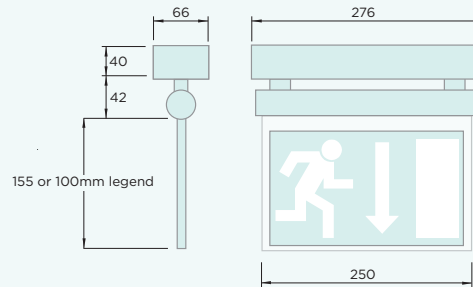

Products should be suffixed with the appropriate finish code.
For example: **250MCRVDLV** for Penny Bronze finished product.



To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

Specification

Voltage	230v
IP	20
Weight	1.5kg
Gear Options	230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALi

PART NUMBERS (SURFACE)

250MCSVLA	230v AC/DC	Central Supply
250MCSVLE	230v AC	Central Supply
250MCSVDA	230v AC/DC	Central Supply DALi
250MCSVLM	3hr	Emergency
250MCSVYL	3hr	Self Test
250MCSVDL	3hr	DALi

PART NUMBERS (RECESSED)

250MCRVLA	230v AC/DC	Central Supply
250MCRVLE	230v AC	Central Supply
250MCRVDA	230v AC/DC	Central Supply DALi
250MCRVLM	3hr	Emergency
250MCRVYL	3hr	Self Test
250MCRVDL	3hr	DALi

FINISH OPTIONS

R Satin Chrome	W RAL 9010
C Polished Chrome	G RAL 9006
B Polished Brass	K RAL 9005
D BMA	V Penny Bronze