




## 250CM | ARCHITECTURAL RANGE

CE	F
MM 	NM 
LED 	DALI
	SELF TEST
20/30m 	20 
CDA 	1.5 KG 
EN60598-1	
EN60598-2-22	
EN55015	
EN61547	
EN61000-3-2	
STEEL	

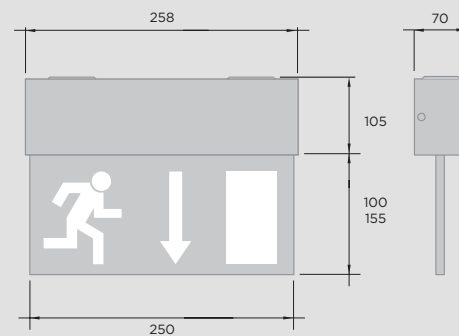

To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

### Specification

<b>Voltage</b>	<b>230v</b>
<b>IP</b>	<b>20</b>
<b>Weight</b>	<b>1.5kg</b>
<b>Gear Options</b>	<b>230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALi</b>

### PART NUMBERS

250CMLA	230v AC/DC	Central Supply
250CMLE	230v AC	Central Supply
250CMDA	230v AC/DC	Central Supply DALi
250CMLM	3hr Self Contained	Maintained/ Non-Maintained
250CMYL	3hr Self Contained	Self Test
250CMDL	3hr Self Contained	DALI

### ROD SUSPENSION KIT

250RSK	Comprising 1 pair of 500mm rods (can be cut to size on site plus ceiling fixing plate & cover)
--------	--

### FINISH OPTIONS

<b>R</b> Satin Chrome	<b>W</b> RAL 9010
<b>C</b> Polished Chrome	<b>G</b> RAL 9006
<b>B</b> Polished Brass	<b>K</b> RAL 9005
<b>D</b> BMA	<b>V</b> Penny Bronze

Products should be suffixed with appropriate code. For example: **250CMLMK** for black finished product. **Rod Suspension Kit:** For example: **250RSKK** for black finished product.