



250FW | 1880



CE	F
MM	NM
LED	SELF TEST
20	DALI
20/30m	1.5 KG

- EN60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2
- STEEL

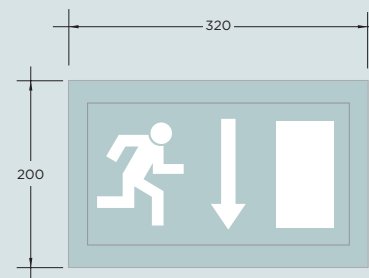

To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

Specification

Voltage	230v
IP	20
Weight	1.5kg
Gear Options	230v central Supply 3hr Non-Maintained 3hr Maintained 3hr Self Test 3hr DALi

PART NUMBERS

250FWLA	230v AC/DC	Central Supply
250FWLM	3hr Self Contained	Maintained/ Non-Maintained
250FWYL	3hr Self Contained	Self Test
250FWDL	3hr Self Contained	DALi

FINISH OPTIONS

- W** RAL 9010
- G** RAL 9006
- K** RAL 9005
- V** Penny Bronze

Products should be suffixed with appropriate code. For example: **250FWLMV** for penny bronze finished product.