


# 300DW | 1880



CE	F
MM	NM
LED	SELF TEST
20	DALI
20/30m	1.5 KG

- EN60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2
- STEEL

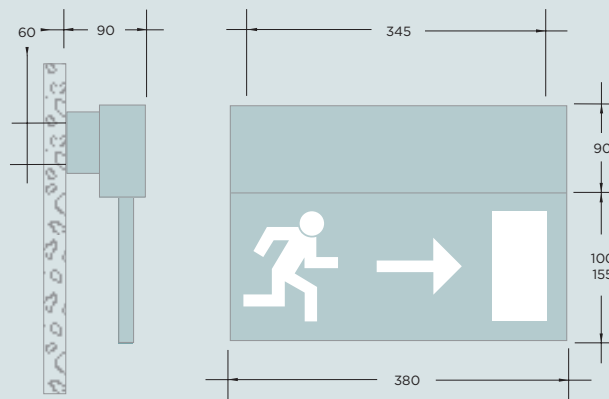

To specify a wireless product variant for use with Philip Payne SpectoXT Emergency Lighting System from this range simply replace gear suffix code with XT.

### Specification

<b>Voltage</b>	<b>230v</b>
<b>IP</b>	<b>20</b>
<b>Weight</b>	<b>1.5kg</b>
<b>Gear Options</b>	<b>230v central Supply</b> <b>3hr Non-Maintained</b> <b>3hr Maintained</b> <b>3hr Self Test</b> <b>3hr DALI</b>

### PART NUMBERS

300DWLA	230v AC/DC	Central Supply
300DWDA	230v AC/DC	Central Supply DALI
300DWLM	3hr Self Contained	Maintained/ Non-Maintained
300DWYL	3hr Self Contained	Self Test
300DWDL	3hr Self Contained	DALI

### FINISH OPTIONS

<b>R</b> Satin Chrome	<b>W</b> RAL 9010
<b>C</b> Polished Chrome	<b>G</b> RAL 9006
<b>B</b> Polished Brass	<b>K</b> RAL 9005
<b>D</b> BMA	<b>V</b> Penny Bronze

Products should be suffixed with appropriate code. For example: **300DWDLW** for white finished product.