



# SPRE860



- IP20
- NM/MM
- 5 WARRANTY
- KG 0.7
- 230v
- DALI
- 2W

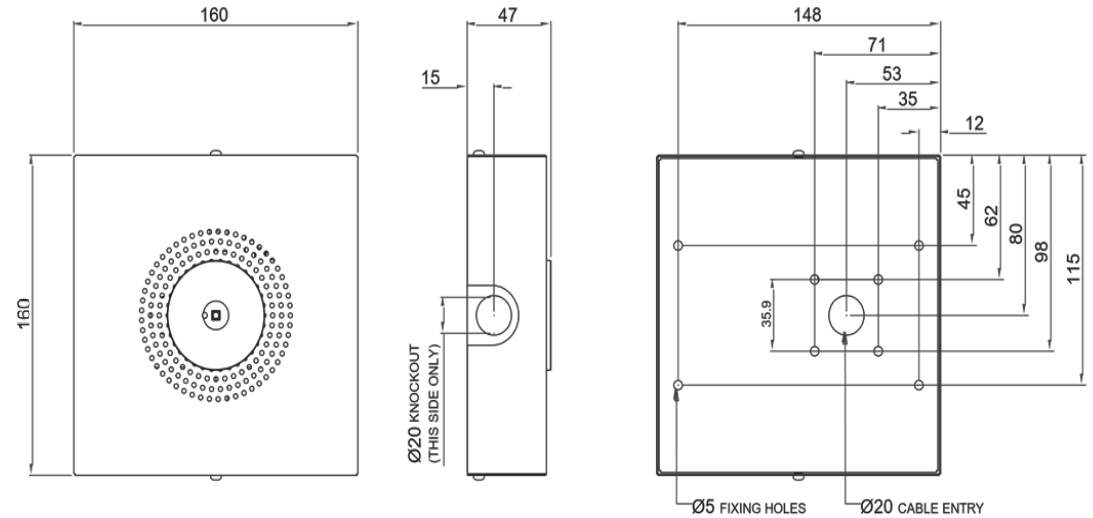

- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

| EXAMPLE PRODUCT CODE |                               | SPR  | E860 | LA | W |
|----------------------|-------------------------------|------|------|----|---|
| <b>FAMILY</b>        | SPRITE                        | SPR  |      |    |   |
| <b>LENS</b>          | AREA                          | A860 |      |    |   |
|                      | CORRIDOR                      | C860 |      |    |   |
|                      | STANDARD                      | E860 |      |    |   |
| <b>CONTROL GEAR</b>  | MAINS/CENTRAL BATTERY*        | LA   |      |    |   |
|                      | MAINS/CENTRAL BATTERY DALI*   | DA   |      |    |   |
|                      | NON-MAINTAINED SELF-CONTAINED | LN   |      |    |   |
|                      | NON-MAINTAINED AUTOTEST       | YS   |      |    |   |
|                      | NON-MAINTAINED DALI           | DS   |      |    |   |
| <b>COLOUR</b>        | GREY                          | G    |      |    |   |
|                      | BLACK                         | K    |      |    |   |
|                      | WHITE                         | W    |      |    |   |


For more information on colours, please go to the **Finishes Page**.

\*For input voltages please refer to our installation leaflets.

# SPRE860



- IP20**
- NM/MM**
- 5** WARRANTY
- KG 0.7**
- 230v**
- DALI**
- 2W**



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

## SPRA860

| MOUNTING HEIGHT | 0.5 LUX |      |      |     | 1 LUX |      |      |     |
|-----------------|---------|------|------|-----|-------|------|------|-----|
|                 | 2.0     | 3.8  | 7.6  | 7.6 | 3.8   | 4.2  | 9.4  | 9.4 |
| 2.5             | 4.3     | 9.4  | 9.4  | 4.3 | 4.8   | 11.0 | 11.0 | 4.8 |
| 3.0             | 4.9     | 10.6 | 10.6 | 4.9 | 5.3   | 12.3 | 12.3 | 5.3 |
| 3.5             | 5.2     | 12.2 | 12.2 | 5.2 | 1.9   | 13.5 | 13.5 | 1.9 |
| 4.0             | 5.6     | 13.4 | 13.4 | 5.6 | 0.7   | 10.6 | 10.6 | 0.7 |
| 4.5             | 5.8     | 14.6 | 14.6 | 5.8 | 0     | 10.1 | 10.1 | 0   |

## SPRC860

| MOUNTING HEIGHT | 0.5 LUX |     |      |      | 1 LUX |     |      |      |
|-----------------|---------|-----|------|------|-------|-----|------|------|
|                 | 2.0     | 2.2 | 6.1  | 15.6 | 6.6   | 1.5 | 4.5  | 13.4 |
| 2.5             | 2.1     | 6.4 | 17.6 | 7.4  | 1.4   | 4.4 | 15.1 | 6.1  |
| 3.0             | 2.1     | 6.3 | 19.4 | 8.1  | 1.2   | 4.2 | 16.5 | 4.0  |
| 3.5             | 1.9     | 6.1 | 21   | 8.5  | 1.2   | 3.9 | 15.4 | 4.2  |
| 4.0             | 1.8     | 6.1 | 22.5 | 5.4  | 1.0   | 3.6 | 15.0 | 4.4  |
| 4.5             | 1.7     | 5.9 | 20.7 | 5.7  | 0.8   | 3.4 | 11.6 | 4.5  |

## SPRE860

| MOUNTING HEIGHT | 0.5 LUX |     |     |     | 1 LUX |      |      |     |
|-----------------|---------|-----|-----|-----|-------|------|------|-----|
|                 | 2.0     | 2.7 | 5.0 | 5.0 | 2.7   | 2.9  | 6.4  | 6.4 |
| 2.5             | 3.1     | 6.2 | 6.2 | 3.1 | 3.3   | 7.5  | 7.5  | 3.3 |
| 3.0             | 3.5     | 7.0 | 7.0 | 3.5 | 3.8   | 8.5  | 8.5  | 3.8 |
| 3.5             | 3.8     | 8.2 | 8.2 | 3.8 | 4.1   | 9.5  | 9.5  | 4.1 |
| 4.0             | 4.1     | 9.0 | 9.0 | 4.1 | 4.3   | 10.4 | 10.4 | 4.3 |
| 4.5             | 4.4     | 9.8 | 9.8 | 4.4 | 4.4   | 11.2 | 11.2 | 4.4 |