

LANTIS BULKHEAD



230v

KG 1.5


3hrs

IK08


IP65

DALI

6 WARRANTY

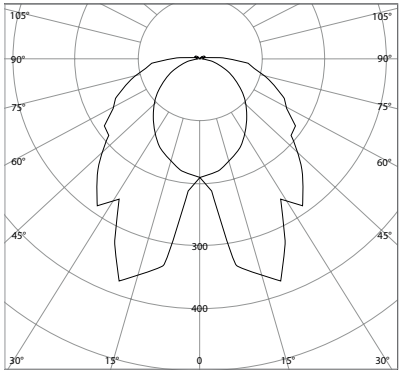

LANT300
LANT300 = 950lm

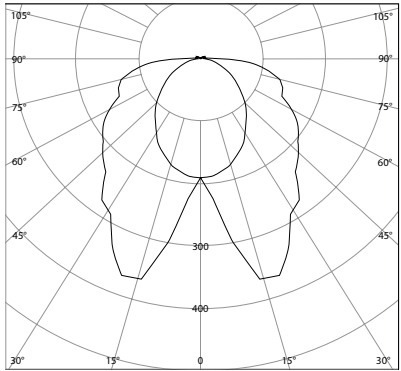

LANT110 & LANT350
LANT110 = 545lm
LANT350 = 1655lm

SPACING TABLE

Mounting Height	0.5 lux				1 lux			
	2.0M	2.5M	3.0M	3.5M	4.0M	4.5M	5.0M	5.5M
2.0M	4.5	10.0	12.0	4.5	3.2	7.9	11.5	4.5
2.5M	4.9	10.8	12.8	4.9	3.5	8.6	12.3	4.8
3.0M	5.3	11.6	13.6	5.3	3.6	9.3	13.0	5.2
3.5M	5.6	12.4	14.4	5.6	3.8	9.8	13.7	5.4
4.0M	5.8	13.4	15.4	5.8	3.9	10.2	14.4	5.6
4.5M	6.0	14.0	16.0	6.0	4.0	10.5	15.0	5.7

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.



EXAMPLE PRODUCT CODE			LANT	110XT
PRODUCT	LANTIS BULKHEAD	LANT		
CONTROL	CENTRAL BATTERY	350LA		
	CENTRAL BATTERY DALI	350DA		
	DALI NON MAINTAINED	300DS		
	NON MAINTAINED	300LN		
	DALI MAINTAINED/ NON-MAINTAINED	110DL		
	SPECTO-XT MAINTAINED/ NON-MAINTAINED	110XT		

LANT300DS Lantis Bulkhead | Dali Non Maintained
Mains mode is not switchable via DALI command on LANT110** self-contained luminaires. DALI is for controlled testing and monitoring only. Please contact technical for more information.
This product contains a light source of energy efficiency class B.



FEATURES & BENEFITS

- Spectro-XT wireless technology removes the need for control cabling, ideal for retro-fit installations
- Clear linear prismatic polycarbonate covers
- Strong and robust body with high impact resistance