



PHILIP PAYNE | TYKE 880

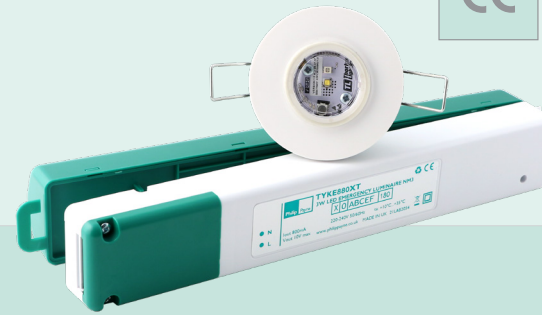

EN60598-1	EN61547
EN60598-2-22	EN61000-3-2
EN55015	PC ABS

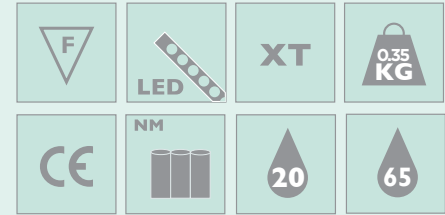

			Wall to Luminaire 	Luminaire to Luminaire 	Lumen Output	Wattage	Drive Current	Dimensions
TYKA880XT	2m Wide escape route with 1 lux on centreline	BS5266	5.3m	12.3m	270	3 Watts	800mA	
	Open Area with 0.5 Lux minimum excluding 0.5m border	BS5266	4.8m	10.6m	270	3 Watts	800mA	
TYKC880XT	2m Wide escape route with 1 lux on centreline	BS5266	10.3m	24.4m	235	3 Watts	800mA	
	Open Area with 0.5 Lux minimum excluding 0.5m border	BS5266	N/A	N/A	235	3 Watts	800mA	
TYKE880XT	2m Wide escape route with 1 lux on centreline	BS5266	4.2m	10.6m	265	3 Watts	800mA	
	Open Area with 0.5 lux minimum excluding 0.5 border	BS5266	4.3m	9.6m	265	3 Watts	800mA	
TYKP880XT	2m Wide escape route with 1 lux on centreline	BS5266	4.2m	10.6m	265	3 Watts	800mA	
	Open Area with 0.5 lux minimum excluding 0.5 border	BS5266	4.3m	9.6m	265	3 Watts	800mA	

Head assembly IP rated beneath ceiling *