

CELO RECESSED




230v



IP40



WARRANTY

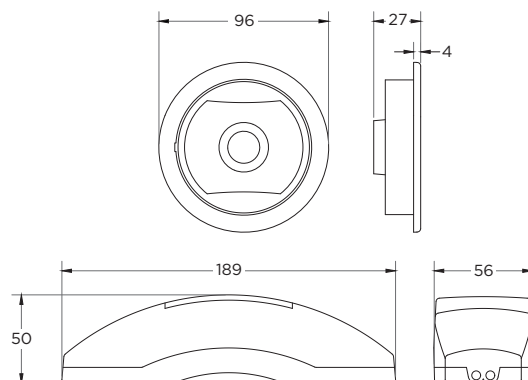

SPACING TABLE

Lens	Mounting Height	0.5 lux				1 lux			
		Diagram 1	Diagram 2	Diagram 3	Diagram 4	Diagram 5	Diagram 6	Diagram 7	Diagram 8
AREA	2.0M	3.6	7.4	7.4	3.6	3.9	8.7	8.7	3.9
	2.5M	4.2	8.8	8.8	4.2	4.5	10.2	10.2	4.5
	3.0M	4.7	10.4	10.4	4.7	5.1	11.6	11.6	5.1
	3.5M	5.1	11.6	11.6	5.1	4.8	12.8	12.8	4.8
	4.0M	5.6	12.6	12.6	5.6	0.1	10.8	10.8	0.1
	4.5M	5.9	14.0	14.0	5.9	0.0	8.7	8.7	0.0


CORRIDOR	2.0M	2.8	6.0	6.0	2.8	1.8	4.9	11.4	4.8
	2.5M	2.9	6.2	6.2	2.9	1.9	5.2	13.0	5.5
	3.0M	3.0	6.4	6.4	3.0	2.1	5.4	14.4	6.0
	3.5M	3.1	7.2	7.2	3.1	2.1	5.5	15.6	6.5
	4.0M	3.2	7.4	7.4	3.2	2.1	5.8	16.7	6.8
	4.5M	3.2	7.4	7.4	3.2	2.0	5.9	17.6	6.7

SPOT	2.0M	2.5	5.6	5.6	2.5	2.2	5.4	5.4	2.2
	2.5M	2.8	6.2	6.2	2.8	2.6	6.1	6.1	2.6
	3.0M	3.0	6.6	6.6	3.0	2.9	6.7	6.7	2.9
	3.5M	3.2	7.2	7.2	3.2	3.2	7.5	7.5	3.2
	4.0M	3.5	7.6	7.6	3.5	3.4	8.0	8.0	3.4
	4.5M	3.6	8.2	8.2	3.6	3.6	8.6	8.6	3.6

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.

EXAMPLE PRODUCT CODE			CELO	R	C	XT	W
PRODUCT	CELO	CELO					
MOUNT	RECESSED	R					
LENS	AREA	A					
	CORRIDOR	C					
	SPOT	S					
CONTROL	SPECTO-XT NON-MAINTAINED	XT					
COLOUR	WHITE	W					
	BLACK	K					

CELORCXTW CELO | Recessed | Corridor Lens | Specto-XT Non-Maintained | White finish

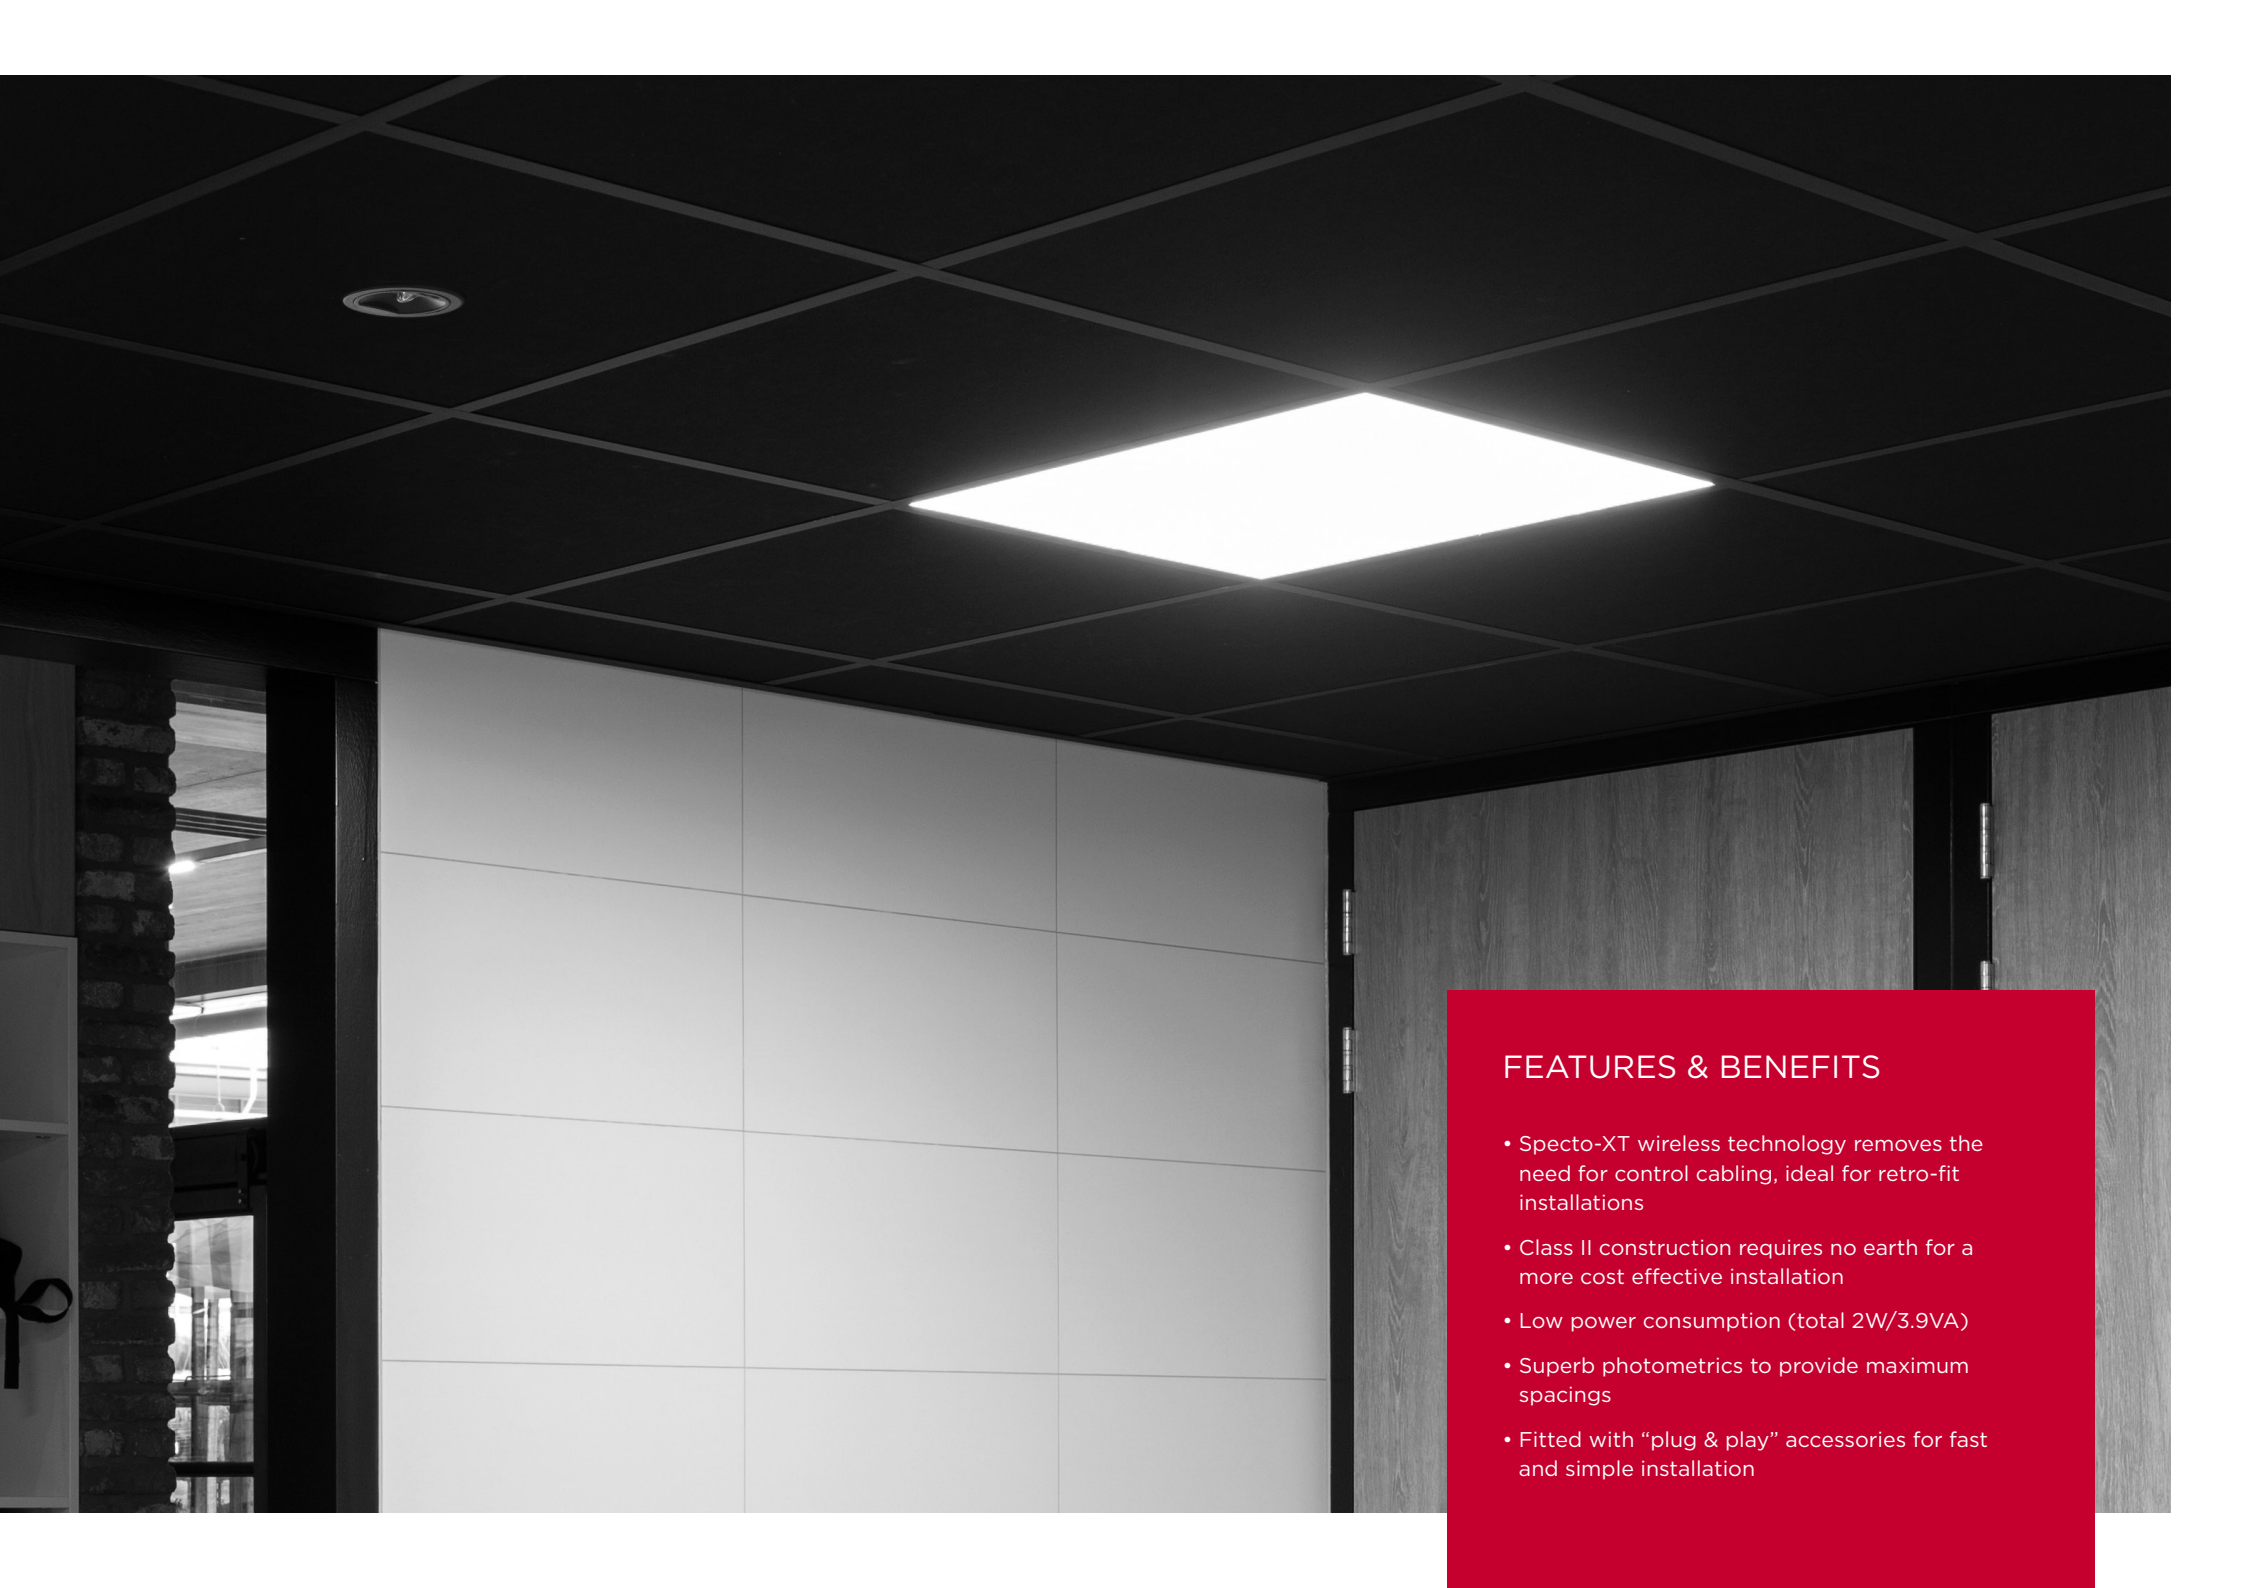

FEATURES & BENEFITS

- Specto-XT wireless technology removes the need for control cabling, ideal for retro-fit installations
- Class II construction requires no earth for a more cost effective installation
- Low power consumption (total 2W/3.9VA)
- Superb photometrics to provide maximum spacings
- Fitted with “plug & play” accessories for fast and simple installation