







# EXTUBE SURFACE

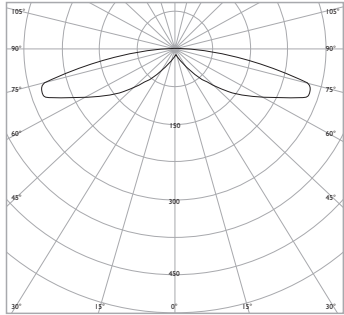

**LUMINAIRE LUMEN OUTPUT**  
 11W = 875lm - Area Distribution  
 21W = 1495lm - Area Distribution

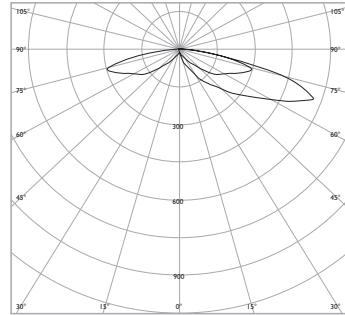

**LUMINAIRE LUMEN OUTPUT**  
 5W = 450lm - Path Distribution  
 11W = 780lm - Path Distribution

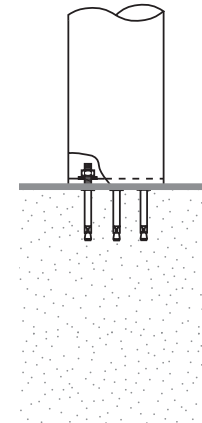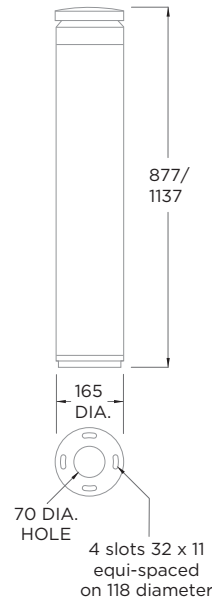

### SPACING TABLE


| AREA             | PATHWAY          |
|------------------|------------------|
| 8m between posts | 9m between posts |
| 20 lux (average) | 20 lux (average) |
| 0.32 Uniformity  | 0.26 Uniformity  |

- 230v
- 9.0
- 3hrs
- 4k
- IK10
- DALI
- IP66
- 6 WARRANTY

| EXAMPLE PRODUCT CODE |                      | EXT  | S | 887 | A11 | XT | K |
|----------------------|----------------------|------|---|-----|-----|----|---|
| <b>PRODUCT</b>       | EXTUBE               | EXT  |   |     |     |    |   |
| <b>MOUNT</b>         | SURFACE MOUNTED      | S    |   |     |     |    |   |
| <b>HEIGHT</b>        | 887mm                | 887  |   |     |     |    |   |
|                      | 1137mm               | 1137 |   |     |     |    |   |
| <b>LED</b>           | AREA 11W / PATH 5W   | A11  |   |     |     |    |   |
|                      | AREA 21W / PATH 11W  | A21  |   |     |     |    |   |
| <b>CONTROLS</b>      | MAINS ONLY           | LA   |   |     |     |    |   |
|                      | MAINTAINED           | LM   |   |     |     |    |   |
|                      | DALI MAINTAINED      | DL   |   |     |     |    |   |
|                      | SPECTO-XT MAINTAINED | XT   |   |     |     |    |   |
| <b>COLOUR</b>        | BLACK                | K    |   |     |     |    |   |


**EXTS887A11XTK** Extube | Surface Mounted | 887mm Height | Area 11W/Path 5W | Specto-XT | Black Finish  
 This product contains a light source of energy efficiency class C.

| ACCESSORIES    |                                       |          |
|----------------|---------------------------------------|----------|
| <b>PRODUCT</b> | EXTUBE, SURFACE MOUNTING - J BOLT KIT | EXTSJKIT |
|                | EXTUBE, SURFACE MOUNTING - ROOT KIT   | EXTSRKIT |




## ACCESSORIES

J BOLT

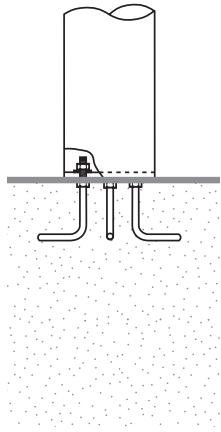

ROOT KIT

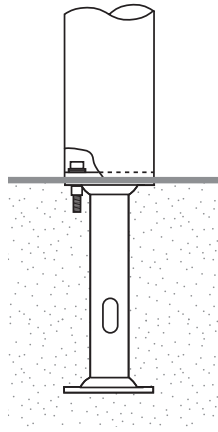

## FEATURES & BENEFITS

- High performance optics to give greater spacings maintaining good uniformity
- Extruded aluminium body with die-cast aluminium head unit
- Superb photometric performance for wide spacings and excellent uniformity
- Less than 2% upward light
- On-board selector switch provides on-site adjustment between area and pathway distributions
- Surface mounted options are bump resistant
- Allowing post to pivot up to 10° from the vertical position during impact for bump resistance
- Large access door makes installation simple
- Integral emergency and Specto-XT wireless emergency options
- Extremely long life, up to 100,000 hours

