


GO! CEILING

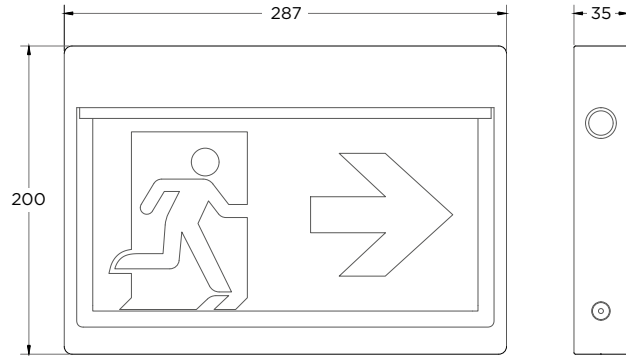

- 230v
- 3hrs
- Icon: Running figure with arrow
- DALI
- CE
- 1.16
- IP40
- 25m
- 5 WARRANTY

EXAMPLE PRODUCT CODE		GO	C	XT	W	IS	D	U
PRODUCT	GO!	GO						
MOUNT	CEILING MOUNTED	C						
CONTROL	DALI MAINTAINED	DL						
	SPECTO-XT MAINTAINED	XT						
COLOUR	WHITE	W						
	BLACK	K						
LEGEND TYPE	ISO 7010	IS						
	BS 5499	BS						
	EC 92/58	EC						
	NO LEGEND	NL						
LEGEND SIDE	SINGLE SIDED	S						
	DOUBLE SIDED	D						
DIRECTION	UP	U						
	DOWN	D						
	RIGHT	R						
	LEFT	L						

GOCXTWISDU GO! Ceiling | Specto-XT Maintained | White finish | ISO 7010 | Double Sided Arrow Up

ACCESSORIES		
PRODUCT	PROTECTIVE WIRE GUARD	GOCWG

ACCESSORIES



FEATURES & BENEFITS

- Specto-XT wireless technology removes the need for control cabling, ideal for retro-fit installations
- Class II construction requires no earth for a more cost effective installation
- Hinged battery compartment provides fast battery replacements
- Low power consumption (total 2W/3.9VA)
- Polycarbonate body and tool-less fix legends
- Tool-less second fix body for fast installations

