


MF100



- IP66**
- IK10++**
- 6**
WARRANTY
- KG**
1.5
- 230v**
- DALI**
-
- NM/MM**

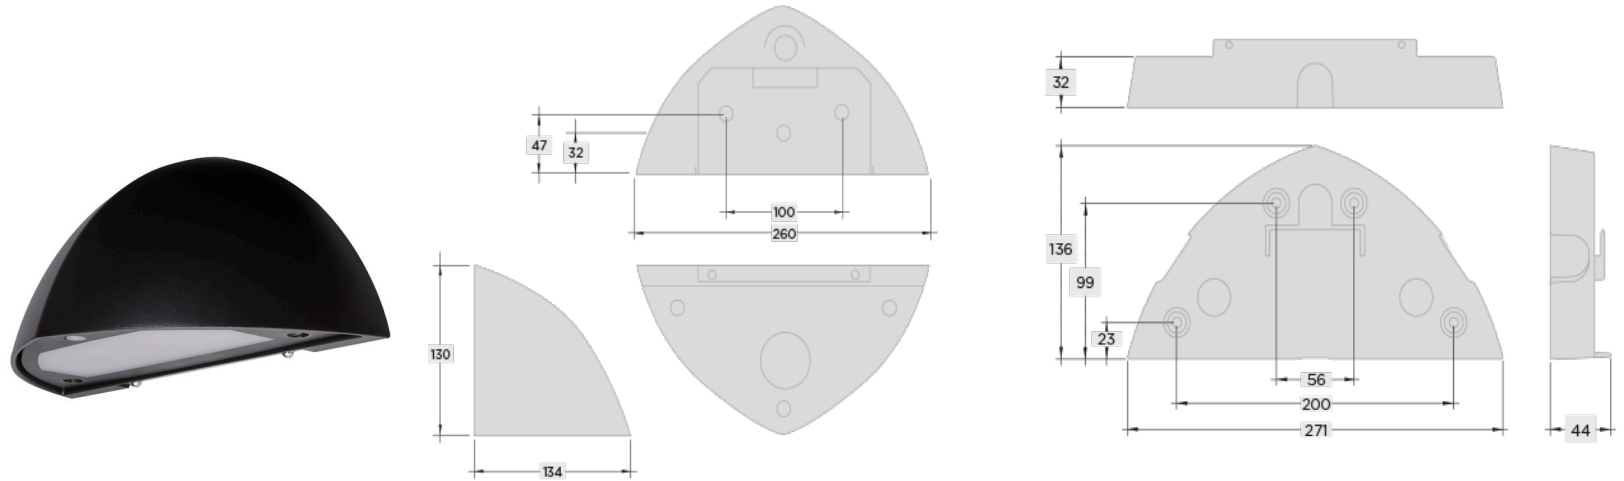

- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

| EXAMPLE PRODUCT CODE | | MF | 100 | 06 | LM | W |
|---------------------------|------------------------------|-----|-----|----|----|---|
| FAMILY | MF100 | MF | | | | |
| PRODUCT | MF100 | 100 | | | | |
| WATTAGES | 6W | 06 | | | | |
| CONTROL GEAR | MAINS/CENTRAL BATTERY** | LA | | | | |
| | MAINS/CENTRAL BATTERY DALI** | DA | | | | |
| | MAINTAINED SELF-CONTAINED | LM | | | | |
| | MAINTAINED AUTOTEST | YL | | | | |
| | MAINTAINED DALI* | DL | | | | |
| | MAINTAINED SPECTO-XT | XT | | | | |
| COLOUR | GREY | G | | | | |
| | BLACK | K | | | | |
| | PENNY BRONZE | V | | | | |
| | WHITE | W | | | | |
| WALL BRACKET CODE: | MF100WBK | | | | | |

Example Code MF10006LMW MF100 | 6W | Maintained Self-Contained | White

* Mains mode is not switchable via DALI command on 6W self-contained luminaires. DALI is for controlled testing and monitoring only. Please contact technical for more information.

For input voltages please refer to our installation leaflets. For more information on colours, please go to the **Finishes Page.

This product contains a light source of energy efficiency class B.