



PRO EXIT

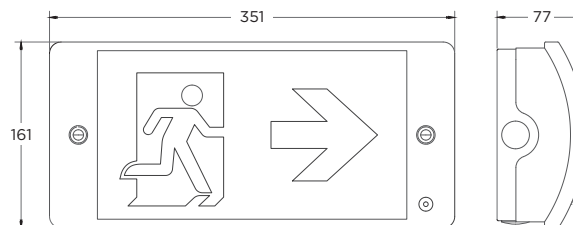

EXAMPLE PRODUCT CODE		PROEX	S	XT	W	IS	SU
PRODUCT	PRO EXIT	PROEX					
MOUNT	SURFACE	S					
CONTROL	DALI MAINTAINED	DL					
	MAINTAINED SELF-CONTAINED	LM					
	MAINS/CENTRAL BATTERY DALI**	DA					
	MAINS/CENTRAL BATTERY**	LA					
	SPECTO-XT MAINTAINED	XT					
COLOUR	WHITE	W					
LEGEND TYPE	ISO 7010	IS					
	BS 5499	BS					
	EC 92/58	EC					
	NO LEGEND	NL					
DIRECTION	SINGLE UP	SU					
	SINGLE DOWN	SD					
	SINGLE RIGHT	SR					
	SINGLE LEFT	SL					

PROEXSXTWISSU PRO Exit | Surface Mounted | Specto-XT Maintained | White finish | ISO 7010 | Single Sided Arrow Up

**For input voltages please refer to our installation leaflets.

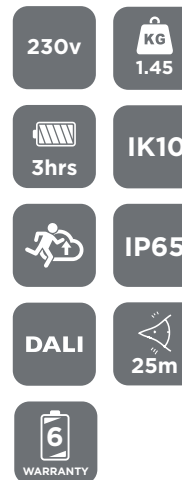

ACCESSORIES

PRODUCT	PROTECTIVE WIRE GUARD	PROWG
---------	-----------------------	-------

ACCESSORIES



FEATURES & BENEFITS

- Specto-XT wireless technology removes the need for control cabling, ideal for retro-fit installations
- Class II construction requires no earth for a more cost effective installation
- Strong and robust body with high impact resistance

