





EXTUBE SURFACE

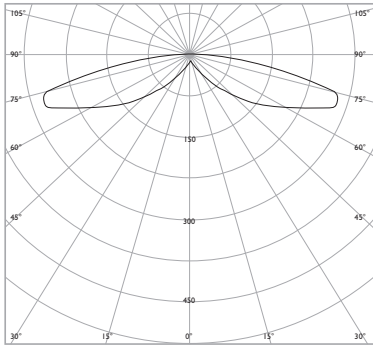

LUMINAIRE LUMEN OUTPUT
 11W = 875lm - Area Distribution
 21W = 1495lm - Area Distribution

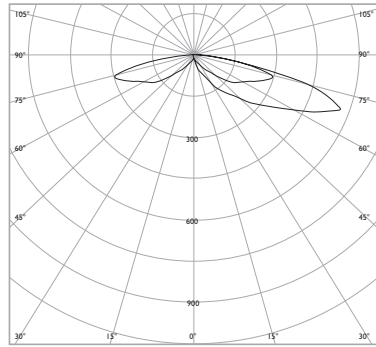

LUMINAIRE LUMEN OUTPUT
 5W = 450lm - Path Distribution
 11W = 780lm - Path Distribution

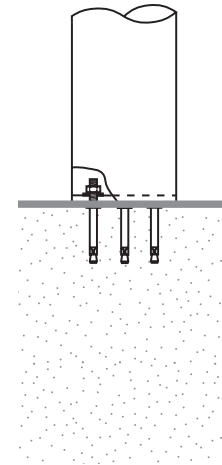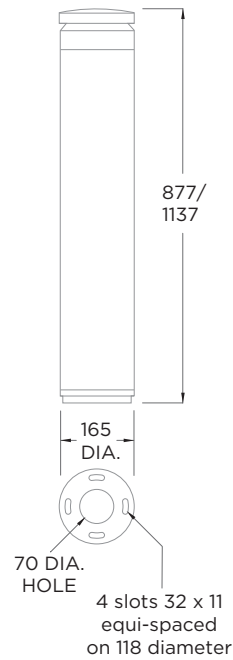

- 230v
- 3hrs
- Icon of a person walking
- DALI
- CE
- 9.0
- 4k
- IK10
- IP66
- 5 WARRANTY

SPACING TABLE

AREA	PATHWAY
8m between posts	9m between posts
20 lux (average)	20 lux (average)
0.32 Uniformity	0.26 Uniformity


EXAMPLE PRODUCT CODE		EXT	S	887	A11	XT	K
PRODUCT	EXTUBE	EXT					
MOUNT	SURFACE MOUNTED	S					
HEIGHT	887mm	887					
	1137mm	1137					
LED	AREA 11W / PATH 5W	A11					
	AREA 21W / PATH 11W	A21					
CONTROLS	MAINS ONLY	LA					
	MAINTAINED	LM					
	DALI MAINTAINED	DL					
	SPECTO-XT MAINTAINED	XT					
COLOUR	BLACK	K					

EXTS887A11XTK Extube | Surface Mounted | 887mm Height | Area 11W/Path 5W | Specto-XT | Black Finish


ACCESSORIES		
PRODUCT	EXTUBE, SURFACE MOUNTING - J BOLT KIT	EXTSJKIT
	EXTUBE, SURFACE MOUNTING - ROOT KIT	EXTSRKIT

ACCESSORIES

J BOLT

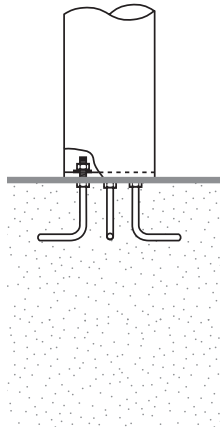

ROOT KIT

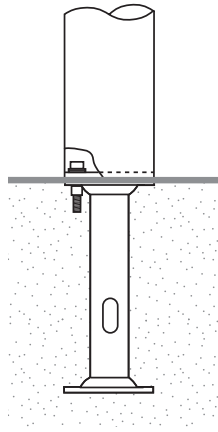

FEATURES & BENEFITS

- High performance optics to give greater spacings maintaining good uniformity
- Extruded aluminium body with die-cast aluminium head unit
- Superb photometric performance for wide spacings and excellent uniformity
- Less than 2% upward light
- On-board selector switch provides on-site adjustment between area and pathway distributions
- Surface mounted options are bump resistant
- Allowing post to pivot up to 10° from the vertical position during impact for bump resistance
- Large access door makes installation simple
- Integral emergency and Specto-XT wireless emergency options
- Extremely long life, up to 100,000 hours

