

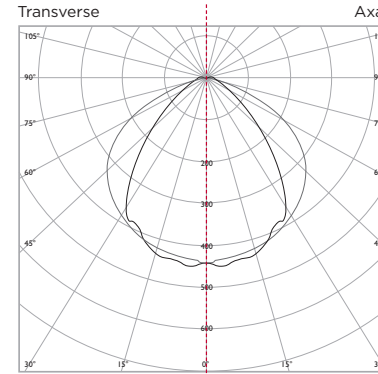



# ALTUM

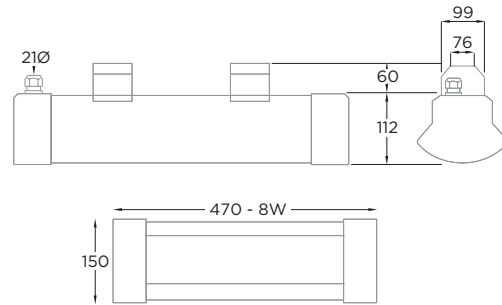

- 230v**
- IP64**
- 3hrs**
- 4k**
- IK10**
- DALI**
- 5 WARRANTY**
- 3.2 KG**

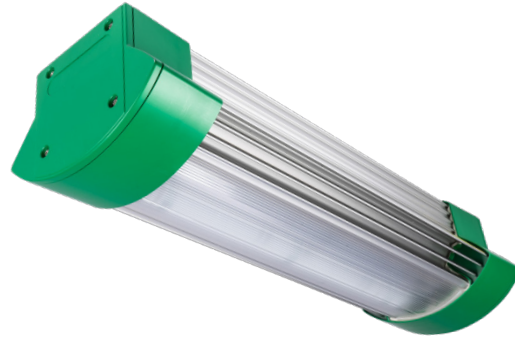

**LUMINAIRE LUMEN OUTPUT BROAD**  
8W = 1035lm

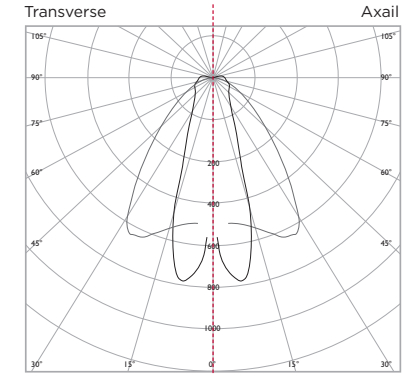

**LUMINAIRE LUMEN OUTPUT NARROW**  
8W = 1025lm


### SPACING TABLE

		0.5 lux				1 lux			
Lens	Mounting Height	A	B	D	E	A	B	D	E
<b>BROAD</b>	6.0M	6.7	17.4	16.4	6.7	9.3	22.8	16.5	6.8
	8.0M	7.7	20.6	18.8	7.7	10	25.7	18.8	7.8
	10.0M	8.5	23.4	21	8.5	10.2	27.7	20.9	8.4
	12.0M	9.2	26.2	22.8	9.2	9.9	28.7	22.6	8.9
<b>NARROW</b>	6.0M	6.2	17.6	17.2	6.2	8.1	19.6	16.4	6.1
	8.0M	6.8	20.4	18.6	6.8	9.1	22.4	17.2	6.3
	10.0M	7.2	23	19.6	7.2	9.9	24.7	17.7	6.4
	12.0M	7.5	25	20.6	7.5	10.4	26.6	18.1	6.4



EXAMPLE PRODUCT CODE		ALT	S	N1025	XT	G
<b>PRODUCT</b>	ALTUM	ALT				
<b>MOUNT</b>	SURFACE	S				
<b>LENS</b>	<b>NARROW DISTRIBUTION</b> 1025 LUMEN OUTPUT	N1025				
	<b>BROAD DISTRIBUTION,</b> 1035 LUMEN OUTPUT	B1035				
<b>CONTROL</b>	MAINS ONLY	LA				
	DALI NON-MAINTAINED	DS				
	SPECTO-XT NON-MAINTAINED	XT				
<b>COLOUR</b>	GREY	G				

ALTSN1025XTG Altum | Surface Mount | Narrow Distribution 1025 Lumen Output | Specto XT | Grey Finish

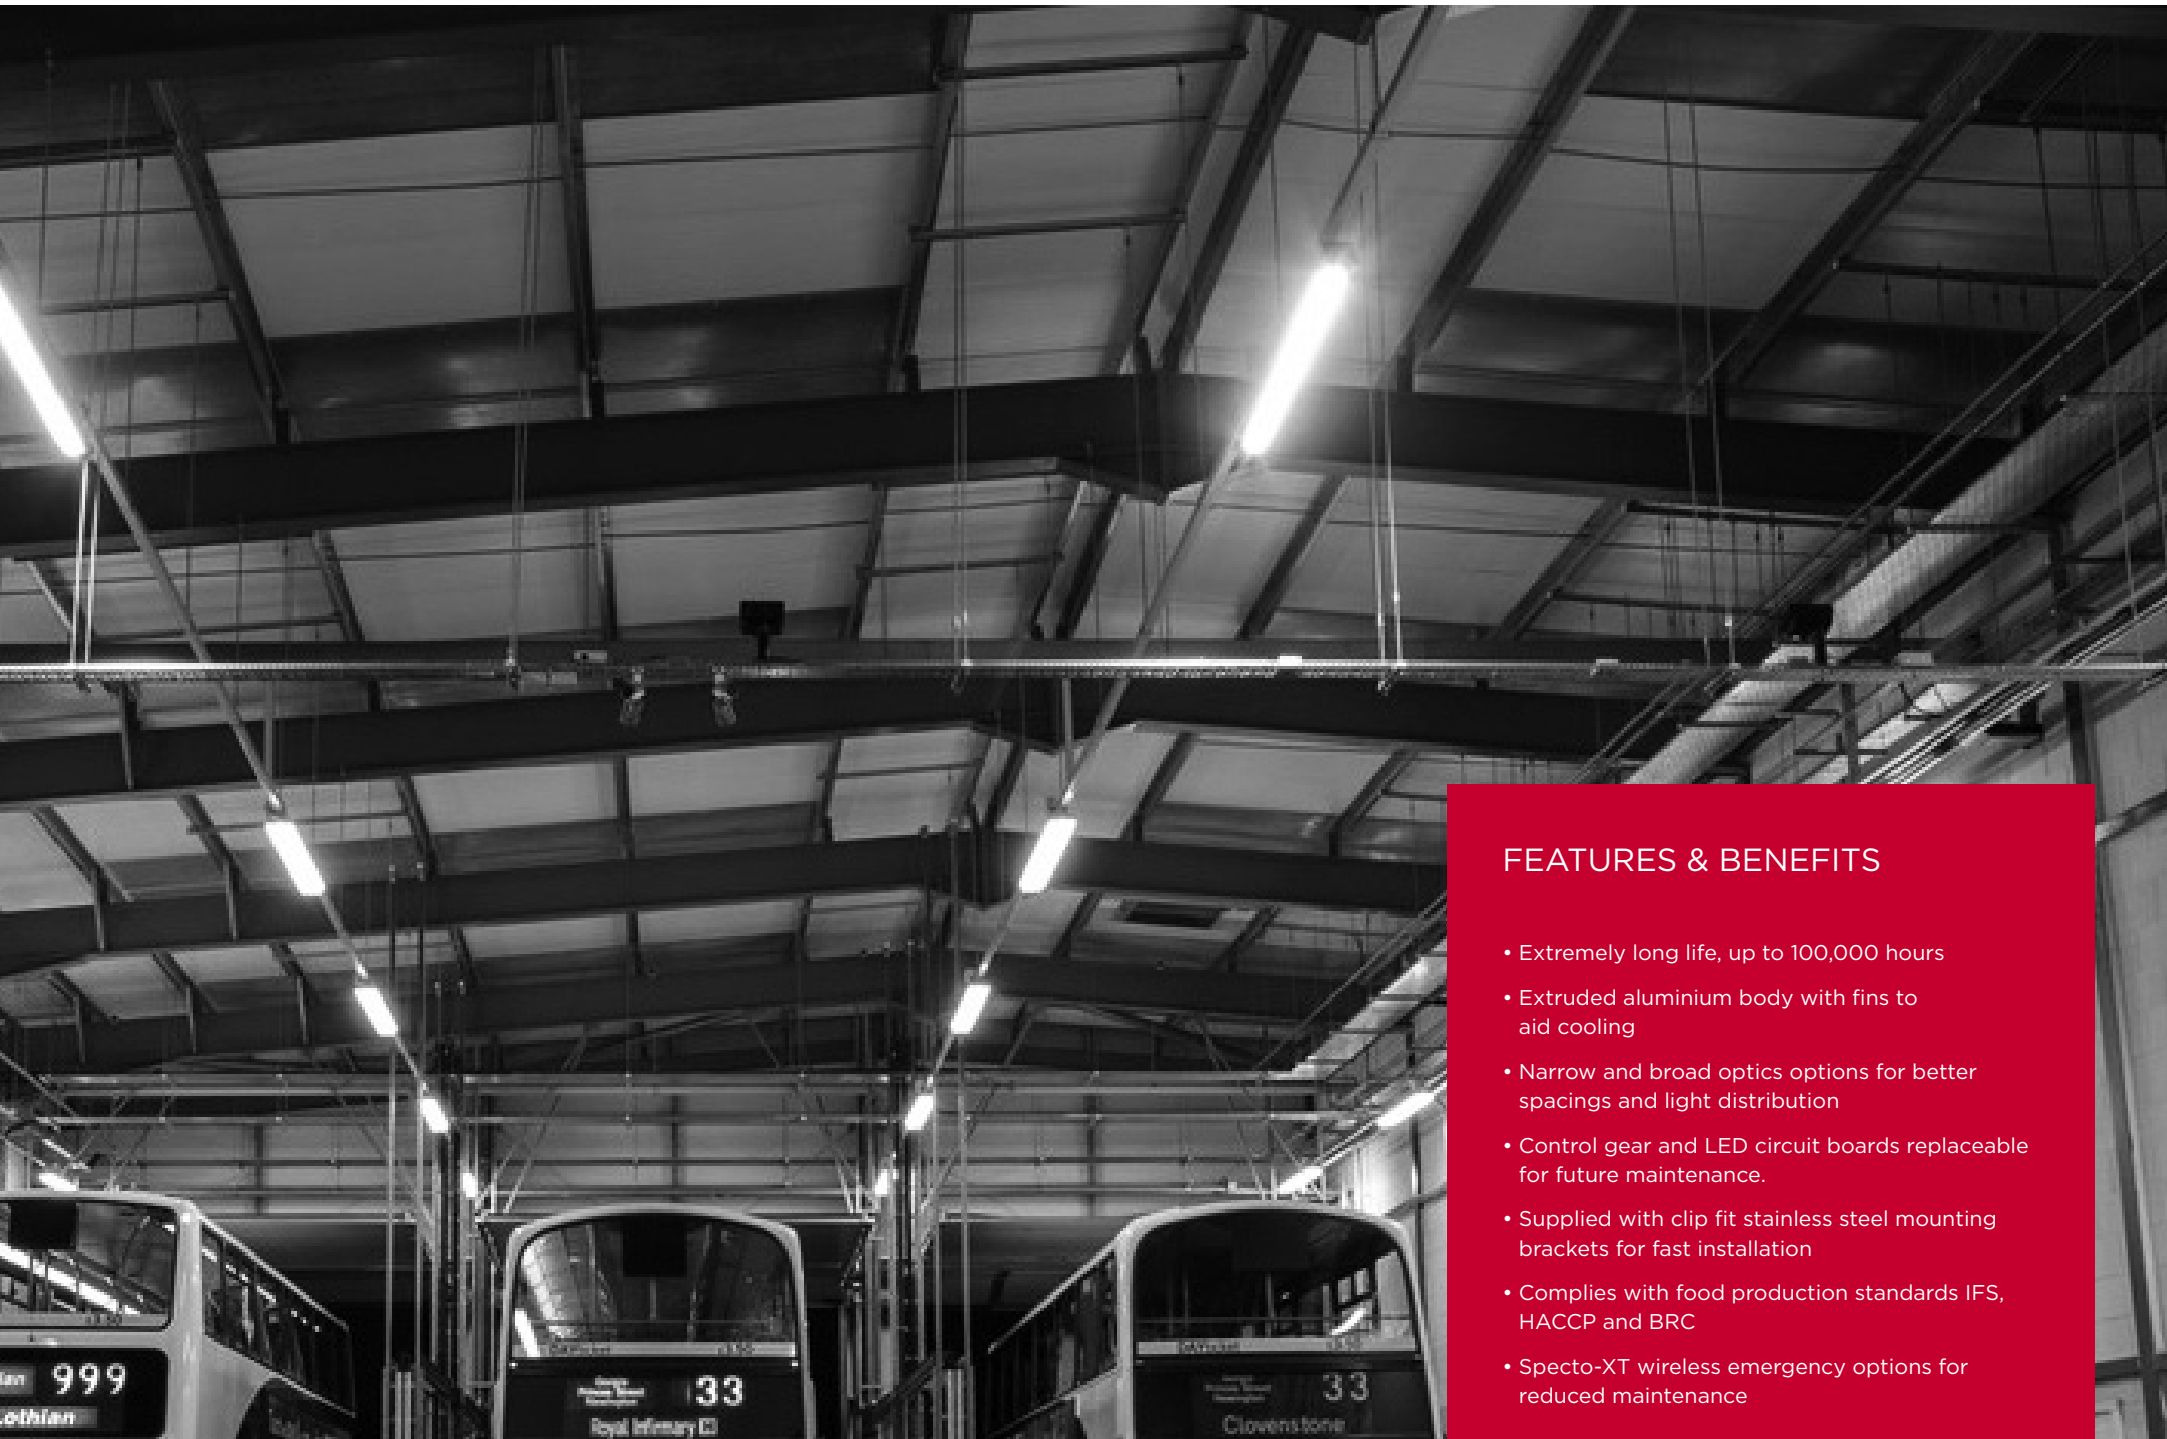

## FEATURES & BENEFITS

- Extremely long life, up to 100,000 hours
- Extruded aluminium body with fins to aid cooling
- Narrow and broad optics options for better spacings and light distribution
- Control gear and LED circuit boards replaceable for future maintenance.
- Supplied with clip fit stainless steel mounting brackets for fast installation
- Complies with food production standards IFS, HACCP and BRC
- Spectro-XT wireless emergency options for reduced maintenance