

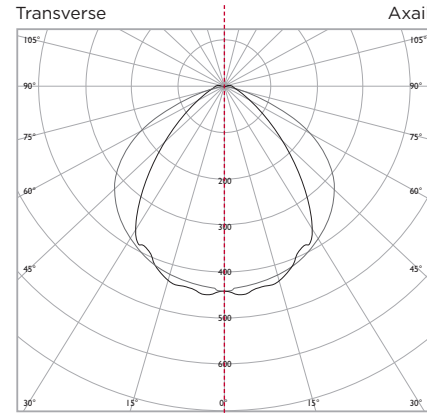


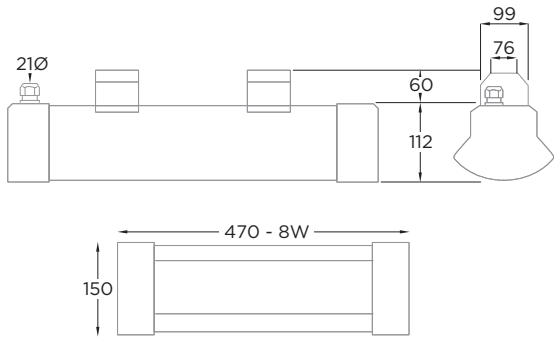


ALTUM

ALTUM

- 230v
- 3hrs
- DALI
- CE
- 3.2
- IP64
- 4k
- IK10
- 5 WARRANTY

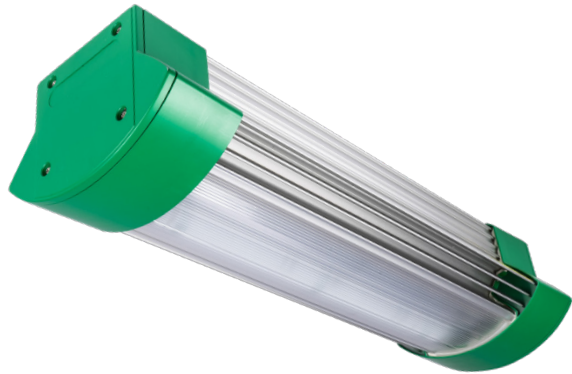

LUMINAIRE LUMEN OUTPUT BROAD
8W = 1035lm

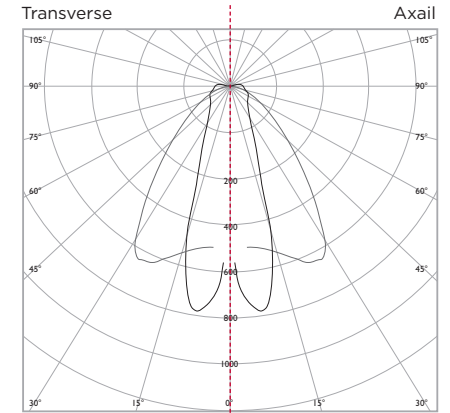

LUMINAIRE LUMEN OUTPUT NARROW
8W = 1025lm

SPACING TABLE

		0.5 lux				1 lux			
Lens	Mounting Height	A	B	D	E	A	B	D	E
BROAD	6.0M	6.7	17.4	16.4	6.7	9.3	22.8	16.5	6.8
	8.0M	7.7	20.6	18.8	7.7	10	25.7	18.8	7.8
	10.0M	8.5	23.4	21	8.5	10.2	27.7	20.9	8.4
	12.0M	9.2	26.2	22.8	9.2	9.9	28.7	22.6	8.9
NARROW	6.0M	6.2	17.6	17.2	6.2	8.1	19.6	16.4	6.1
	8.0M	6.8	20.4	18.6	6.8	9.1	22.4	17.2	6.3
	10.0M	7.2	23	19.6	7.2	9.9	24.7	17.7	6.4
	12.0M	7.5	25	20.6	7.5	10.4	26.6	18.1	6.4

EXAMPLE PRODUCT CODE	ALT	S	N1025	XT	G
PRODUCT	ALTUM	ALT			
MOUNT	SURFACE	S			
LENS	NARROW DISTRIBUTION 1025 LUMEN OUTPUT	N1025			
	BROAD DISTRIBUTION, 1035 LUMEN OUTPUT	B1035			
CONTROL	MAINS ONLY	LA			
	DALI NON-MAINTAINED	DS			
	SPECTO-XT NON-MAINTAINED	XT			
COLOUR	GREY	G			



FEATURES & BENEFITS

- Extremely long life, up to 100,000 hours
- Extruded aluminium body with fins to aid cooling
- Narrow and broad optics options for better spacings and light distribution
- Control gear and LED circuit boards replaceable for future maintenance.
- Supplied with clip fit stainless steel mounting brackets for fast installation
- Complies with food production standards IFS, HACCP and BRC
- Specto-XT wireless emergency options for reduced maintenance