



CELO RECESSED



- 230v
- 0.48
- 3hrs
- IP40
- WARRANTY 6

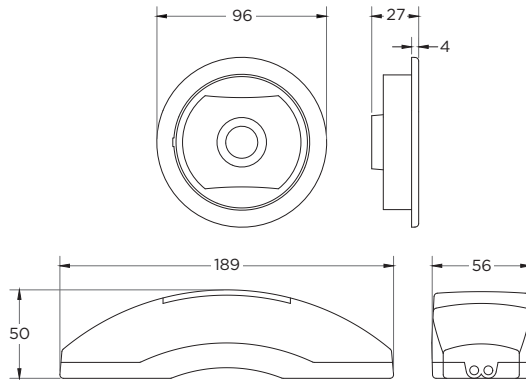

SPACING TABLE




Lens	Mounting Height	0.5 lux				1 lux			
		Area	Corridor	Spot	Area	Corridor	Spot	Area	
AREA	2.0M	3.6	7.4	7.4	3.6	4.1	9.1	9.1	4.1
	2.5M	4.2	8.8	8.8	4.2	4.7	10.6	10.6	4.7
	3.0M	4.7	10.4	10.4	4.7	5.3	12.0	12.0	5.3
	3.5M	5.1	11.6	11.6	5.1	5.2	13.3	13.3	5.2
	4.0M	5.6	12.6	12.6	5.6	2.2	14.3	14.3	2.2
4.5M	5.9	14.0	14.0	5.9	0.0	10.3	10.3	0.0	

CORRIDOR	2.0M	2.8	6.0	6.0	2.8	2.0	5.2	12.2	5.2
	2.5M	2.9	6.2	6.2	2.9	2.1	5.5	13.9	5.9
	3.0M	3.0	6.4	6.4	3.0	2.2	5.7	15.3	6.4
	3.5M	3.1	7.2	7.2	3.1	2.2	5.9	16.6	6.9
	4.0M	3.2	7.4	7.4	3.2	2.3	6.1	17.8	7.3
	4.5M	3.2	7.4	7.4	3.2	2.3	6.3	18.8	7.5

SPOT	2.0M	2.5	5.6	5.6	2.5	2.4	5.7	5.7	2.4
	2.5M	2.8	6.2	6.2	2.8	2.7	6.5	6.5	2.7
	3.0M	3.0	6.6	6.6	3.0	3.0	7.1	7.1	3.0
	3.5M	3.2	7.2	7.2	3.2	3.3	7.8	7.8	3.3
	4.0M	3.5	7.6	7.6	3.5	3.6	8.4	8.4	3.6
	4.5M	3.6	8.2	8.2	3.6	3.7	9.0	9.0	3.7

EXAMPLE PRODUCT CODE		CELO	R	C	XT	W
PRODUCT	CELO	CELO				
MOUNT	RECESSED	R				
LENS	AREA	A				
	CORRIDOR	C				
	SPOT	S				
CONTROL	SPECTO-XT NON-MAINTAINED	XT				
COLOUR	WHITE	W				
	BLACK	K				

CELORCXTW CELO | Recessed | Corridor Lens | Specto-XT Non-Maintained | White finish

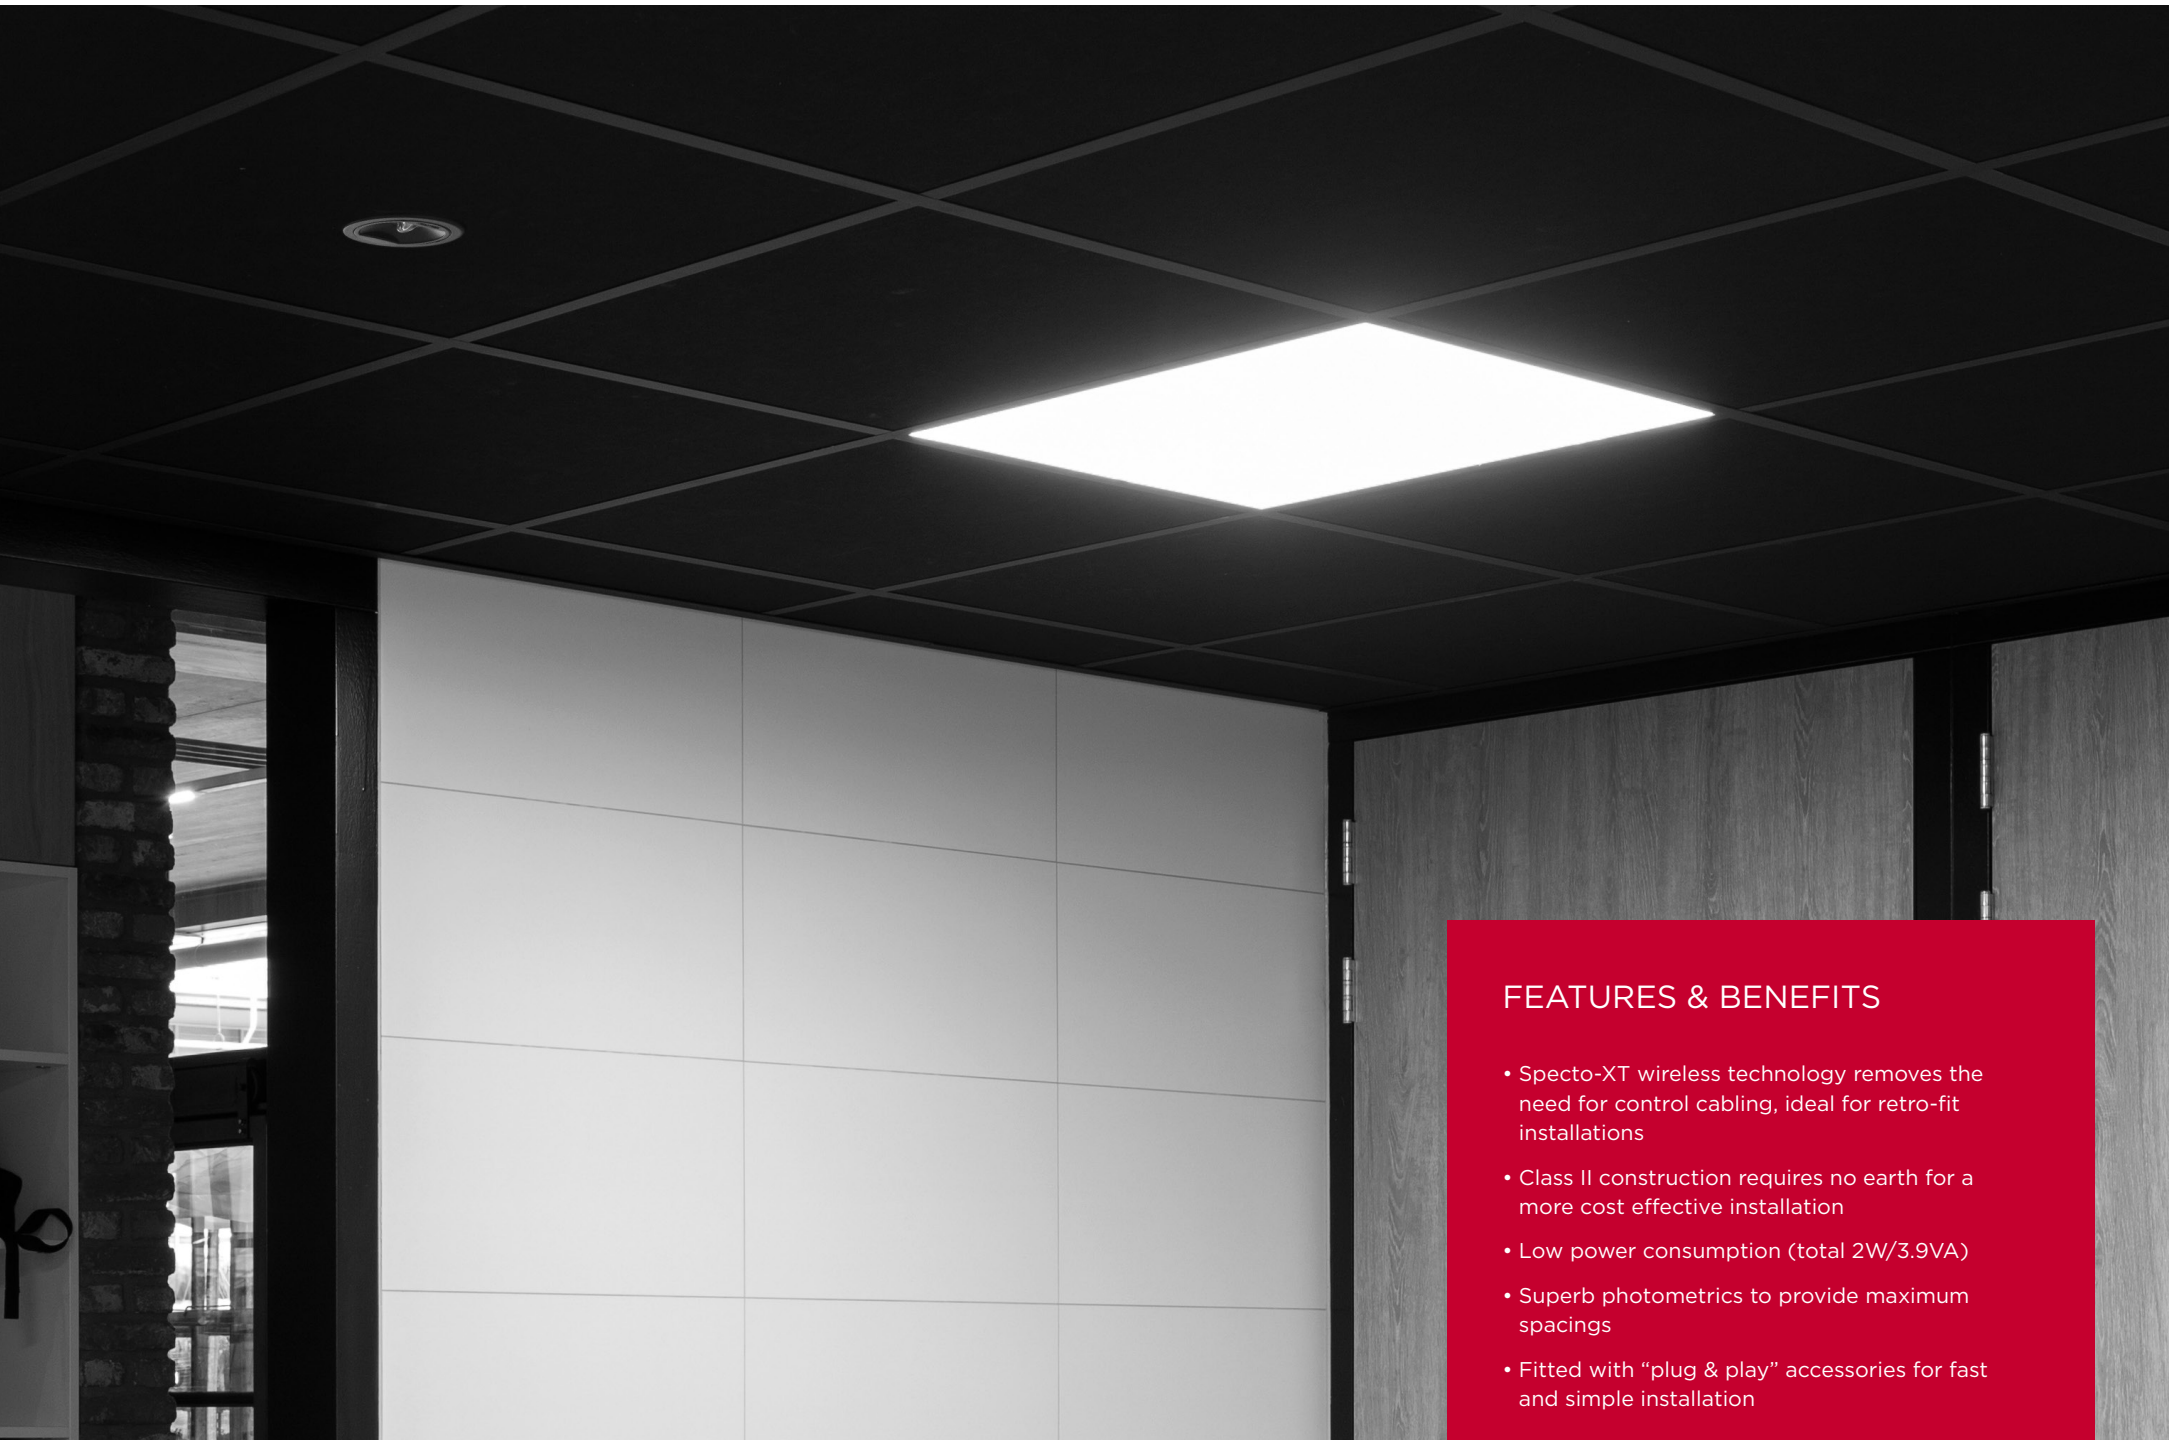

FEATURES & BENEFITS

- Specto-XT wireless technology removes the need for control cabling, ideal for retro-fit installations
- Class II construction requires no earth for a more cost effective installation
- Low power consumption (total 2W/3.9VA)
- Superb photometrics to provide maximum spacings
- Fitted with “plug & play” accessories for fast and simple installation