


CELO WALL



- IP20**
- 6** WARRANTY
- 230v** **DALI**
- 2W** **NM**
- 1.5** KG

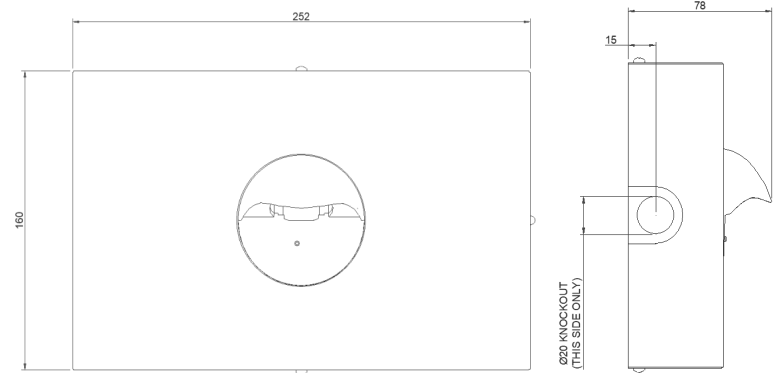

SPACING TABLE


MOUNTING HEIGHT	0.5 LUX				1 LUX			
	Diagram 1	Diagram 2	Diagram 3	Diagram 4	Diagram 5	Diagram 6	Diagram 7	Diagram 8
2.0	3.9	7.8	14.4	6.9	3.3	6.6	13.9	6.3
2.25	4.1	8.4	16.8	7.4	3.6	7.3	15.2	6.8
2.5	4.3	9	18	7.8	3.9	7.9	16.4	7.3
2.75	4.5	9.8	19.4	8.1	4.2	8.4	10.6	0
3.0	4.7	10.4	20.6	8.3	0	0.7	10.3	0



EXAMPLE PRODUCT CODE	CELOW		C	XT	W
FAMILY	CELO WALL	CELOW			
LENS	CORRIDOR	C			
CONTROL	SPECTO-XT NON-MAINTAINED	XT			
	DALI NON-MAINTAINED	DS			
	WHITE	W			

CELOWCXTW

CELO Wall | Corridor Lens | Specto-XT Non-Maintained | White Finish

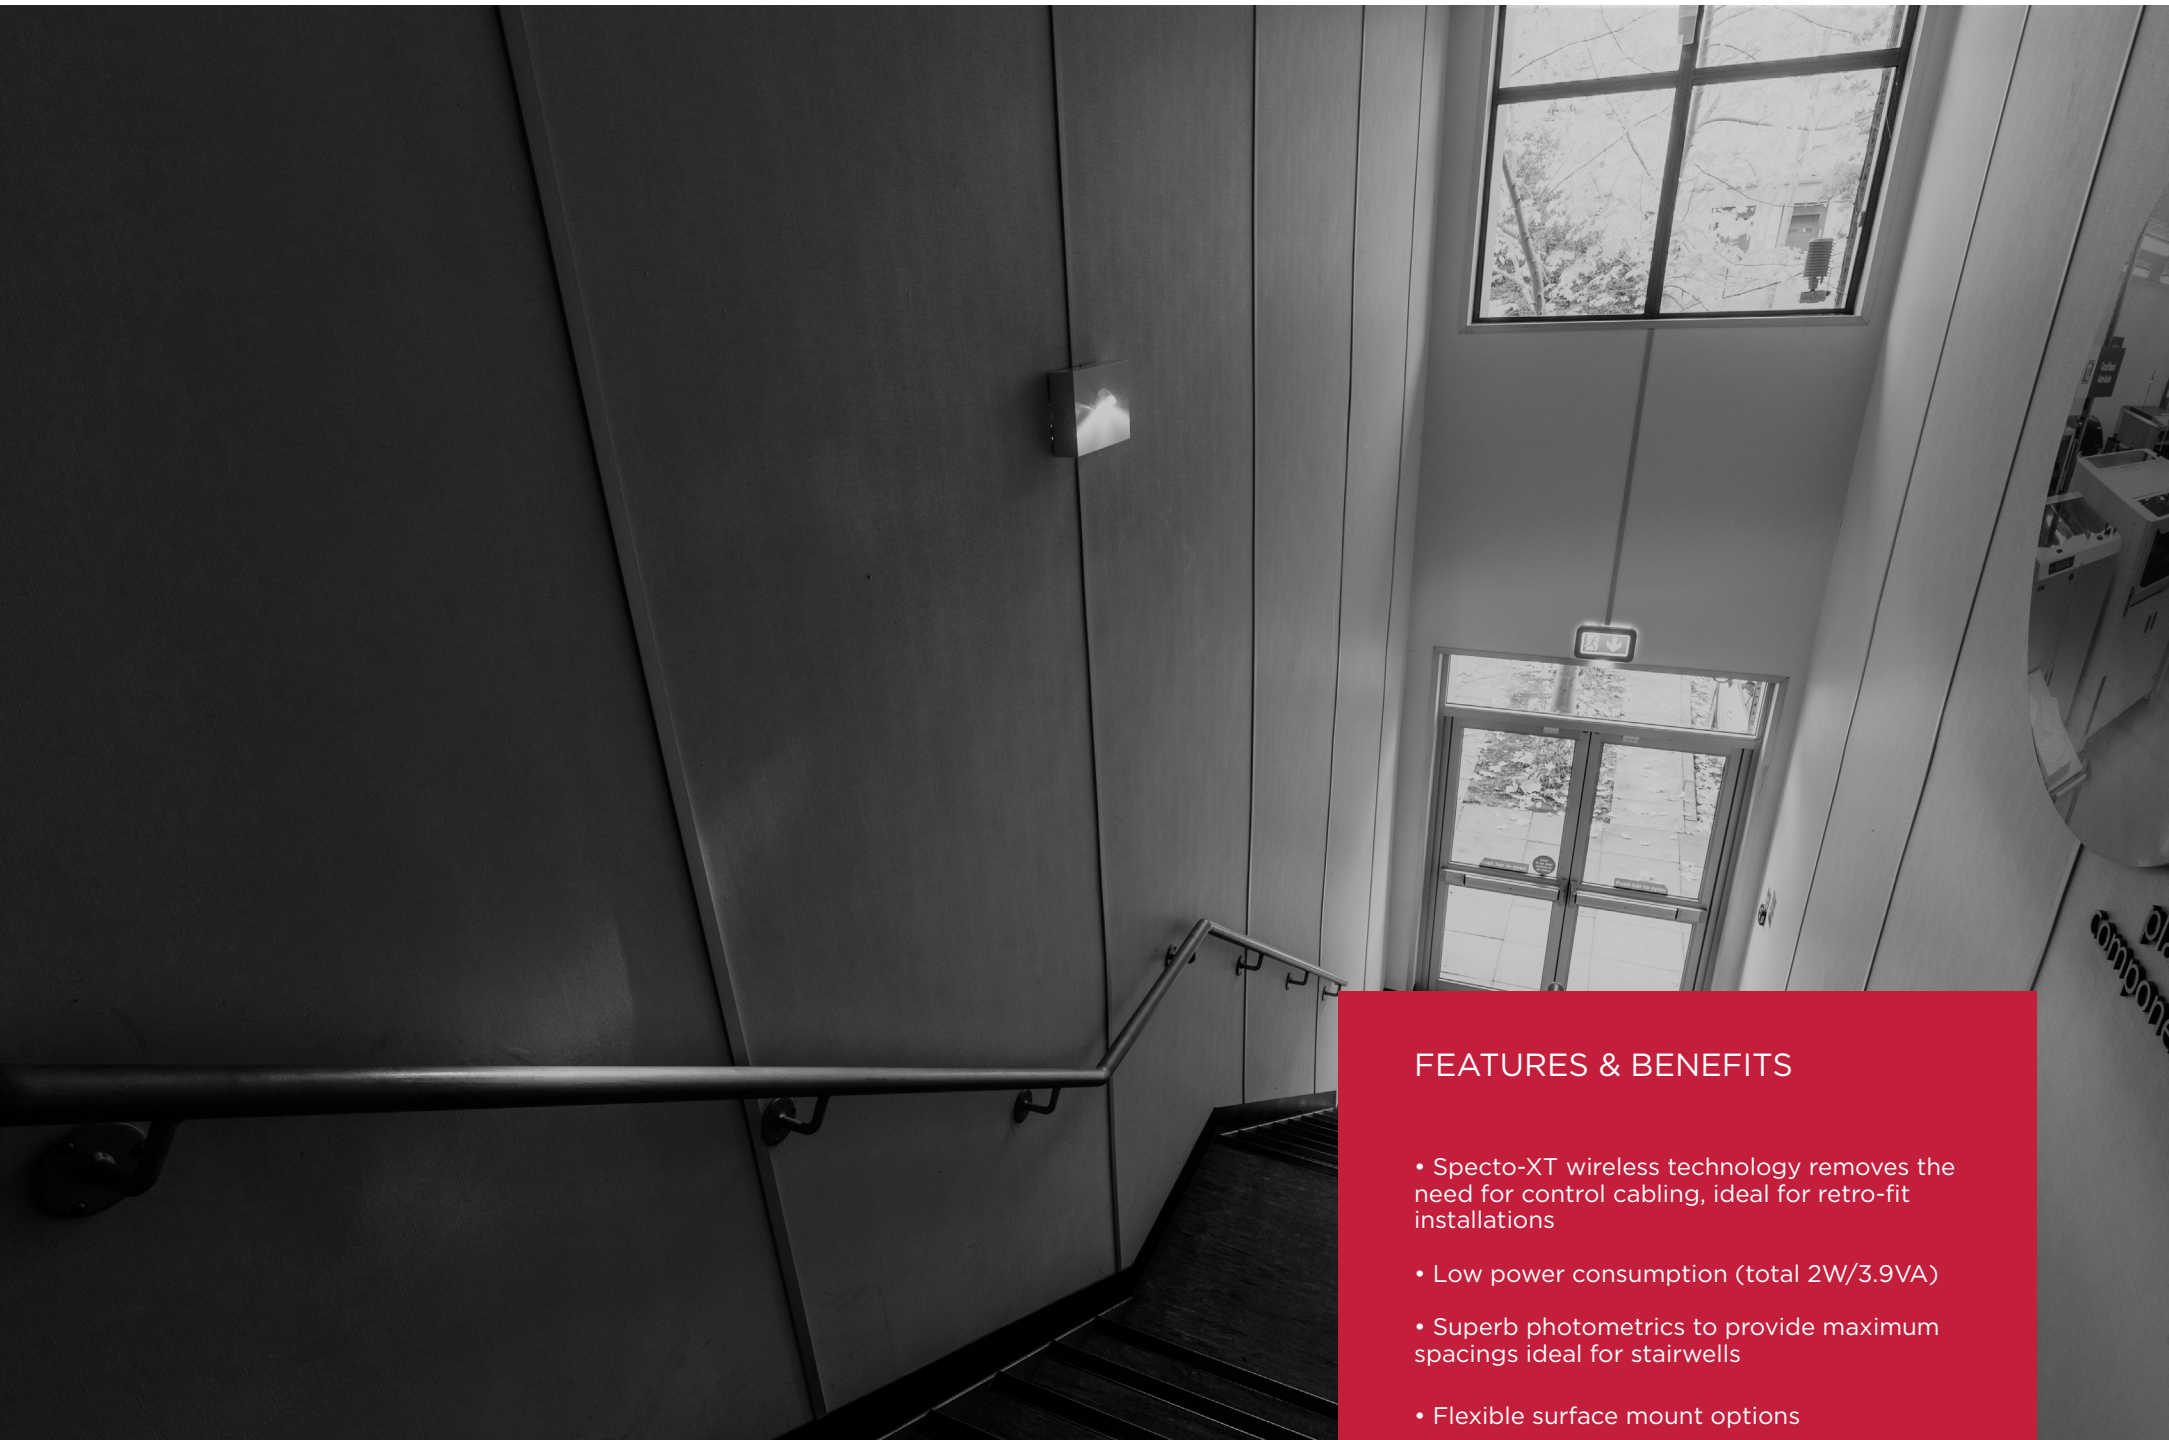

FEATURES & BENEFITS

- Specto-XT wireless technology removes the need for control cabling, ideal for retro-fit installations
- Low power consumption (total 2W/3.9VA)
- Superb photometrics to provide maximum spacings ideal for stairwells
- Flexible surface mount options