

2-NI PRO



IP20

9W

6
WARRANTY

KG
3.7


230v

DALI

NM



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

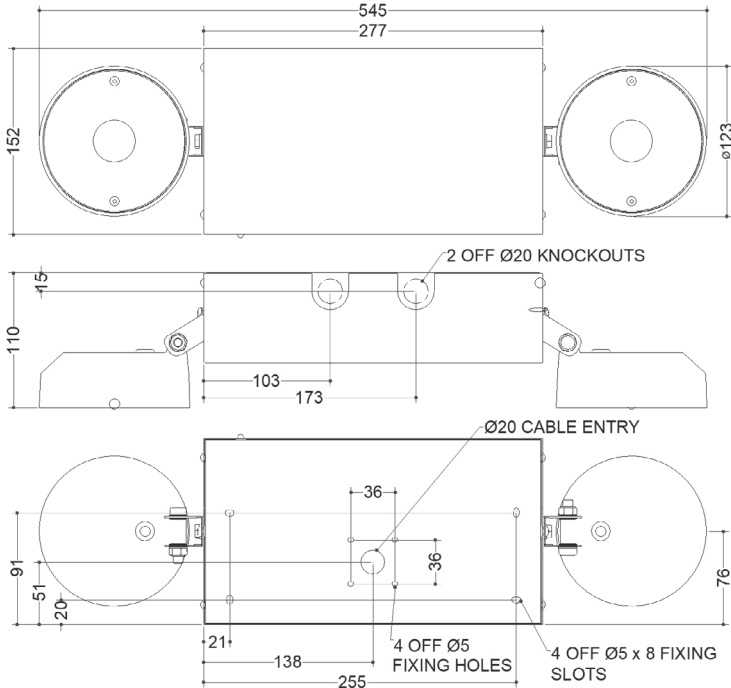

EXAMPLE PRODUCT CODE			AVTNP	299	LN	W
FAMILY	2NI PRO	AVTNP				
BEAM ANGLE	29° (2 X 585 LUMENS)	299				
	63° (2 X 585 LUMENS)	639				
CONTROL GEAR	MAINS/CENTRAL BATTERY*	LA				
	MAINS/CENTRAL BATTERY DALI*	DA				
	NON MAINTAINED SELF-CONTAINED	LN				
	NON MAINTAINED AUTOTEST	YS				
	NON MAINTAINED DALI	DS				
	NON MAINTAINED SPECTO-XT	XT				
COLOUR	GREY	G				
	BLACK	K				
	PENNY BRONZE	V				
	WHITE	W				

Example Code AVTNP299LNW 2-Ni Pro | 29 Deg | 9 Watt | Non-Maintained | White Finish

For more information on colours, please go to the **Finishes Page**.

*For input voltages please refer to our installation leaflets.

2-NI PRO REMOTE



IP20

9W

6

WARRANTY

KG

3.7

230v


DALI

Icon of person running

NM



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

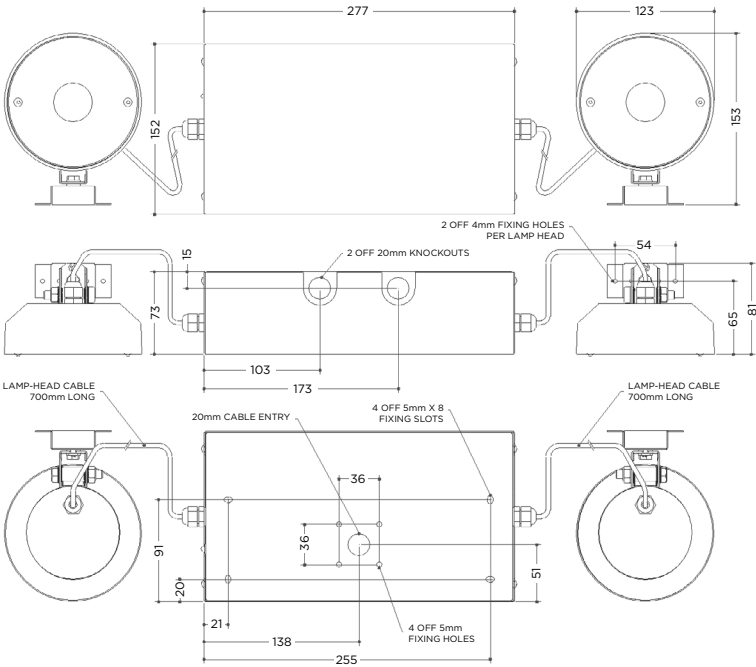

EXAMPLE PRODUCT CODE			AVTRP	299	LN	W
FAMILY	2NI PRO REMOTE	AVTRP				
BEAM ANGLE	29° (2 X 585 LUMENS)	299				
	63° (2 X 585 LUMENS)	639				
CONTROL GEAR	MAINS/CENTRAL BATTERY*	LA				
	MAINS/CENTRAL BATTERY DALI*	DA				
	NON MAINTAINED SELF-CONTAINED	LN				
	NON MAINTAINED AUTOTEST	YS				
	NON MAINTAINED DALI	DS				
	NON MAINTAINED SPECTO-XT	XT				
COLOUR	GREY	G				
	BLACK	K				
	PENNY BRONZE	V				
	WHITE	W				

Example Code AVTRP299LNW 2-Ni Pro Remote | 29 Deg | 9 Watt | Non-Maintained | White Finish
For more information on colours, please go to the **Finishes Page**.
*For input voltages please refer to our installation leaflets.

2-NI PRO & 2-NI PRO REMOTE



IP20 9W

6
WARRANTY
KG
3.7

230v DALI

NM



EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

AVT*P299 30°

MOUNTING HEIGHT	0.5 LUX				1 LUX			
2.0	4.3	13.4	4.6	2.5	6.2	12.8	3.6	2.0
2.5	5.1	16.0	5.2	2.7	6.7	14.6	4.2	2.4
3.0	5.9	18.0	5.8	3.0	7.1	16.2	4.8	2.8
3.5	6.7	19.4	6.4	3.4	7.5	17.4	5.6	3.2
4.0	7.5	21.0	6.8	3.8	7.8	18.0	6.4	3.5
4.5	8.1	23.0	7.6	3.9	8.1	18.6	7.0	3.9

All spacings based on a distance of 420mm LED to LED for remote version.

All spacings based on a 30° angle measured from the body to the head.

AVT*P639 30°

MOUNTING HEIGHT	0.5 LUX				1 LUX			
2.0	4.9	13.6	5.2	2.7	6.5	13.4	4.0	2.3
2.5	5.5	16.4	6.0	3.0	7.2	15.2	4.8	2.6
3.0	6.1	18.6	6.6	3.4	7.6	16.8	5.4	2.9
3.5	6.7	20.4	7.2	3.7	8.1	18.2	6.0	3.3
4.0	7.5	22.2	8.0	4.0	8.5	19.2	6.6	3.7
4.5	8.3	23.6	8.6	4.3	8.8	20.0	7.4	4.0

All spacings based on a distance of 420mm LED to LED for remote version.


All spacings based on a 30° angle measured from the body to the head.

2-NI PRO & 2-NI PRO REMOTE



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

AVT*P639

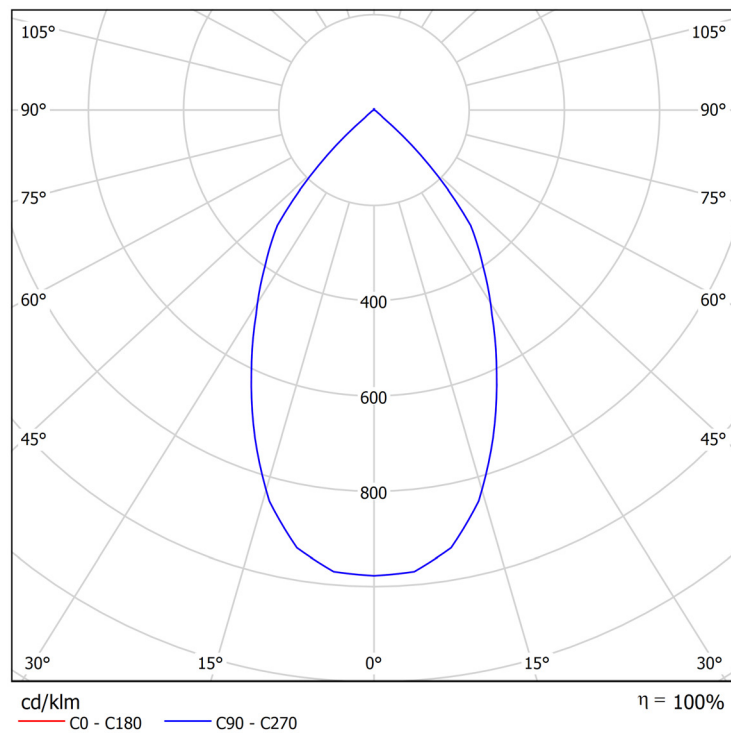

AVT*P299

