

RIGA



230v

DALI

3hrs

IP66

6
WARRANTY

KG
2.2

4K

IK08

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L80/B10
PROTECTION	-
DRIVER EFFICIENCY	>84%
REPLACEABLE	YES
POWER FACTOR	>0.93
LL/CW	167.9



EXAMPLE PRODUCT CODE		RIGA	XTA	4870
PRODUCT	RIGA	RIGA		
CONTROL	FIXED OUTPUT/ CENTRAL BATTERY	LA		
	3 HOUR MAINTAINED	LM		
	3 HOUR DALI MAINTAINED DIMMABLE	DL		
	3 HOUR MAINTAINED WITH SPECTO-XT	XT		
	3 HOUR MAINTAINED WITH SPECTO-XT PIR	XTA		
	CENTRAL BATTERY WITH SPECTO-XT PIR	MXTA		
LED	24W, 4870 LUMENS (2.2KG)	4870		
	34W, 6435 LUMENS (2.2KG)	6435		
	49W, 9255 LUMENS (2.2KG)	9255		

RIGAXTA4870 RIGA | 3 Hour Maintained With Specto-XT PIR | 24W, 4870 LUMENS
This product contains a light source of energy efficiency class A.
1200mm length versions available on request

ACCESSORIES


PRODUCT	STAINLESS STEEL COVER CLIP - 14 REQUIRED FOR 1500mm VERSIONS	TP20807
---------	--	---------

RIGA




- 230v
- DALI
- 3hrs
- IP66
- WARRANTY 6
- 4K
- IK08

POLAR CURVE

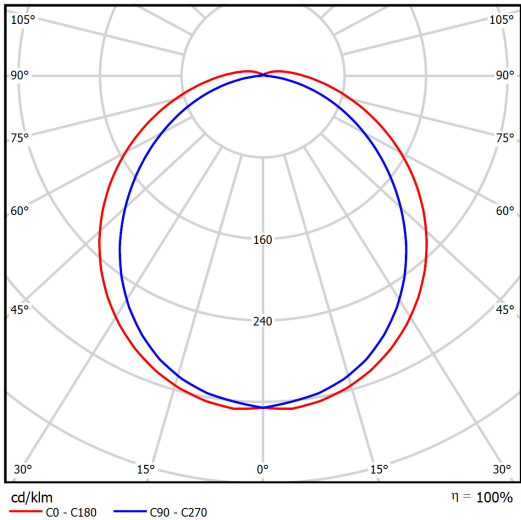

AMBIENT OPERATING TEMPERATURES

STANDARD/SPECTO-XT		EMERGENCY	
MINIMUM	MAXIMUM	MINIMUM	MAXIMUM
-20°C	40°C	0°C	25°C





DIRECT
Pair of stainless steel brackets supplied.
Provides clearance for thermal expansion and fixing.





PENDANT
Pair of steel spring loops supplied




STANDARD

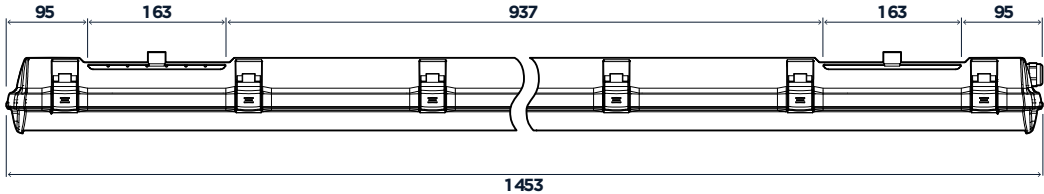

SPECTO XT

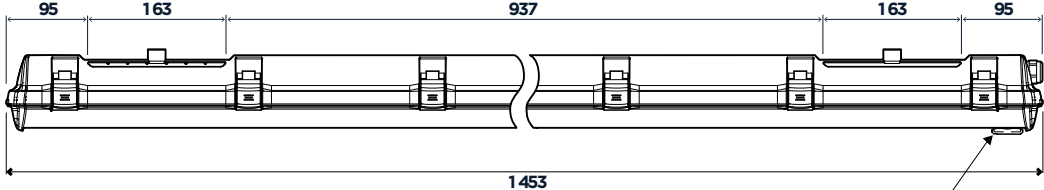

Specto-XT Sensor

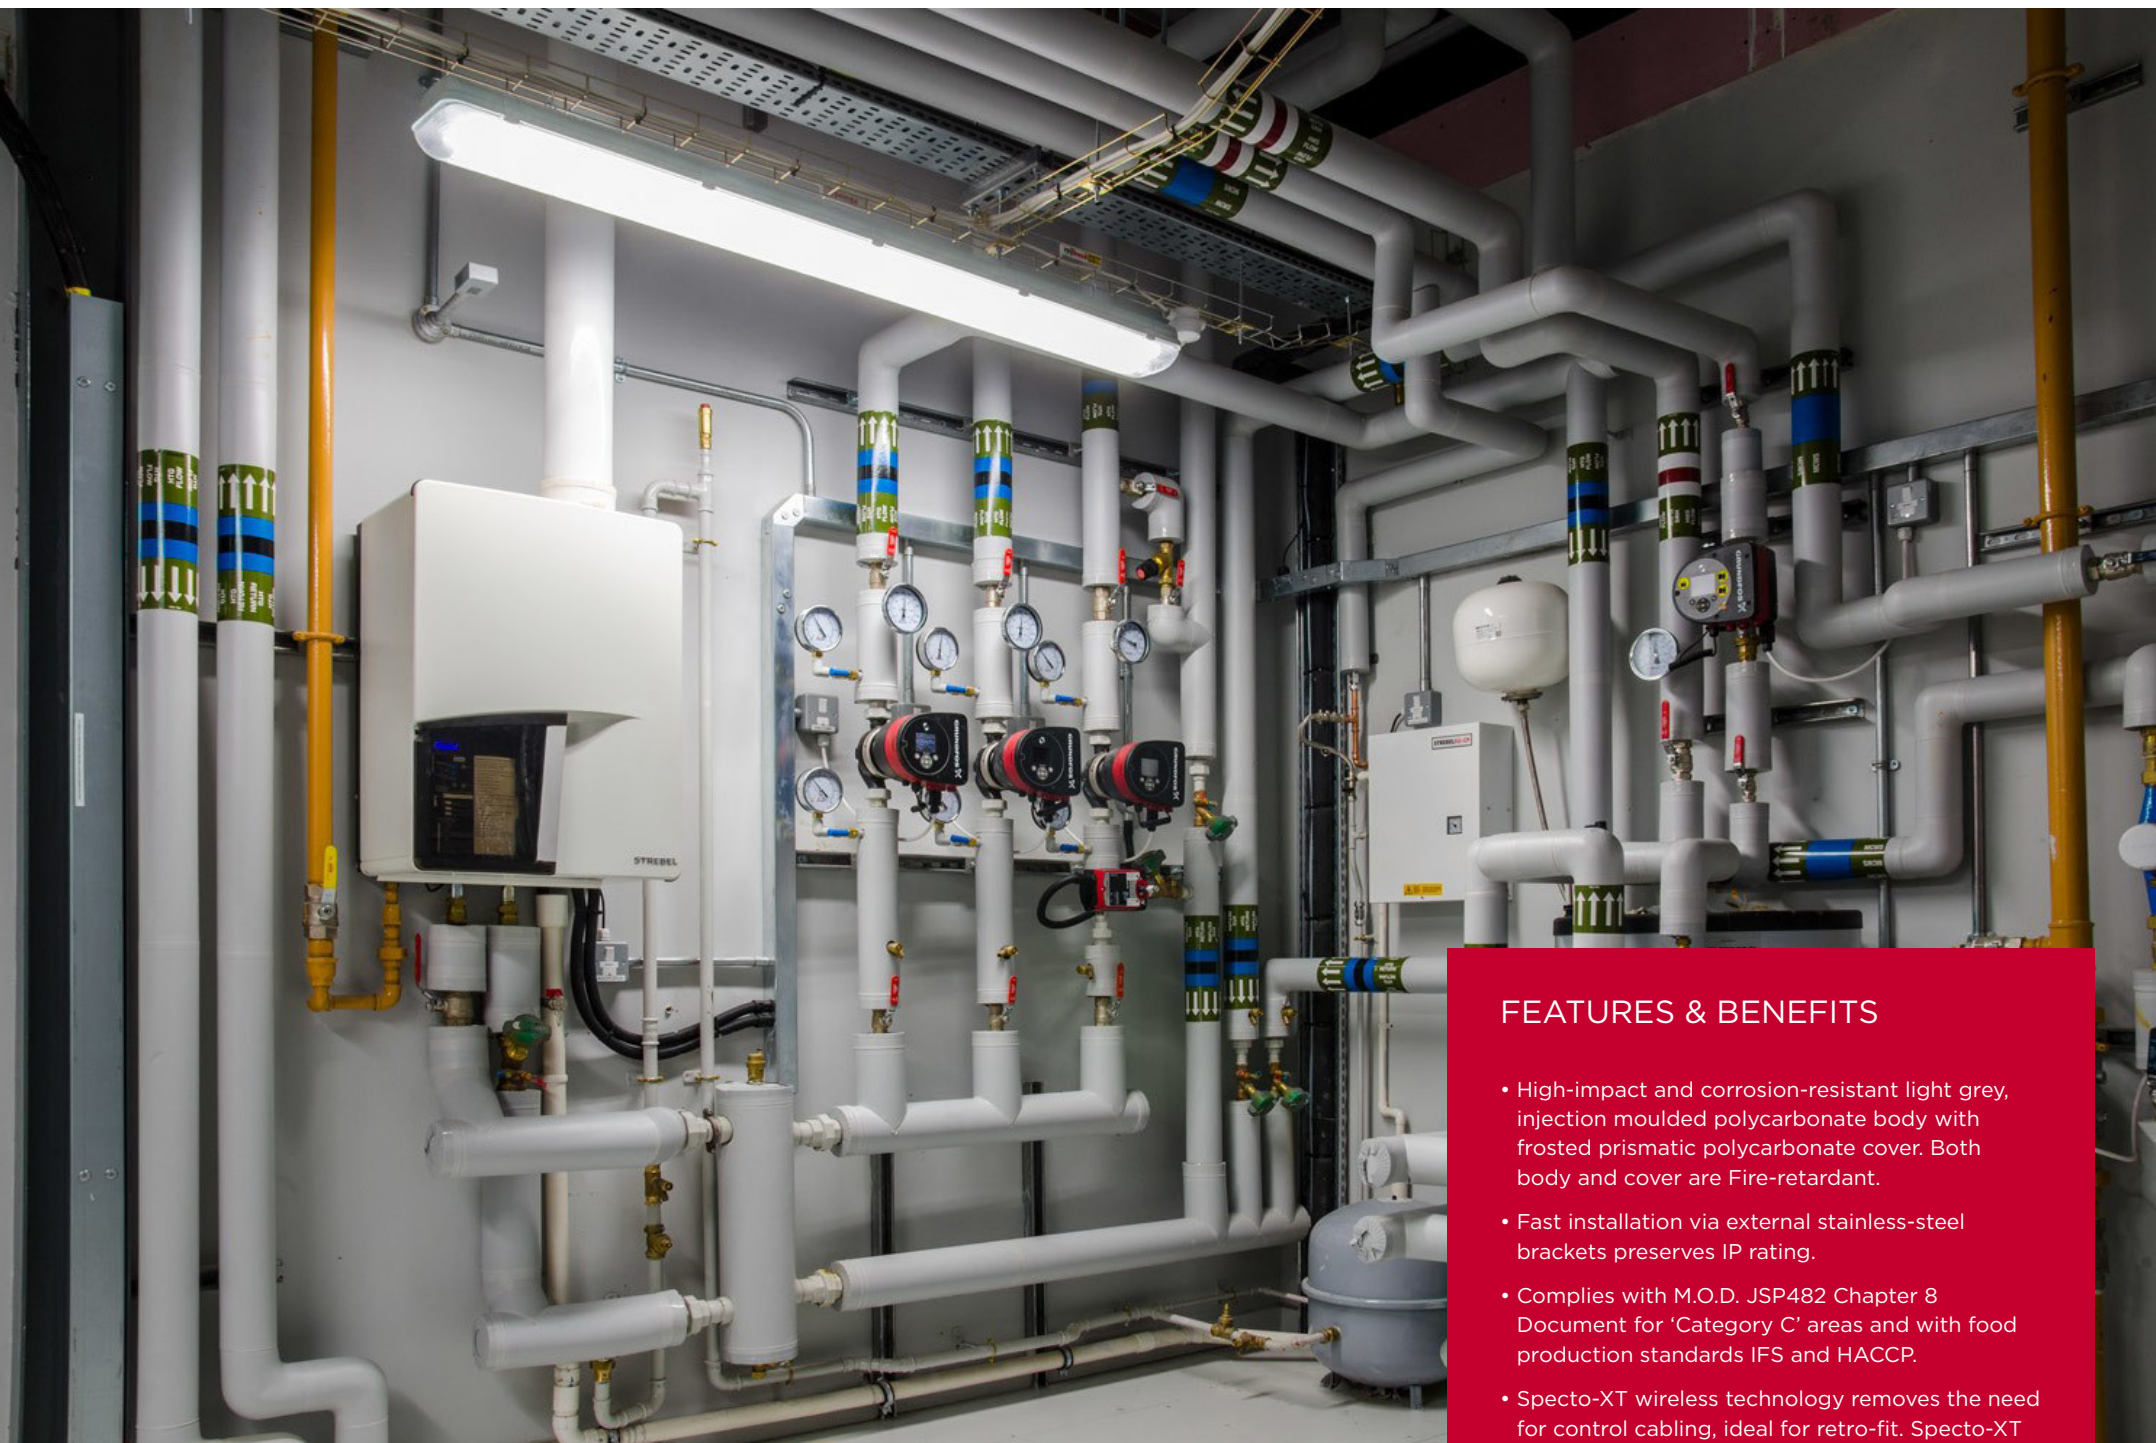

FEATURES & BENEFITS

- High-impact and corrosion-resistant light grey, injection moulded polycarbonate body with frosted prismatic polycarbonate cover. Both body and cover are Fire-retardant.
- Fast installation via external stainless-steel brackets preserves IP rating.
- Complies with M.O.D. JSP482 Chapter 8 Document for 'Category C' areas and with food production standards IFS and HACCP.
- Specto-XT wireless technology removes the need for control cabling, ideal for retro-fit. Specto-XT versions for use up to 4 metres mounting height.