


ION ROD SUSPENDED



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

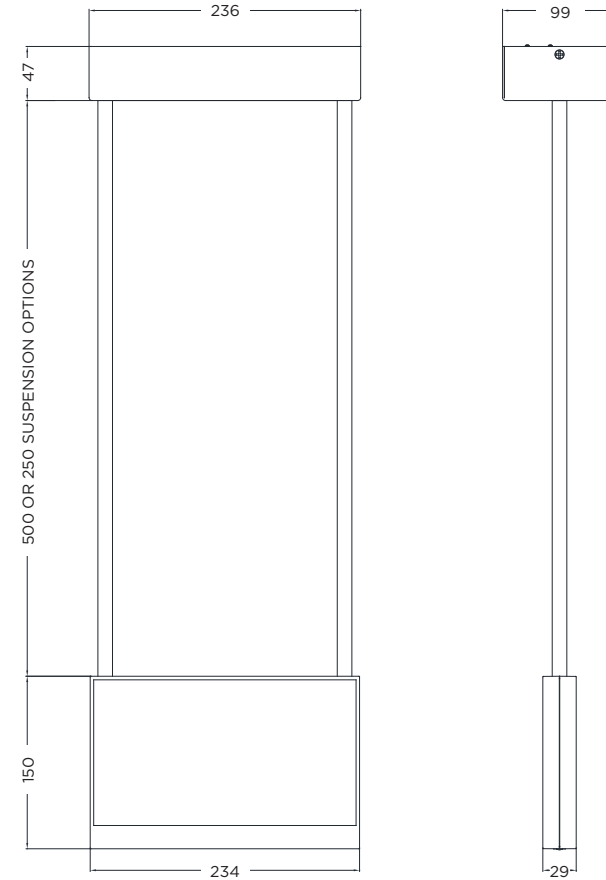


ION ROD SUSPENDED



- IP20
- NM/MM
- 6 WARRANTY
- KG 1.5
- 230v
- 1
- 1W
- DALI



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

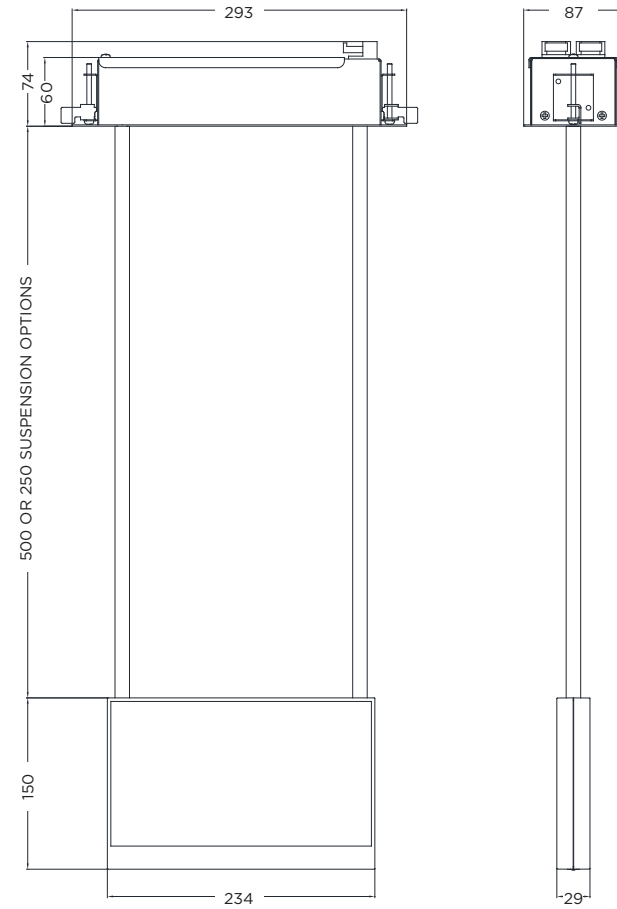


ION WIRE SUSPENDED



- IP20
- NM/MM
- 6 WARRANTY
- KG 1.5
- 230v
- DALI
- 1W



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

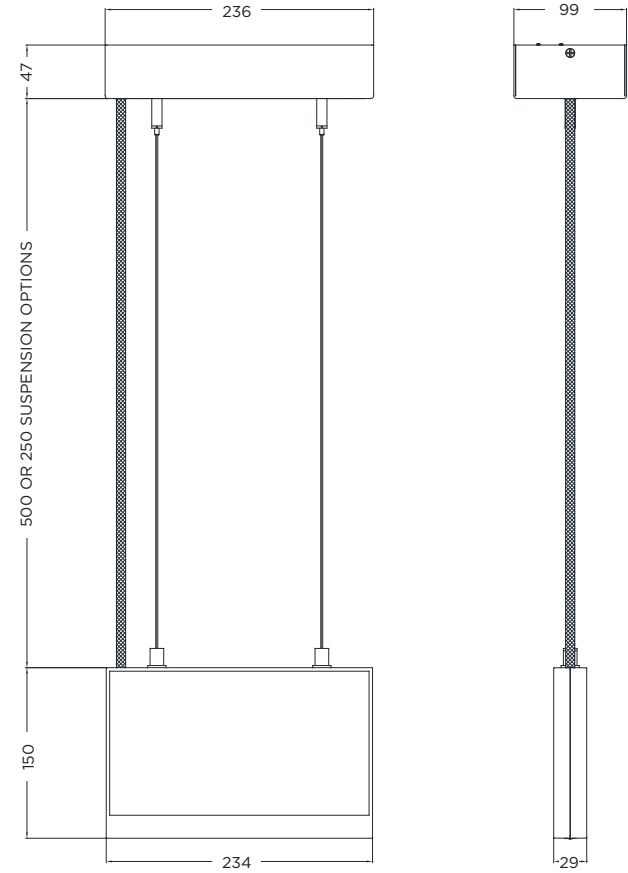


ION WIRE SUSPENDED



- IP20
- NM/MM
- 6 WARRANTY
- KG 1.5
- 230v
- DALI
- 1W



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

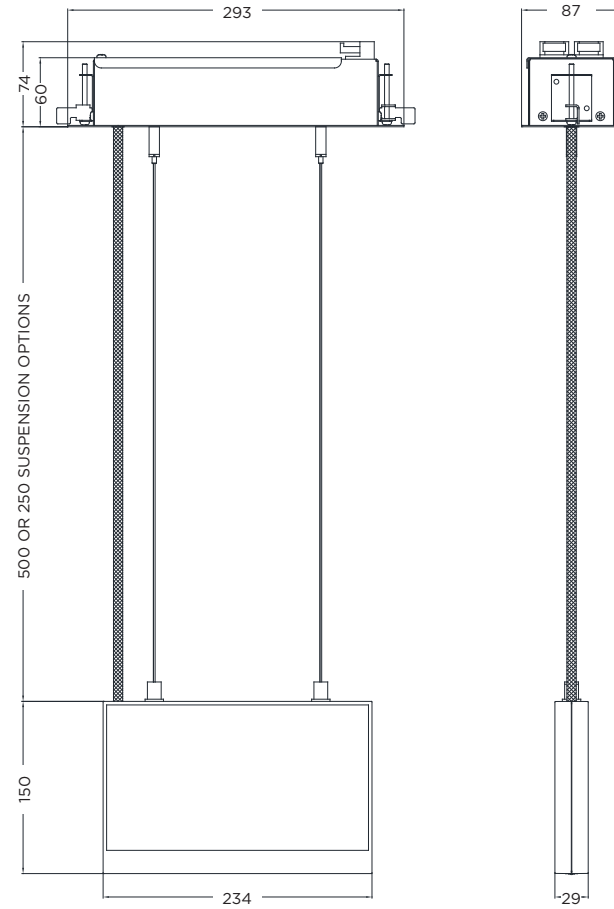

ION SUSPENDED



- IP20

NM/MM
- 6
WARRANTY

KG
1.5
- 230v
- 1W

DALI



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

EXAMPLE PRODUCT CODE		ION	C	S	R	500	LM	W	IS	S	U
FAMILY	ION	ION									
TYPE	CEILING	C									
MOUNT	SURFACE	S									
	RECESSED	R									
VERSION	SUSPENDED ROD	R									
	SUSPENDED WIRE	W									
LENGTH	500mm LENGTH**	500									
	250mm LENGTH**	250									
CONTROL	MAINS/CENTRAL BATTERY*	LA									
	DALI MAINS/CENTRAL BATTERY*	DA									
	MAINTAINED SELF-CONTAINED	LM									
	MAINTAINED DALI	DL									
	MAINTAINED SPECTO-XT	XT									
COLOUR	WHITE (RAL 9016)	W									
	BLACK (RAL9005)	K									
	GREY (RAL 9006)	G									
LEGEND TYPE	ISO 7010	IS									
LEGEND SIDE	SINGLE SIDED	S									
	DOUBLE SIDED	D									
ARROW DIRECTION	UP	U									
	DOWN	D									
	LEFT	L									
	RIGHT	R									

Example Code IONCSR500LMWISSU ION | Ceiling | Surface | Suspended Rod | 500mm Length | Maintained Self-Contained | White (RAL 9016) | ISO 7010 | Single Sided | Up Arrow

For more information on colours, please go to the **Finishes Page**.

*For input voltages please refer to our installation leaflets.

**Maximum suspension length is 500mm