

ION ROD SUSPENDED





EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

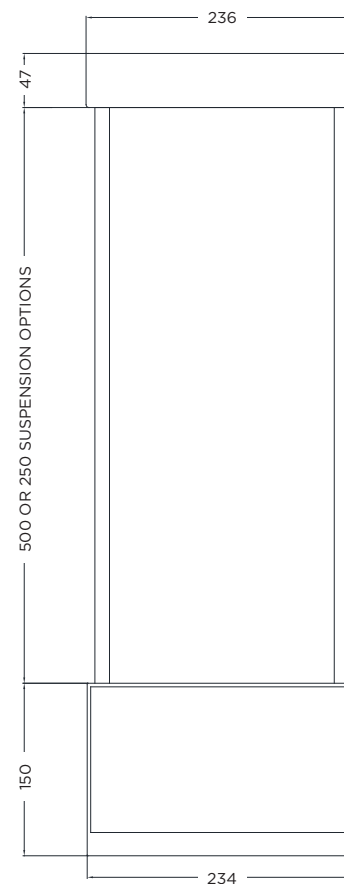

ION ROD SUSPENDED




EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

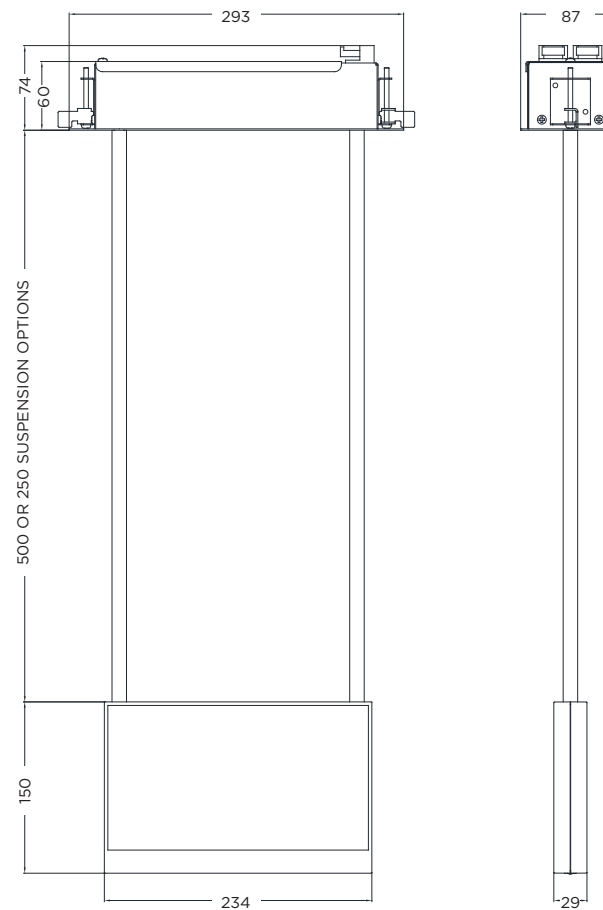

ION WIRE SUSPENDED




EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

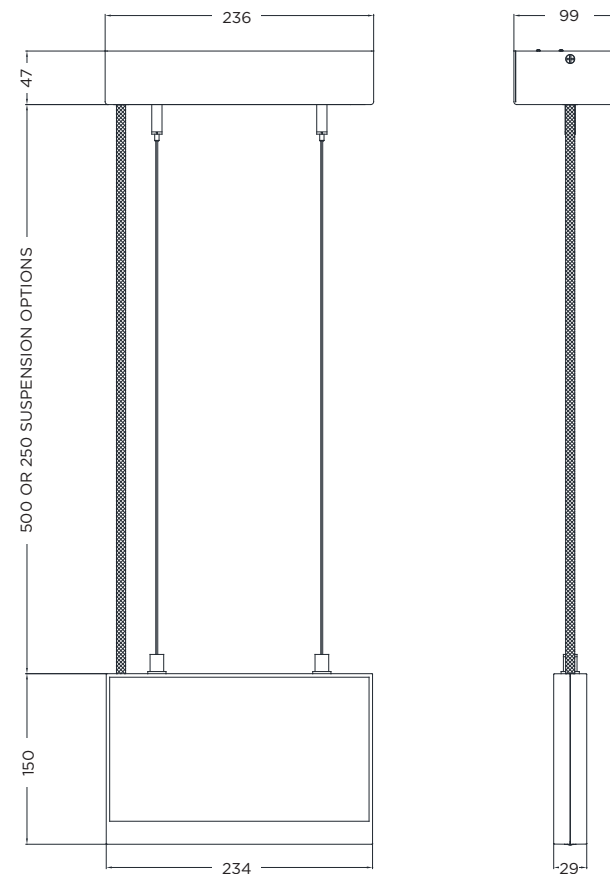

ION WIRE SUSPENDED




EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

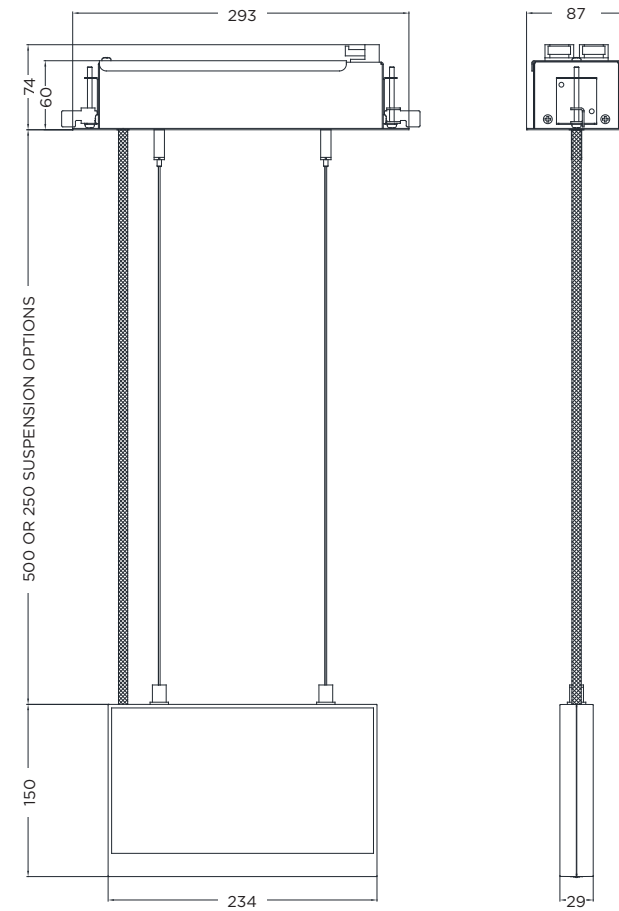

ION SUSPENDED



EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

EXAMPLE PRODUCT CODE			ION	C	S	R	500	LM	W	IS	S	U
FAMILY	ION	ION										
TYPE	CEILING	C										
MOUNT	SURFACE	S										
	RECESSED	R										
VERSION	SUSPENDED ROD	R										
	SUSPENDED WIRE	W										
LENGTH	500mm LENGTH**	500										
	250mm LENGTH**	250										
CONTROL	MAINS/CENTRAL BATTERY*	LA										
	DALI MAINS/CENTRAL BATTERY*	DA										
	MAINTAINED SELF-CONTAINED	LM										
	MAINTAINED DALI	DL										
	MAINTAINED SPECTO-XT	XT										
COLOUR	WHITE (RAL 9016)	W										
	BLACK (RAL9005)	K										
	GREY (RAL 9006)	G										
	PENNY BRONZE	V										
LEGEND TYPE	ISO 7010	IS										
LEGEND SIDE	SINGLE SIDED	S										
	DOUBLE SIDED	D										
ARROW DIRECTION	UP	U										
	DOWN	D										
	LEFT	L										
	RIGHT	R										

Example Code IONCSR500LMWISSU ION | Ceiling | Surface | Suspended Rod | 500mm Length | Maintained Self-Contained | White (RAL 9016) | ISO 7010 | Single Sided | Up Arrow

For more information on colours, please go to the **Finishes Page**.

*For input voltages please refer to our installation leaflets.

**Maximum suspension length is 500mm

ACCESSORIES (ORDERED SEPARATELY)

Ceiling Reinforcement Panel

IONCRP