

FEATURES


Product Codes	Description	Supply voltage	Size
2615SL 2615SIL	Surface Mounted Single Section	220-240V AC 50/60Hz 24V DC	365 x 91 x 51mm
2615SLL 2615SILL	Surface Mounted with Sidelights Single Section	220-240V AC 50/60Hz 24V DC	365 x 91 x 51mm
2615FL 2615FIL	Flush Mounted Single Section	220-240V AC 50/60Hz 24V DC	Cover: 115 x 378 x 7.5mm Back Box: 88 x 361 x 45.5mm
2874SL 2875SL 2874SIL 2875SIL	Surface Mounted Single / Twin Section	220-240V AC 50/60Hz 24V DC	326 x 194 x 51mm
2874SLL 2875SLL 2874SILL 2875SILL	Surface Mounted with Sidelights Single / Twin Section	220-240V AC 50/60Hz 24V DC	326 x 194 x 51mm
2874FL 2875FL 2874FIL 2875FIL	Flush Mounted Single / Twin Section	220-240V AC 50/60Hz 24V DC	Cover: 210 x 339 x 7.5mm Back Box: 190 x 324 x 45.5mm
2879SL 2879SIL	Surface Mounted with Sidelights Twin Section	220-240V AC 50/60Hz 24V DC	180 x 240 x 51mm
2879FL 2879FIL	Flush Mounted Twin Section	220-240V AC 50/60Hz 24V DC	Cover: 193 x 263 x 7.5mm Back Box: 177 x 236 x 45.5mm
2940SLLL 2940SILLL	Surface Mounted Triple Section	220-240V AC 50/60Hz 24V DC	326 x 254 x 51mm
2940SLLLL 2940SILLLL	Surface Mounted with Sidelights Triple Section	220-240V AC 50/60Hz 24V DC	326 x 254 x 51mm
2940FLLL 2940FILLL	Flush Mounted Triple Section	220-240V AC 50/60Hz 24V DC	Cover: 270 x 340 x 7.5mm Back Box: 251 x 321 x 45.5mm

WARNING



- Do not stare at operating lamp. It may be harmful to the eyes.
- Tungsten lamps not to be used in continuous operation.

SUPPLY CONNECTIONS

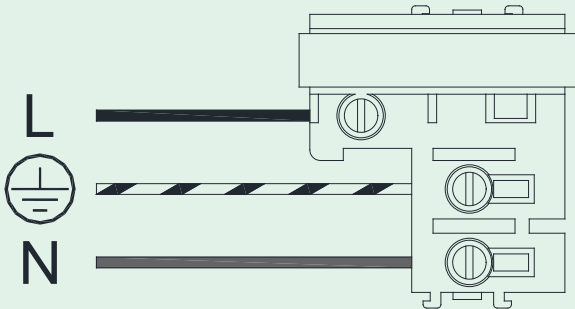


IMPORTANT-SAFETY


Before carrying out any servicing on this luminaire, ensure that the mains supply is fully isolated.
Disconnect luminaire before insulation testing of the installation.

GENERAL INSTALLATION - 2615SL, 2615SLL, 2615SIL, 2615SILL

1a.

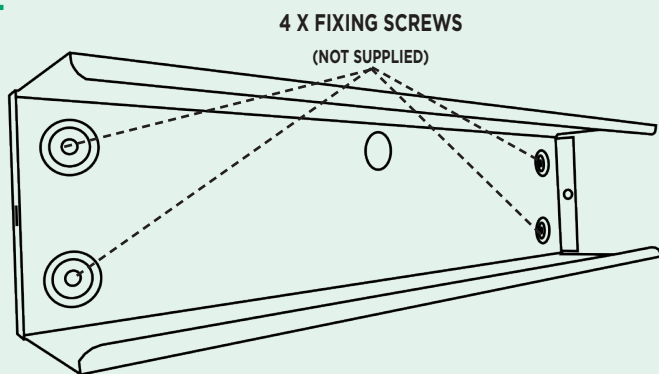


1b.

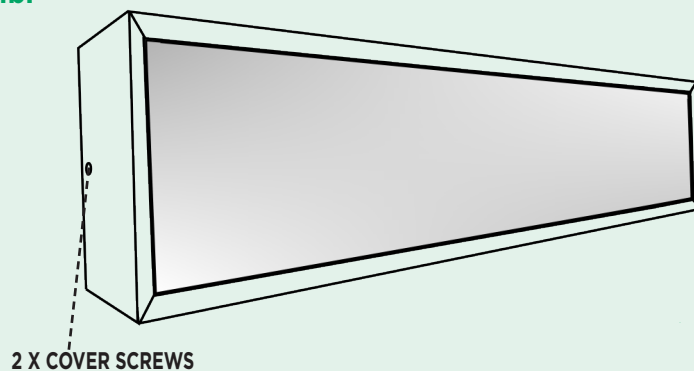


GENERAL INSTALLATION - 2874SL, 2874SLL, 2875SL, 2875SLL, 2874SIL, 2874SILL, 2875SIL, 2875SILL

2a.

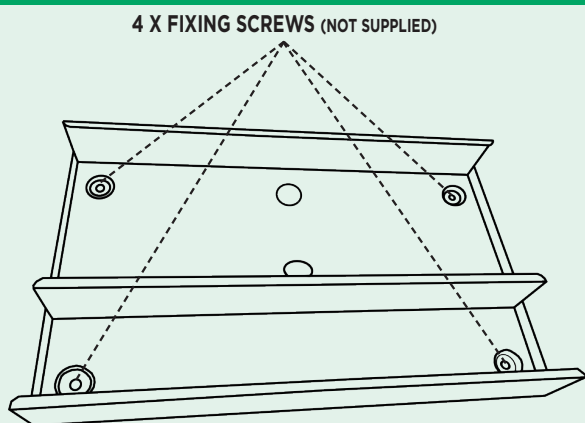


2b.

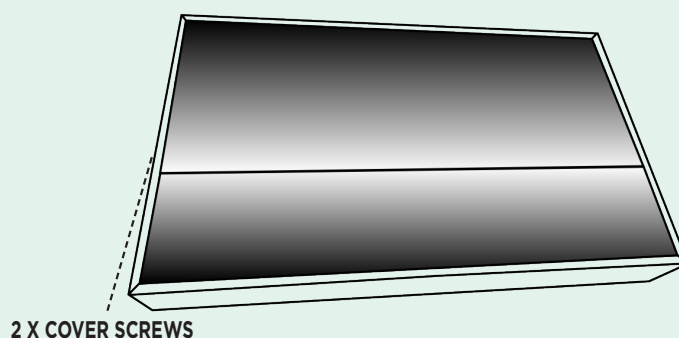


GENERAL INSTALLATION - 2879SL, 2879SIL

3a.

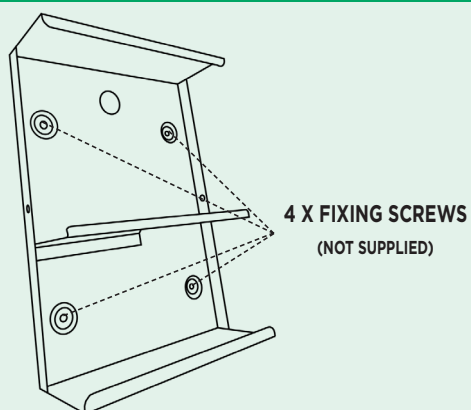


3b.

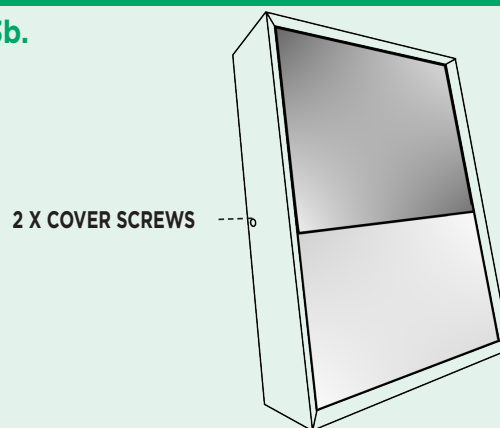


GENERAL INSTALLATION - 2940SLLL, 2940SLLLL, 2940SILL, 2940SILLL

4a.

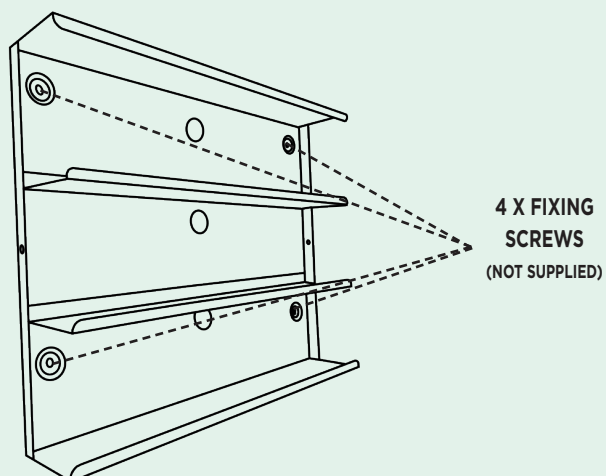


4b.

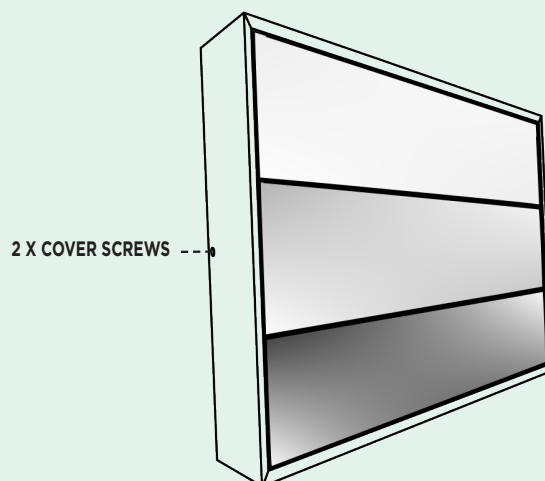


GENERAL INSTALLATION - 2615FL, 2615FIL

1a.

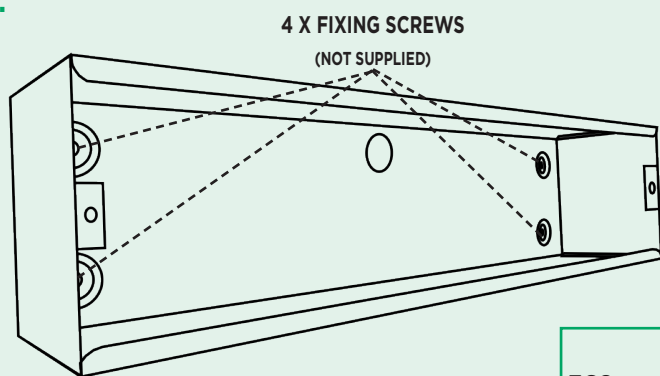


1b.

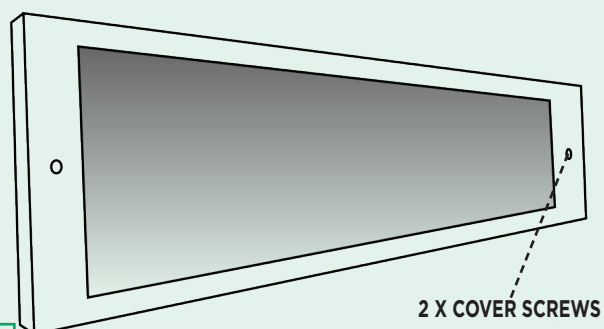


CUT OUT:
362mm x 89mm x 46mm

GENERAL INSTALLATION - 2874FL, 2875FL, 2874FIL, 2875FIL

2a.

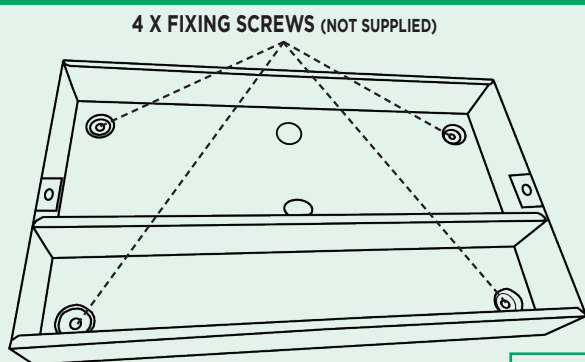


2b.

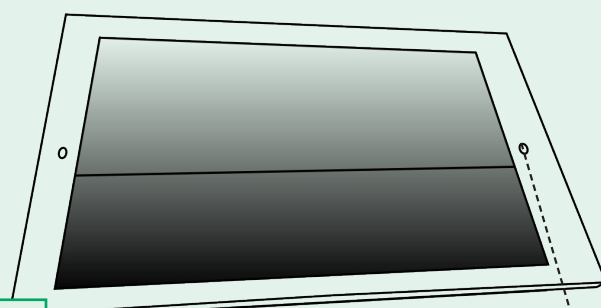


CUT OUT:
325mm x 192mm x 46mm

GENERAL INSTALLATION - 2879FL, 2879FIL

3a.

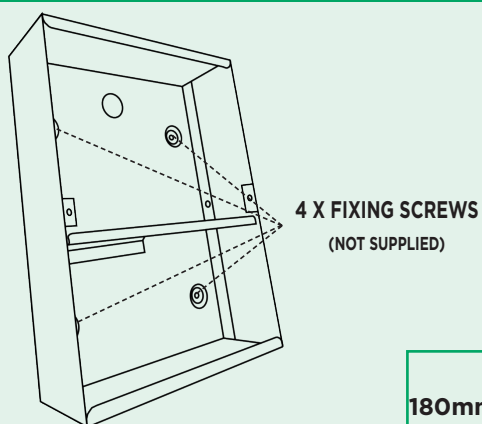


3b.

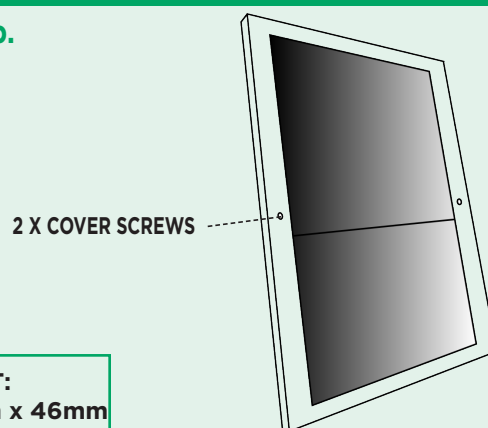


CUT OUT:
180mm x 238mm x 46mm

GENERAL INSTALLATION - 2940FLLL, 2940FILL

4a.

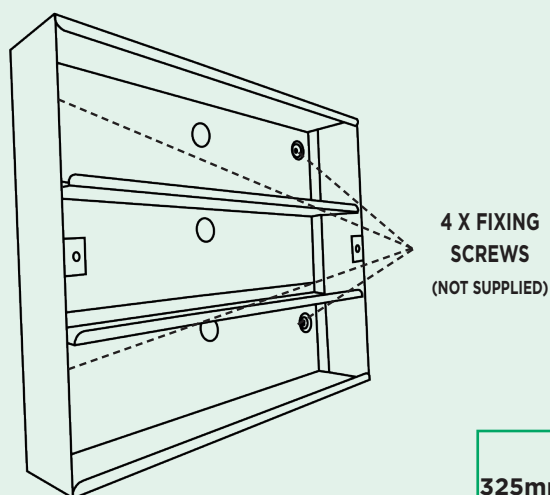

4b.

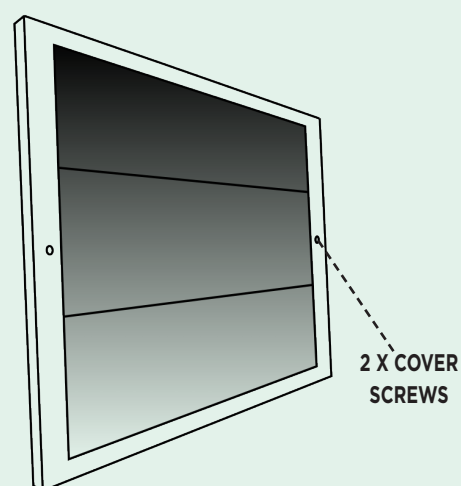

CUT OUT:
325mm x 252mm x 46mm

CLEANING INSTRUCTIONS



INFORMATION

Operation and Maintenance

Suitable for indoor use.

Ambient temperature 25°C.

Continual operation at mains voltages in excess of the rated voltage will reduce LED and expected gear life.

This luminaire uses plastic components in its construction and when installed in environments containing chemicals, degradation may occur.

Operation outside intended / stated parameters may cause a hazard, and in an extreme case, for example water ingress to electronic circuits, may cause a fire.

Please contact our Technical Department for advice.

Modifications

Philip Payne products should not be modified.

Any modification may render the product unsafe and will invalidate any Safety/Approval marks.

Philip Payne will not accept any responsibility for any modified products or for any damage caused as a result of their modification.

Testing

Testing can be carried out by using a sub circuit isolator or by switching off the lighting circuit at the circuit breaker.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



Philip Payne Limited, Thornhill House, Thornhill Road, Solihull, B91 2HB
+44 (0)121 705 2384 | sales@philippayne.co.uk | www.philippayne.co.uk

