

RIGA



230v

DALI

3hrs

IP66

WARRANTY 6

KG 2.2

4K

IK08

LED CHARACTERISTICS	
CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L80/B10
PROTECTION	-
DRIVER EFFICIENCY	>84%
REPLACEABLE	YES
POWER FACTOR	>0.93
LL/CW	167.9



EXAMPLE PRODUCT CODE		RIGA	XTA	4870
PRODUCT	RIGA	RIGA		
CONTROL	FIXED OUTPUT/ CENTRAL BATTERY	LA		
	3 HOUR MAINTAINED ¹	LM		
	3 HOUR DALI MAINTAINED DIMMABLE ¹	DL		
	3 HOUR MAINTAINED WITH SPECTO-XT ¹	XT		
	3 HOUR MAINTAINED WITH SPECTO-XT PIR ¹	XTA		
	CENTRAL BATTERY WITH SPECTO-XT PIR	MXTA		
LED	24W, 4870 LUMENS (2.2KG)	4870		
	34W, 6435 LUMENS (2.2KG)	6435		
	49W, 9255 LUMENS (2.2KG)	9255		

RIGAXTA4870 RIGA | 3 Hour Maintained With Specto-XT PIR | 24W, 4870 LUMENS
This product contains a light source of energy efficiency class A.
1200mm length versions available on request
¹Emergency Lumen Output = 715lm

ACCESSORIES		
PRODUCT	STAINLESS STEEL COVER CLIP - 14 REQUIRED FOR 1500mm VERSIONS	TP20807

RIGA



230v

3hrs

KG 2.2

IK08


DALI

IP66

WARRANTY 6


4K

POLAR CURVE

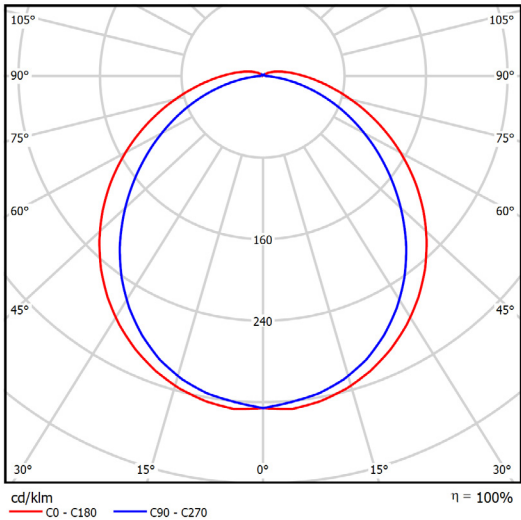

AMBIENT OPERATING TEMPERATURES

STANDARD/SPECTO-XT		EMERGENCY	
MINIMUM	MAXIMUM	MINIMUM	MAXIMUM
-20°C	40°C	0°C	25°C





DIRECT
Pair of stainless steel brackets supplied.
Provides clearance for thermal expansion and fixing.






PENDANT
Pair of steel spring loops supplied

STANDARD

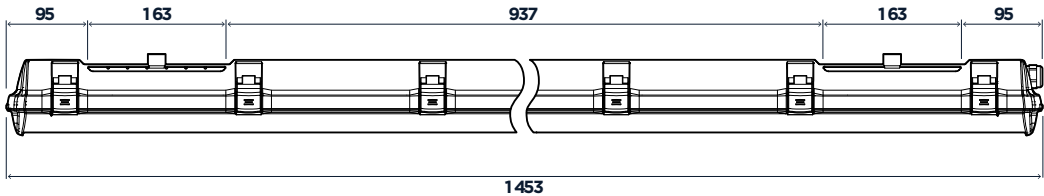

SPECTO XT

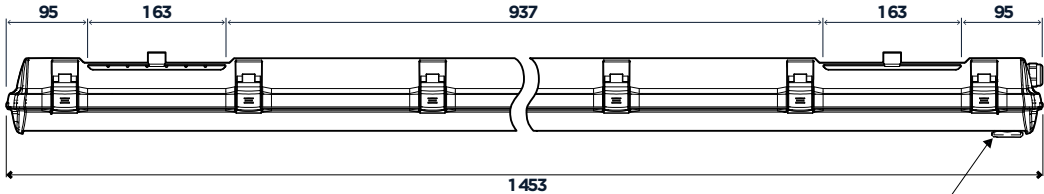

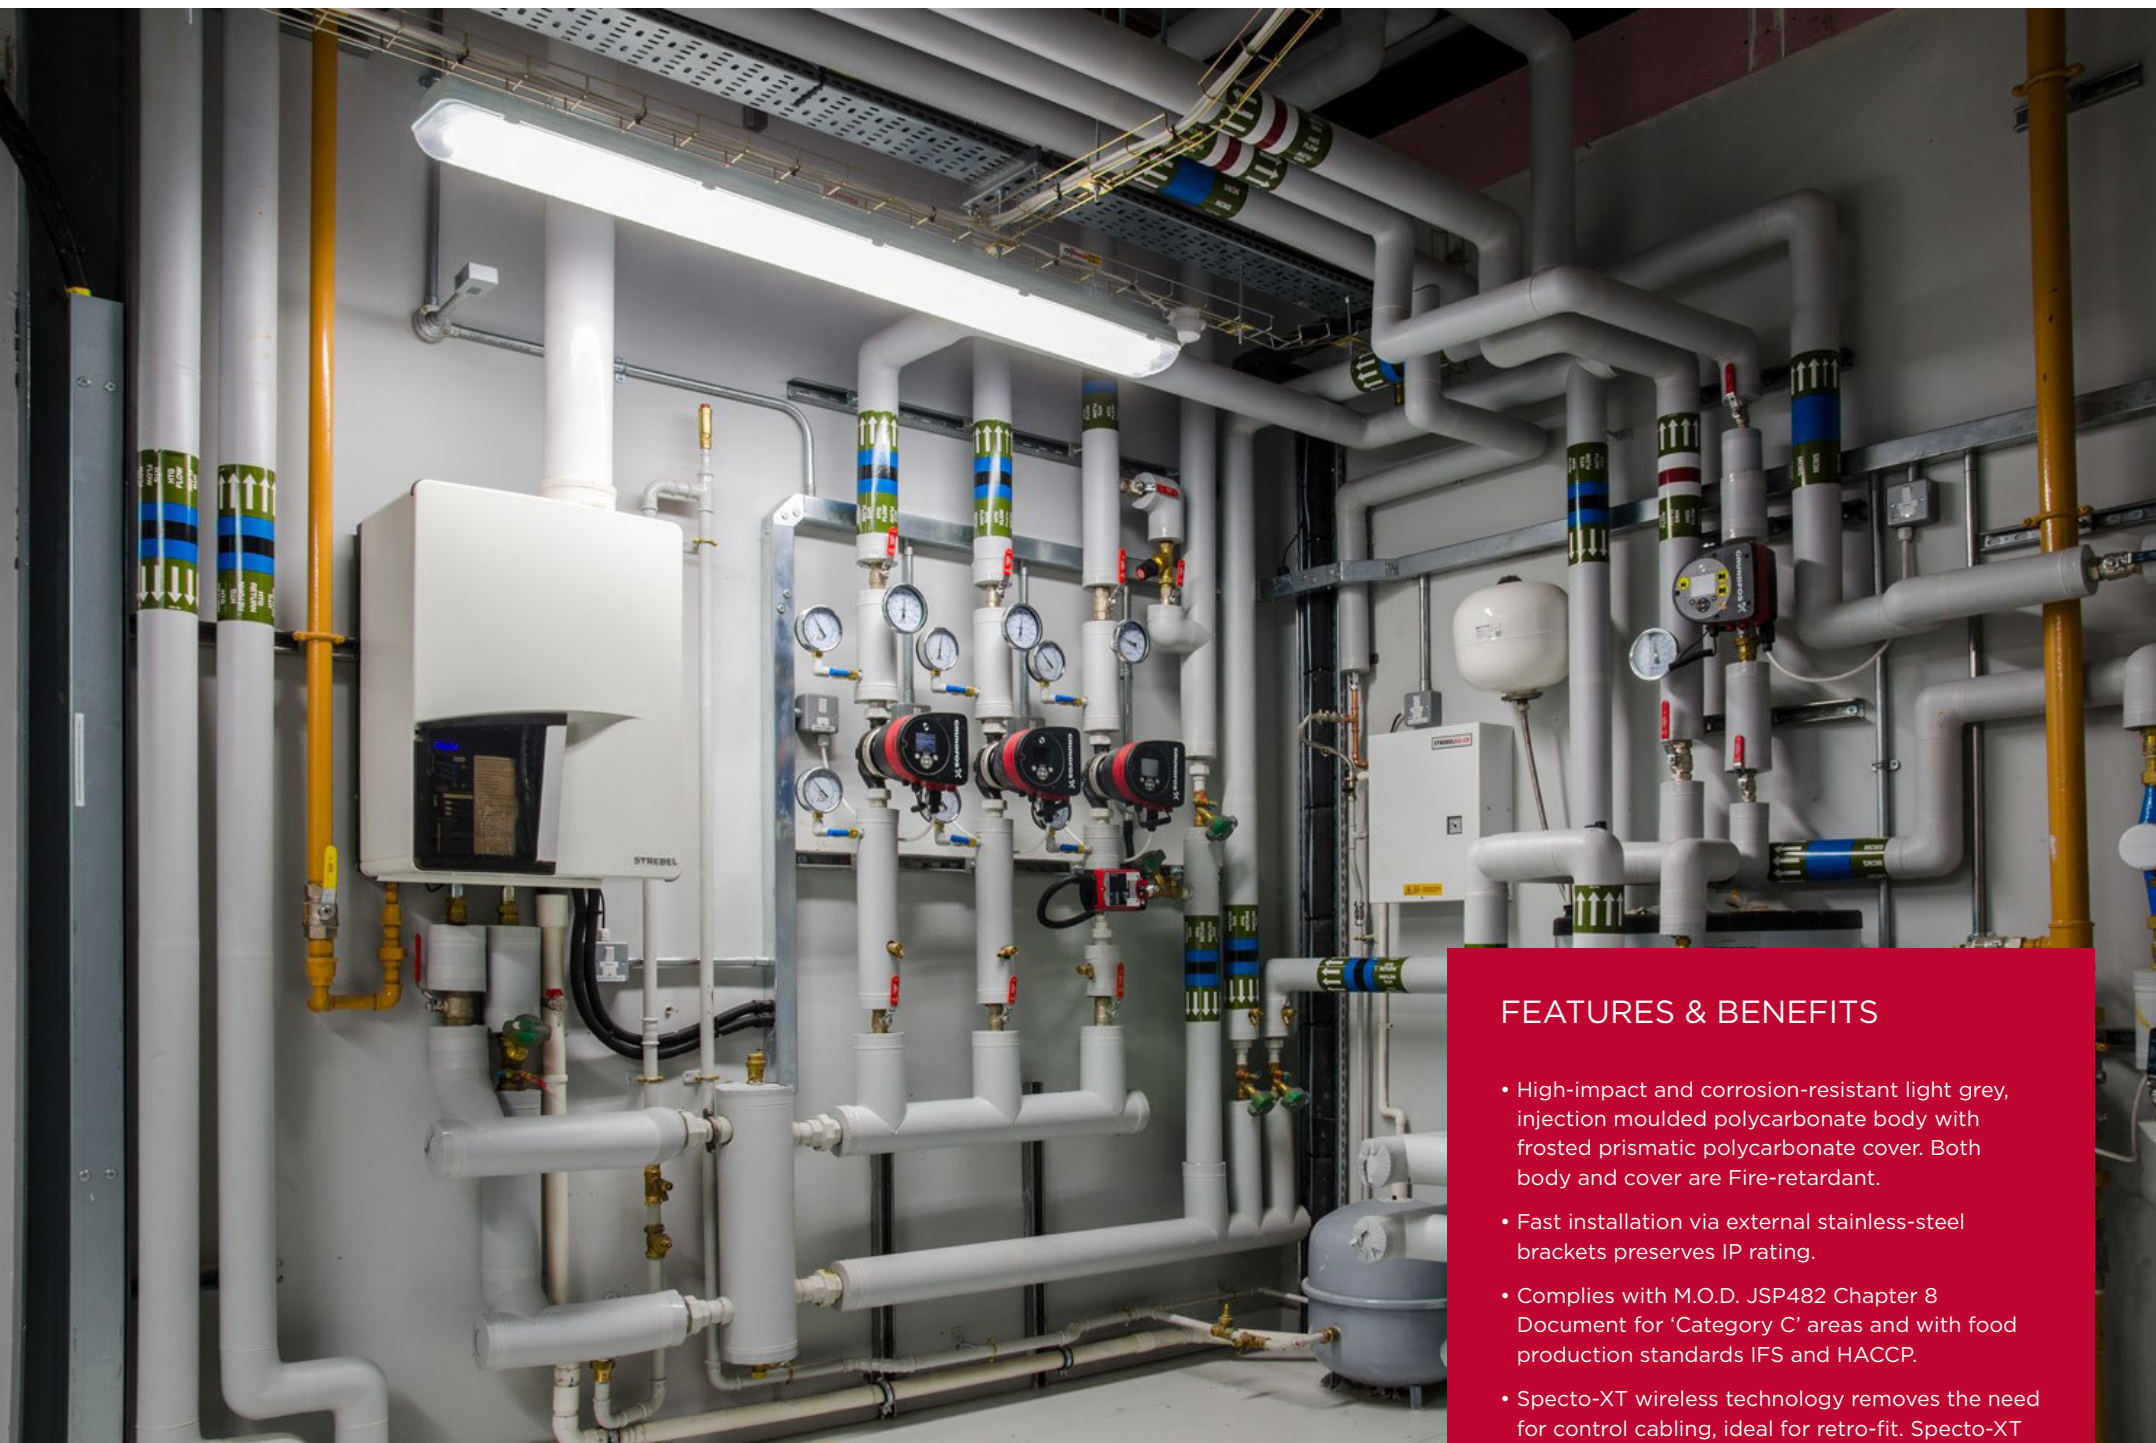

FEATURES & BENEFITS

- High-impact and corrosion-resistant light grey, injection moulded polycarbonate body with frosted prismatic polycarbonate cover. Both body and cover are Fire-retardant.
- Fast installation via external stainless-steel brackets preserves IP rating.
- Complies with M.O.D. JSP482 Chapter 8 Document for 'Category C' areas and with food production standards IFS and HACCP.
- Specto-XT wireless technology removes the need for control cabling, ideal for retro-fit. Specto-XT versions for use up to 4 metres mounting height.