

# HENLEY ROD SUSPENDED



IP20

IK09

26m

1.5

230v


DALI

NM/MM


1W

6

WARRANTY



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

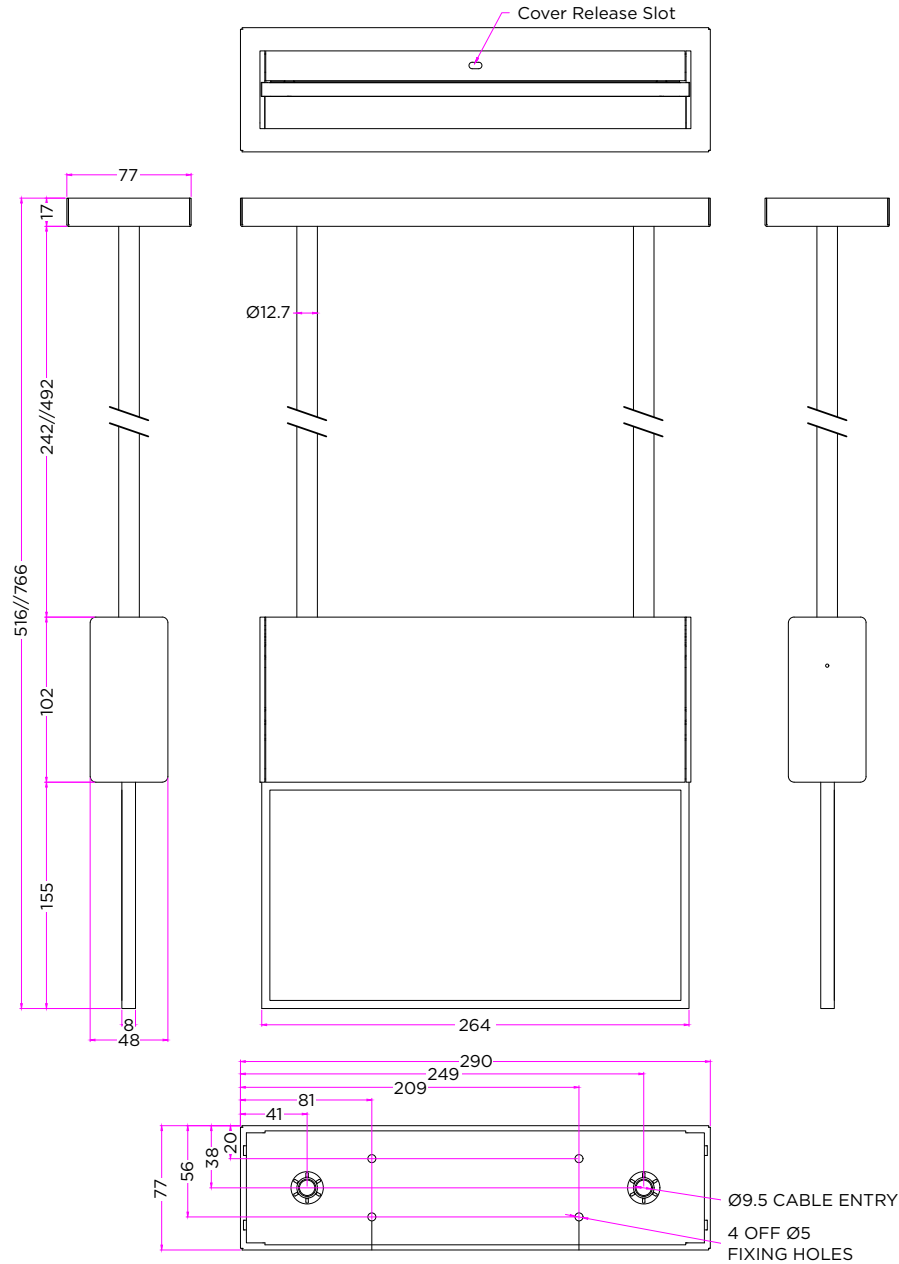

# HENLEY WIRE SUSPENDED



IP20

IK09

26m

1.5

230v


DALI

NM/MM






6

1W

WARRANTY



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

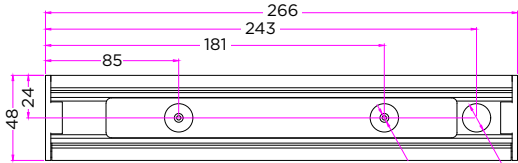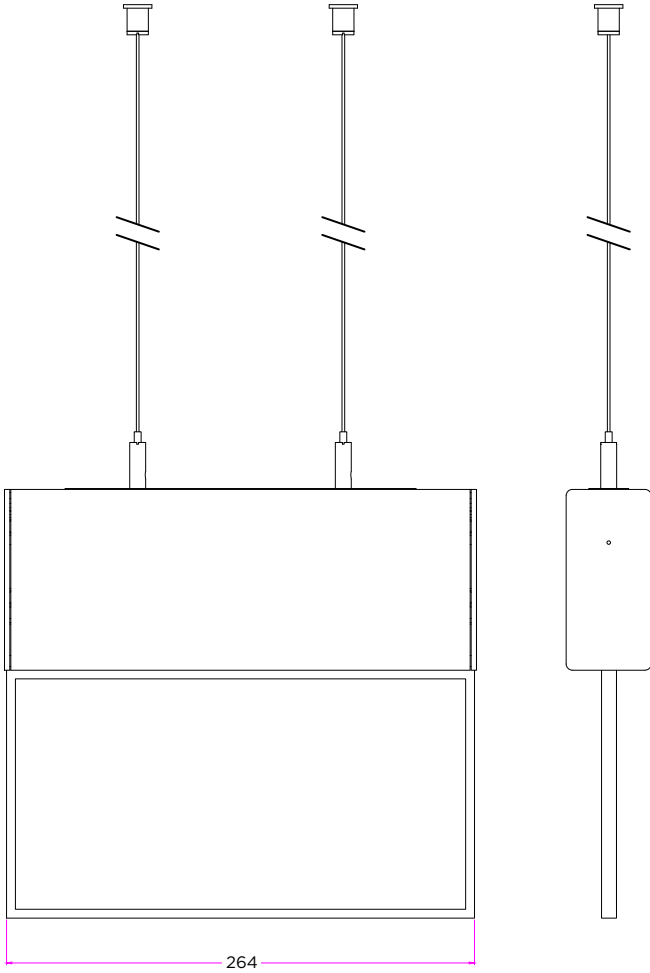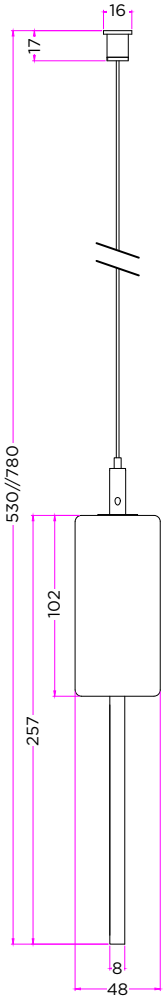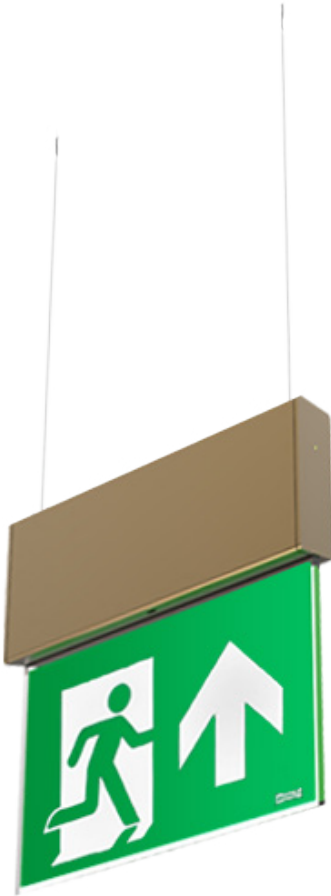

Ø5 FIXING HOLES    Ø16 CABLE ENTRY

## HENLEY



IP20 IK09

26m 1.5

230v DALI

NM/MM

1W 6 WARRANTY



EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

EXAMPLE PRODUCT CODE			HEN	C	S	R	500	DL	W	IS	S	U
FAMILY	HENLEY	HEN										
TYPE	CEILING	C										
MOUNT	SURFACE	S										
VERSION	SUSPENDED ROD	R										
	SUSPENDED WIRE	W										
LENGTH	250mm LENGTH <sup>1</sup>	250										
	500mm LENGTH <sup>1</sup>	500										
CONTROL	MAINS/CENTRAL BATTERY <sup>2</sup>	LA										
	DALI MAINS/CENTRAL BATTERY <sup>2</sup>	DA										
	MAINTAINED SELF-CONTAINED	LM										
	MAINTAINED DALI	DL										
	MAINTAINED SPECTO-XT	XT										
COLOUR	WHITE (RAL 9016)	W										
	BLACK (RAL9005)	K										
	GREY (RAL 9006)	G										
	PENNY BRONZE	V										
	POLISHED CHROME	C										
	ANTIQUE BRASS	E										
	POLISHED BRASS	B										
	SATIN CHROME	R										
LEGEND TYPE	ISO 7010	IS										
LEGEND SIDE	SINGLE SIDED	S										
	DOUBLE SIDED	D										
ARROW DIRECTION	UP	U										
	DOWN	D										
	LEFT	L										
	RIGHT	R										

Example Code HENCSRDLWISSU Henley | Ceiling | Suspended Rod | 500mm Length | DALI Maintained Self-Contained | White (RAL 9016) | ISO 7010 | Single Sided | Up Arrow

For more information on colours, please go to the **Finishes Page**.

<sup>1</sup>Custom lengths available upon request.

<sup>2</sup>For input voltages please refer to our installation leaflets.