

# EXRAIL




- IP66 IK10
- 6 YEAR WARRANTY MM
- 230v DALI




- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

## SPOT

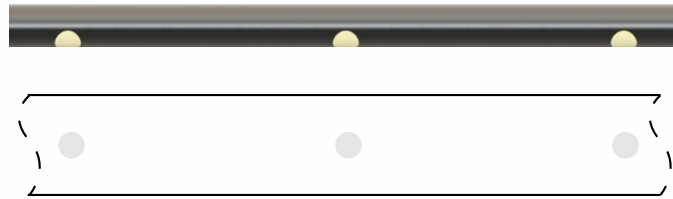


— Exrail handrail    — Light module

## SMALL LINEAR

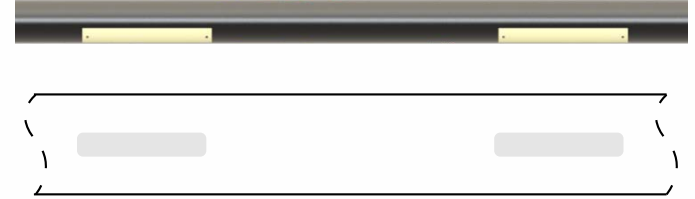


— Exrail handrail    — Light module

## CONTINUOUS LINEAR

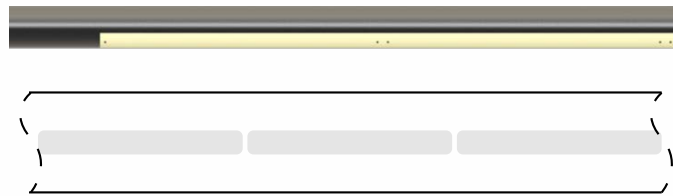

— Exrail handrail    — Light module

## MEDIUM LINEAR

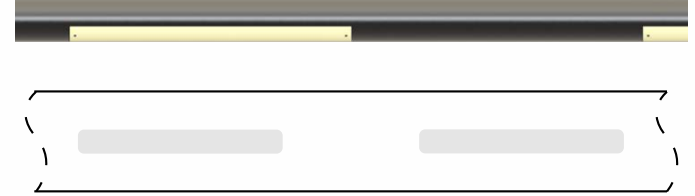

— Exrail handrail    — Light module

# EXRAIL



IP66	IK10
6 WARRANTY	MM [Icon]
230v	DALI [Icon]



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

## Lighting

- 2.5W (Spot)
- 5W (Small linear)
- 8W (Medium linear)
- 5W (Continuous linear)

Asymmetric or symmetric distributions

- Output up to 65 lumens (Spot)
- Output up to 430 lumens (Small linear)
- Output up to 710 lumens (Medium linear)
- Output up to 975 lumens (Continuous linear)

50,000 hour lifetime

CRI >80

2700K, 3000K or 4000K

Non-dimming or DALI

## Emergency data

3-hour operation

## Construction

- 28mm diameter module (Spot)
- 140 x 22mm module (Small linear)
- 300 x 22mm module (Medium linear)
- 300 x 27mm module (Continuous linear)

42.4mm diameter (suitable for 48.3mm diameter handrail)

Clear, diffused or coloured lens options

316 stainless steel (304 stainless steel option)

UV stabilised polycarbonate cover

Vandal resistant corrosion resistant fixings

- 50g (Spot)
- 100g (Small linear)
- 175g (Medium linear)
- 125g (Continuous linear)

## Typical Applications

- |                 |                     |               |                   |                      |
|-----------------|---------------------|---------------|-------------------|----------------------|
| Railway Sidings | Universities        | Footbridges   | Railway Platforms | Commercial Buildings |
| Leisure Centres | Transport Terminals | Urban Centres |                   |                      |