
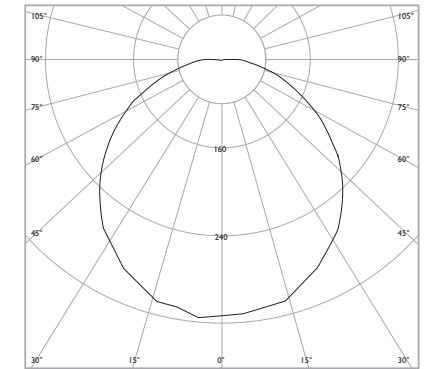


- 230v
- 1.6
- 3hrs
- 4k
- IP44
- DALI
- 6 WARRANTY




**LUMINAIRE LUMEN OUTPUT**

10W = 953lm  
 12W = 1191lm  
 17W = 1553lm

EXAMPLE PRODUCT CODE		ORA	DL	1553	W
<b>PRODUCT</b>	ORA	ORA			
<b>CONTROL</b>	DALI MAINTAINED	DL			
	FIXED OUTPUT/SPECTO-XT EMERGENCY	XT			
	SPECTO-XT DIMMABLE/NON EMERGENCY	MXTR			
	SPECTO-XT DIMMABLE/SPECTO-XT EMERGENCY	XTR			
<b>OUTPUT</b>	953 LUMENS	953			
	1191 LUMENS	1191			
	1553 LUMENS	1553			
<b>COLOUR</b>	WHITE	W			

ORADL1553W ORA | DALI Maintained | 1553 Lumen Output | White finish

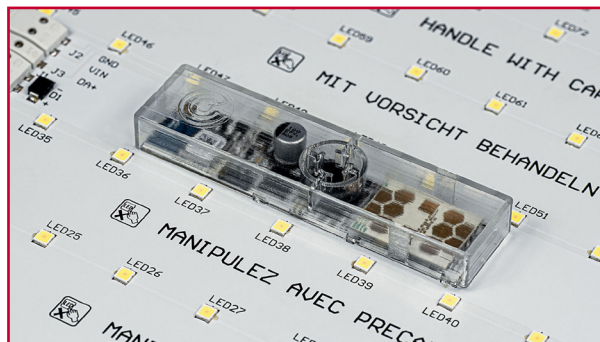

**What is Specto-XT Radar?**

**The latest high frequency sensor technology Specto-XT Radar is mounted directly to the LED light engine, integral to the luminaire and is designed for applications where the luminaire aesthetics and impact rating are important factors.**

**Specto-XT Radar offers energy saving through presence detection and daylight control, user control via timed override from the Specto-XT website.**



## FEATURES & BENEFITS

- Specto-XT wireless technology removes the need for control cabling, ideal for retro-fit installations
- Polycarbonate with UV stabilising cover
- Strong and robust body with high impact resistance
- Tool-less and screw-less cover for ease of installation and maintenance