


PHILIP PAYNE | TYKE 860



EN60598-1	EN61547
EN60598-2-22	EN61000-3-2
EN55015	PC ABS

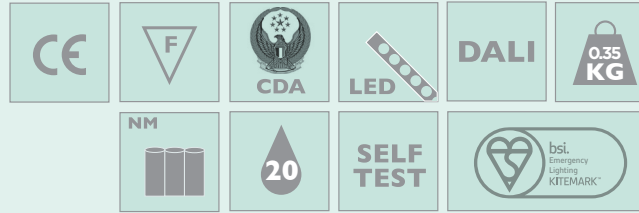

			Wall to Luminaire	Luminaire to Luminaire	Lumen Output	Wattage	Drive Current	Dimensions	Mains	DALi Mains	3hr NM	3hr NM Self Test	3hr NM DALi
TYKA860	2m Wide escape route with 1 lux on centreline	BS5266	5.2m	12.3m	200	2 Watts	600mA		TYKA860LA	TYKA860DA	TYKA860LN	TYKA860YS	TYKA860DS
	Open Area with 0.5 Lux minimum excluding 0.5m border	BS5266	4.8m	10.6m	200	2 Watts	600mA						
TYKC860	2m Wide escape route with 1 lux on centreline	BS5266	6.7m	17.5m	175	2 Watts	600mA		TYKC860LA	TYKC860DA	TYKC860LN	TYKC860YS	TYKC860DS
	Open Area with 0.5 Lux minimum excluding 0.5m border	BS5266	N/A	N/A	175	2 Watts	600mA						
TYKE860	2m Wide escape route with 1 lux on centreline	BS5266	3.7m	8.5m	190	2 Watts	600mA		TYKE860LA	TYKE860DA	TYKE860LN	TYKE860YS	TYKE860DS
	Open Area with 0.5 lux minimum excluding 0.5 border	BS5266	3.5m	7.2m	190	2 Watts	600mA						